



BST1-IOV1HBL


Current Sensors

Description

For the electronic measurement of currents: DC, AC, pulsed, mixed, with a galvanic isolation between the primary circuit and the secondary circuit.

Features

- ◆ Open loop transducer using the Hall effect
- ◆ Low voltage application
- ◆ Unipolar +5VDC power supply
- ◆ Operating temperature range:
 $-40^{\circ}\text{C} < T_A < +125^{\circ}\text{C}$
- ◆ Output voltage: fully ratio-metric(gain and offset)

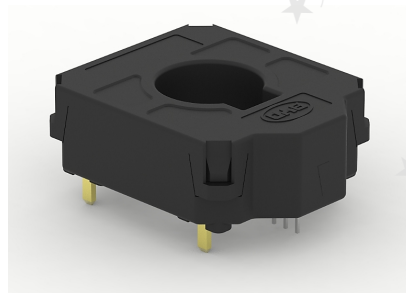

$I_{PN} = 200 \dots 900\text{A}$

Advantages

- ◆ High accuracy
- ◆ Excellent linearity
- ◆ Low temperature drift
- ◆ Hermetic package

Industrial applications

- ◆ Standard battery monitoring
- ◆ Hybrid and EV battery pack current sensing
- ◆ Fuel cell current control
- ◆ DC/DC converters and AC/DC inverters
- ◆ Hybrid and EV motor inverter drive
- ◆ EPS and X-by-wire applications
- ◆ Electric compressors for air conditioning

TYPES OF PRODUCTS		
Type	Primary nominal current I_{PN} (A)	Primary current measuring range I_P (A)
BST1-200IOV1HBL	200	± 200
BST1-300IOV1HBL	300	± 300
BST1-400IOV1HBL	400	± 400
BST1-500IOV1HBL	500	± 500
BST1-600IOV1HBL	600	± 600
BST1-700IOV1HBL	700	± 700
BST1-800IOV1HBL	800	± 800
BST1-900IOV1HBL	900	± 900

**BST1-IOV1HBL**
Current Sensors**Parameters Table**





PARAMETERS	SYMBOL	UNIT	VALUE			CONDITIONS
			Min.	Typ.	Max.	
Electrical data						
Supply voltage	V _c	V	4.75	5	5.25	
Current consumption	I _{cc}	mA	9.5	-	16	@T _A = 25°C
Output Load Capacitance	C _L	nF	-	10	-	@V _{OUT} to GND
Output Load Resistance	R _L	kΩ	5	-	-	@V _{OUT} to GND
Output voltage	V _{OUT}	V	V _c /5× (2.5+2/I _{pn} ×I _p)			@T _A = 25°C V _c =5V
Output Linearity	ε _L	%	-1%	-	+1%	@T _A = 25°C
Accuracy	X	%	-1%	-	+1%	@T _A = 25°C
Quiescent Output Voltage ⁽¹⁾	V _{OUTQ}	V	2.5V±15mV			@T _A = 25°C B=0
Performance data						
Magnetic Sensitivity	Sens	mV/G	0.3	-	18	@T _A = 25°C
Output Bandwidth	BW	kHz	-	30	-	@-3dB
Response time	t _r	μS	-	-	8	
Rms voltage isolation test	V _d	kV	-	-	2	@AC 50Hz 1Min
General data						
Ambient operating temperature	T _A	°C	-40~+125			
Ambient storage temperature	T _S	°C	-40~+125			

Notes:

(1) The indicated offset voltage is the one after the core hysteresis is removed.



BST1-IOV1HBL Current Sensors

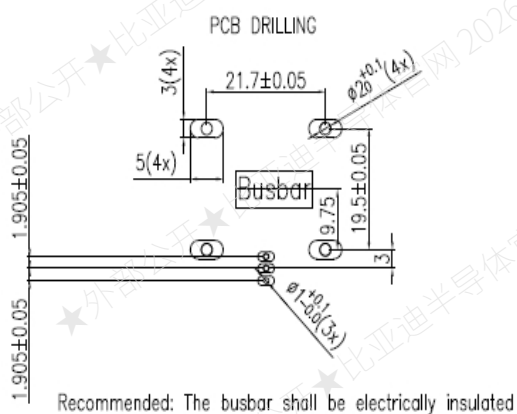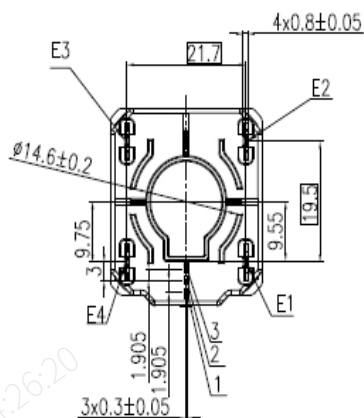
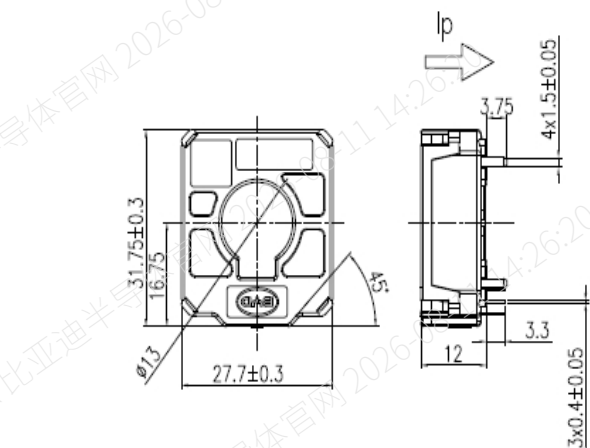


Pins definition


Terminals	Designations
1	Vout
2	GND
3	supply voltage +5VDC
E1 to E4	GND(*)

(*) Only 1 of these 4 pins could be connected

General Tolerance: $\pm 0.3\text{mm}$



Connection schematic

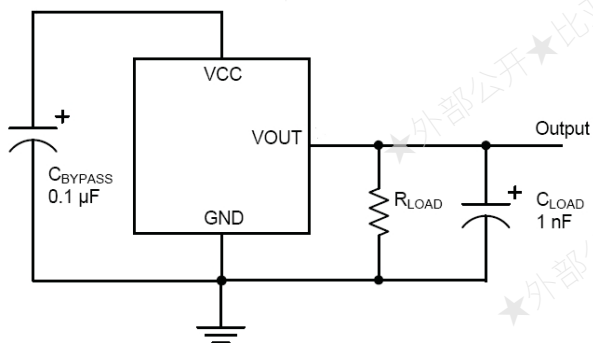



BST1-IOV1HBL

Current Sensors

◆ Instructions of use

1. When the test current passes through the sensors you can get the size of the output voltage.
(Warning: wrong connection may lead to sensors damage.)
2. Based on user needs, the sensors output range can be appropriately regulated.
3. According to user needs, different rated input currents and output voltages of the sensors can be customized.

RESTRICTIONS ON PRODUCT USE

- The information contained herein is subject to change without notice.
- BYD Semiconductor Company Limited exerts the greatest possible effort to ensure high quality and reliability. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing products, to comply with the standards of safety in making a safe design for the entire system, including redundancy, fire-prevention measures, and malfunction prevention, to prevent any accidents, fires, or community damage that may ensue. In developing your designs, please ensure that products are used within specified operating ranges as set forth in the most recent products specifications.
- The products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of products listed in this document shall be made at the customer's own risk.