


NPN Low Vcesat Transistor

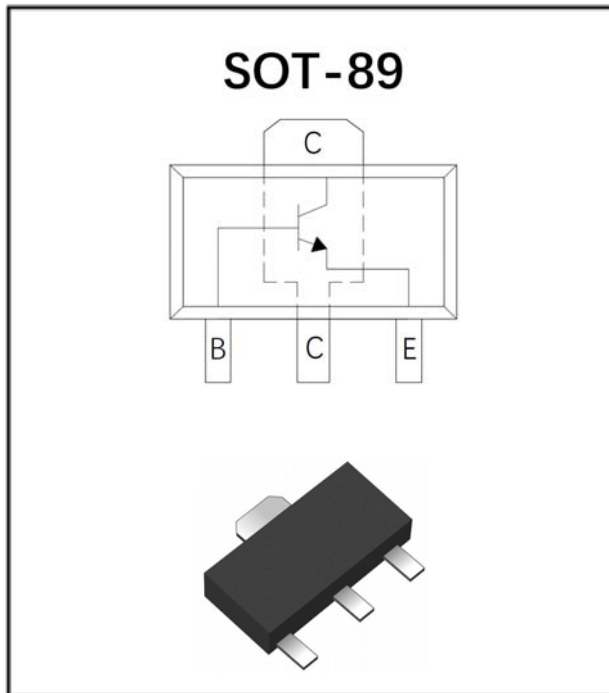

Features

- Moisture Sensitivity Level 1
- Low collector-emitter saturation voltage
- Part no. with suffix "Q" means AEC-Q101 qualified

Application

- DC/DC converters
- MOSFET gate driving
- Motor control
- Power switches

Mechanical Data

- **Package:** SOT-89
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Marking:** 5G.

■Maximum Ratings (Ta=25°C unless otherwise noted)

Item	Symbol	Unit	Value
Minimum Collector-Emitter Voltage	V_{CEO}	V	100
Minimum Collector-Base Voltage	V_{CBO}	V	100
Minimum Emitter-Base Voltage	V_{EBO}	V	5
Collector Current	I_C	A	4.5
Power Dissipation	$P_D^{(1)}$	mW	600
Thermal Resistance From Junction To Ambient	$R_{\theta JA}^{(1)}$	°C/W	208
Operation Junction Temperature	T_J	°C	-55 to +150
Storage Temperature	T_{stg}	°C	-55 to +150

⁽¹⁾ Device mounted on FR4 P.C.B. with standard footprint.



PBSS306NXQ

■Electrical Characteristics (Ta=25℃ unless otherwise noted)

Item	Symbol	Unit	Conditions	Min	TYP	Max
Collector-Emitter Voltage	V_{CBO}	V	$I_C=100\mu A, I_E=0$	100		
Collector-Base Voltage	V_{CEO^*}	V	$I_C=10mA, I_B=0$	100		
Emitter-Base Voltage	V_{EBO}	V	$I_E=100\mu A, I_C=0$	5		
Collector-Base cut-off current	I_{CBO}	nA	$V_{CB}=80V, I_E=0$			100
Collector-Emitter cut-off current	I_{EBO}	nA	$V_{EB}=5V, I_C=0$			100
DC Current Gain	h_{FE}		$V_{CE}=2V, I_C=0.5A$	200		
	h_{FE}		$V_{CE}=2V, I_C=1A$	150		
	h_{FE}		$V_{CE}=2V, I_C=2A$	100		
	h_{FE}		$V_{CE}=2V, I_C=4A$	50		
	h_{FE}		$V_{CE}=2V, I_C=5A$	40		
Collector-Emitter Saturation Voltage	$V_{CE(sat)1}$	mV	$I_C=0.5A, I_B=50mA$			40
	$V_{CE(sat)2}$	mV	$I_C=1A, I_B=50mA$			75
	$V_{CE(sat)3}$	mV	$I_C=1A, I_B=10mA$			150
	$V_{CE(sat)4}$	mV	$I_C=2A, I_B=40mA$			160
	$V_{CE(sat)5}$	mV	$I_C=4A, I_B=200mA$			225
	$V_{CE(sat)6}$	mV	$I_C=4A, I_B=400mA$			200
	$V_{CE(sat)7}$	mV	$I_C=4.5A, I_B=225mA$			245
Equivalent On-resistance	R_{CEsat}	mΩ	$I_C=4A, I_B=200mA$			56
Base-Emitter Saturation Voltage	$V_{BE(sat)1}$	V	$I_C=1A, I_B=100mA$			0.9
	$V_{BE(sat)2}$	V	$I_C=4A, I_B=400mA$			1.05
Base-Emitter Turn-on Voltage	$V_{BE(on)}$	V	$V_{CE}=2V, I_C=2A$			0.85
Transition Frequency	f_T	MHz	$I_C=100mA, V_{CE}=10V, f=100MHz$		100	
Collector Capacitance	Cob	pF	$V_{CB}=10V, I_E=0A, f=1MHz$		25	

■Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
PBSS306NXQ	F2	Approximate 0.055	1000	8000	32000	7" reel



■ Characteristics (Typical)

Fig.1 - Static characteristic

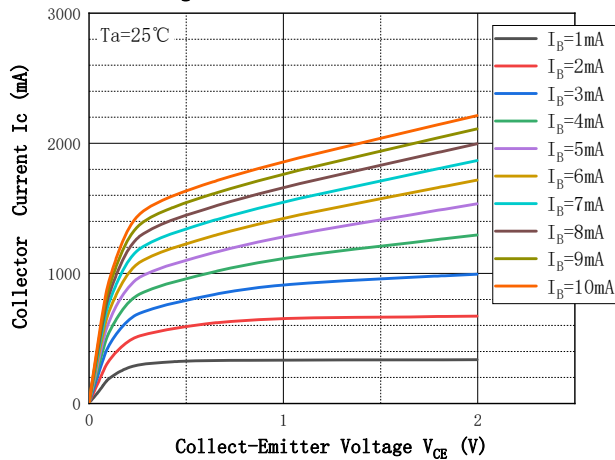


Fig.2 - DC Current Gain

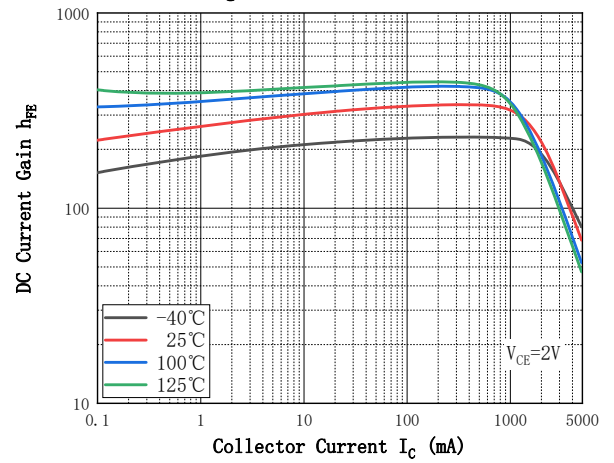


Fig.3 - Collect-Emmitter Saturation Voltage

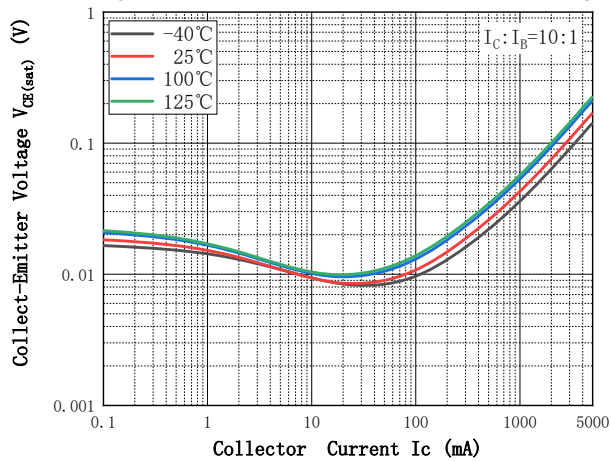


Fig.4 - Collect-Emmitter Saturation Voltage

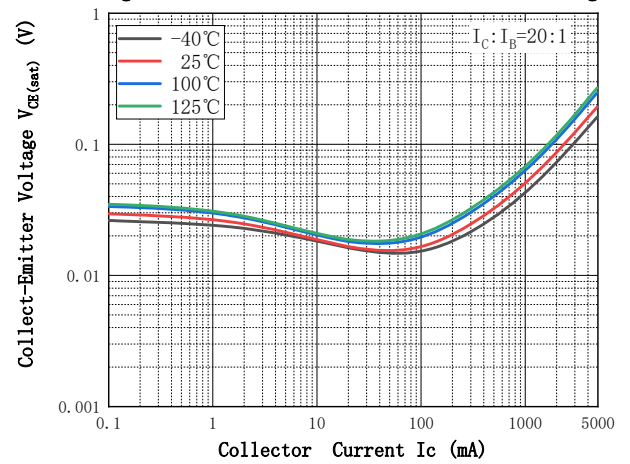


Fig.5 - Base-Emmitter Voltage

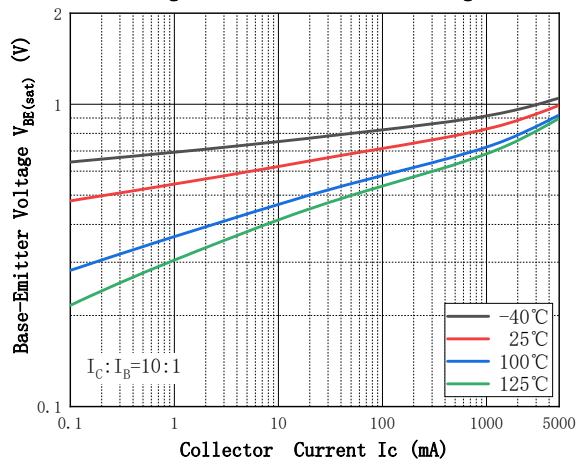


Fig.6 - Base-Emmitter Voltage

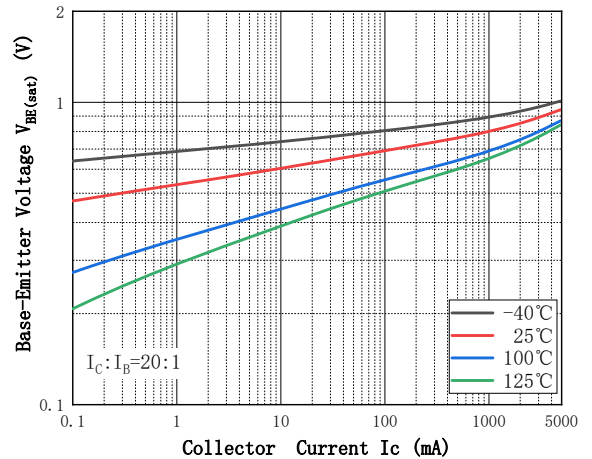




Fig. 7 - Base-Emitter On Voltage

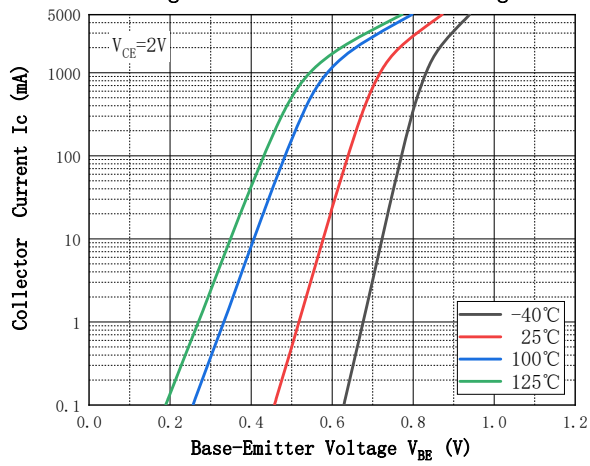


Fig. 8 - Cob/Cib—VCB/VEB


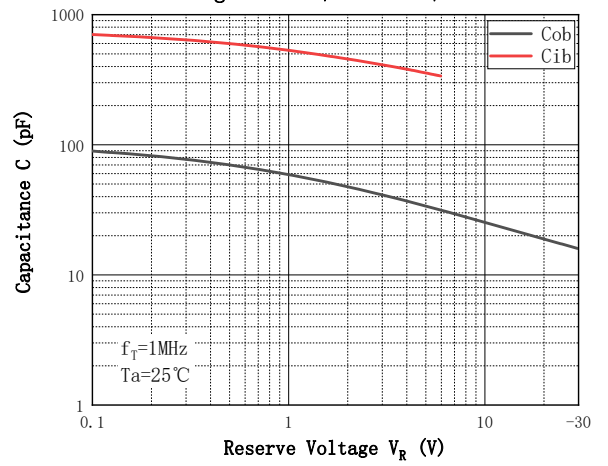



Fig. 9 - Power Derating Curve



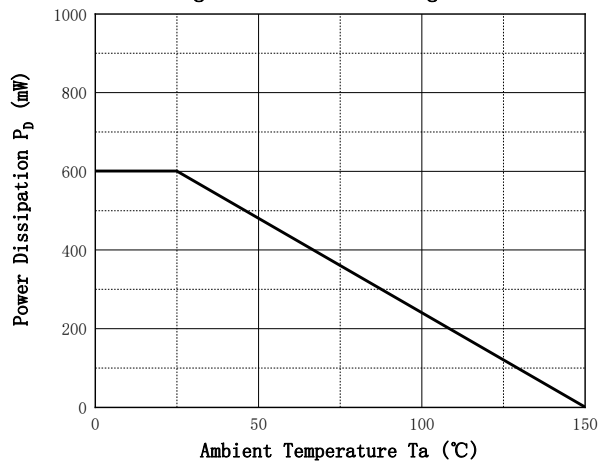


PBSS306NXQ

■SOT-89 Package Outline Dimensions



BOTTOM VIEW




SIDE VIEW



SIDE VIEW

DIM	DIMENSIONS			
	INCHES		MM	
	MIN.	MAX.	MIN.	MAX.
A	0.173	0.181	4.400	4.600
B	0.061 TYP.		1.550 TYP.	
C	0.155	0.167	3.940	4.250
D	0.031	0.047	0.800	1.200
E	0.094	0.102	2.400	2.600
F	0.118 TYP.		3.00 TYP.	
G	0.014	0.019	0.360	0.480
H	0.017	0.022	0.440	0.560
J	0.014	0.017	0.350	0.440
K	0.055	0.063	1.400	1.600
L	0.059 TYP.		1.500 TYP.	
M	0.108 TYP.		2.750 TYP.	

■SOT-89 Suggested Pad Layout

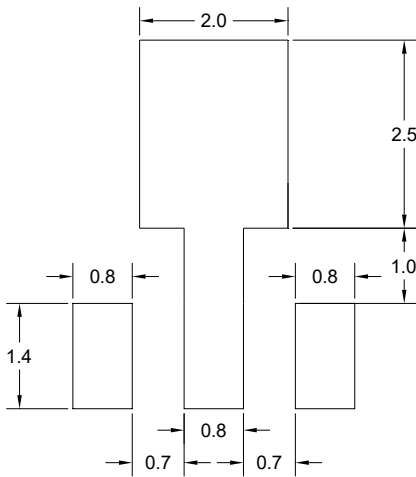

UNIT:MM

SUGGESTED SOLDER PAD LAYOUT



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, life-saving, lifesustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.