



Zener Diode



SOT-23

Features

- Moisture sensitivity level 1
- Zener voltage 2.4V~47V

Application

- Linear voltage regulator
- DC regulator
- Small-signal surge protection

Mechanical data

- **Package:** SOT-23
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102

■Limiting Values (Absolute Maximum Rating, Ta=25℃ Unless otherwise specified)

Characteristic	Symbol	Value	Units
Maximum Forward Voltage @I _F =10mA	V _F	0.9	V
Power Dissipation	P _D	300	mW
Thermal Resistance from Junction to Ambient	R _{θJA}	417	℃ /W
Junction Temperature	T _J	-55~+150	℃
Storage Temperature Range	T _{STG}	-55~+150	℃

■Ordering Information (Example)

PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
AZ23B2V4-AZ23B47	F2	Approximate 0.008	3000	30000	120000	7" reel



AZ23B2V4 THRU AZ23B47

■Electrical Characteristics (T_a=25℃ Unless otherwise specified)

Type Numbe	Marking Code	V _z at I _{zT} (V)			Z _{zt} (Ω)		Z _{zk} (Ω)		I _R (μA)@V _R		Diode capacitance Cd (pF)	Non-repetitive peak reverse current I _{zsm} (A)
		Min.	Typ.	Max.	Max.	I _{zT} (mA)	Max.	I _{zk} (mA)	Max	V _R (V)	Max	Max
AZ23B2V4	D0	2.34	2.4	2.46	100	5	600	1	45	1.0	450	6
AZ23B2V7	D1	2.63	2.7	2.77	100	5	600	1	20	1.0	450	6
AZ23B3V0	D2	2.92	3.0	3.08	100	5	600	1	9	1.0	450	6
AZ23B3V3	D3	3.21	3.3	3.39	95	5	600	1	4.5	1.0	450	6
AZ23B3V6	D4	3.52	3.6	3.67	95	5	600	1	15	1.0	450	4.5
AZ23B3V9	D5	3.82	3.9	3.98	95	5	600	1	10	1.0	450	4.5
AZ23B4V3	D6	4.21	4.3	4.39	95	5	600	1	5	1.0	450	3.5
AZ23B4V7	D7	4.61	4.7	4.79	78	5	500	1	5	2.0	300	3.5
AZ23B5V1	D8	5.0	5.1	5.2	60	5	480	1	0.1	0.8	300	3
AZ23B5V6	D9	5.49	5.6	5.71	40	5	400	1	0.1	1.0	200	3
AZ23B6V2	DA	6.08	6.2	6.32	10	5	150	1	0.1	2.0	200	3
AZ23B6V8	DB	6.66	6.8	6.94	8	5	80	1	0.1	3.0	200	2
AZ23B7V5	DC	7.35	7.5	7.65	7	5	80	1	0.1	5.0	150	2
AZ23B8V2	DD	8.04	8.2	8.36	7	5	80	1	0.1	6.0	150	2
AZ23B9V1	DE	8.92	9.1	9.28	10	5	100	1	0.1	7.0	150	1.8
AZ23B10	DF	9.8	10	10.2	15	5	150	1	0.1	7.5	90	1.8
AZ23B11	DG	10.78	11	11.22	20	5	150	1	0.1	8.5	85	1.8
AZ23B12	DH	11.76	12	12.24	20	5	150	1	0.1	9.0	85	1.8
AZ23B13	DI	12.74	13	13.3	25	5	170	1	0.1	10.0	80	1
AZ23B15	DJ	14.7	15	15.3	30	5	200	1	0.1	11.0	75	1
AZ23B16	DK	15.68	16	16.3	40	5	200	1	0.1	12	75	1
AZ23B18	DL	17.6	18	18.4	50	5	225	1	0.1	14.0	70	1
AZ23B20	DM	19.6	20	20.4	55	5	225	1	0.1	15.0	60	1
AZ23B22	DN	21.56	22	22.44	55	5	250	1	0.1	17.0	60	0.6
AZ23B24	DO	23.52	24	24.5	70	5	250	1	0.1	18.0	55	0.6
AZ23B27	DP	26.46	27	27.54	80	5	300	1	0.1	20.0	50	0.6
AZ23B30	DQ	29.4	30	30.6	80	5	300	1	0.1	22.5	50	0.6
AZ23B33	DR	32.34	33	33.7	80	5	325	1	0.1	25.0	45	0.6
AZ23B36	DS	35.28	36	36.72	90	5	350	1	0.1	27.0	45	0.6
AZ23B39	DT	38.22	39	39.8	90	5	350	1	0.1	29.0	45	0.6
AZ23B43	D30	42.14	43	43.86	100	5	375	1	0.1	32.0	40	0.6
AZ23B47	D31	46.06	47	47.94	110	5	375	1	0.1	35.0	40	0.5



AZ23B2V4 THRU AZ23B47

■ Characteristics(Typical)

Fig 1: P_D - T_A Curve

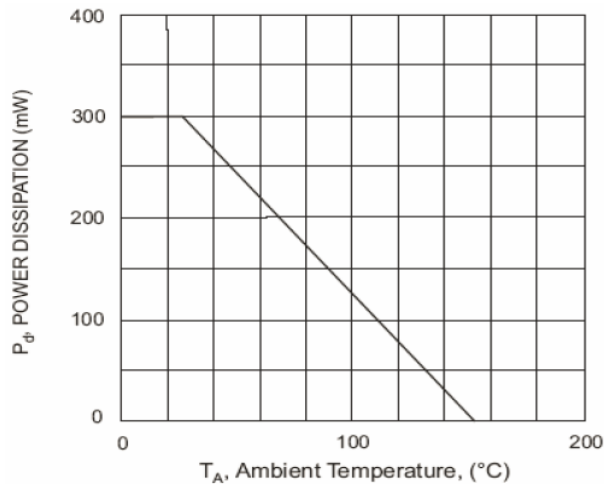


Fig 2: Zener Breakdown Characteristics

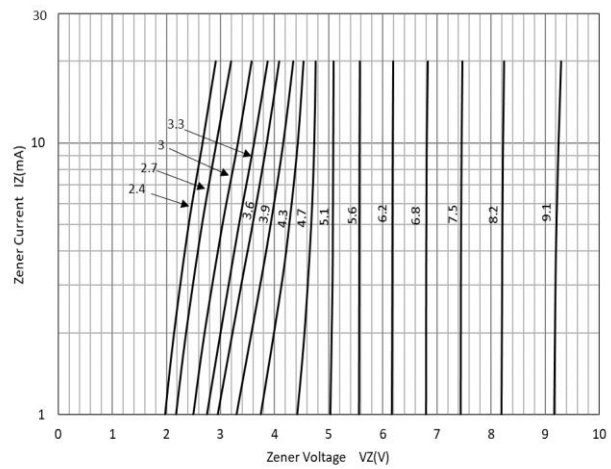


Fig 3: Zener Breakdown Characteristics

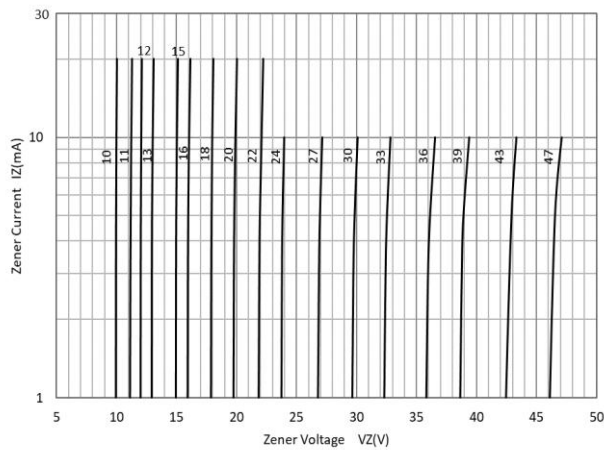


Fig 4 Typical Temperature Coefficient

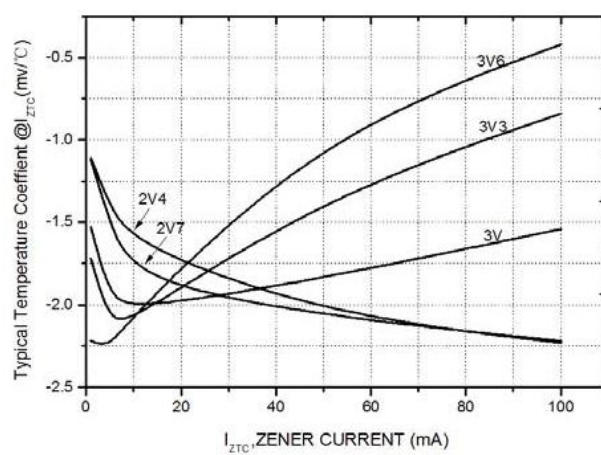


Fig 5 Typical Temperature Coefficient


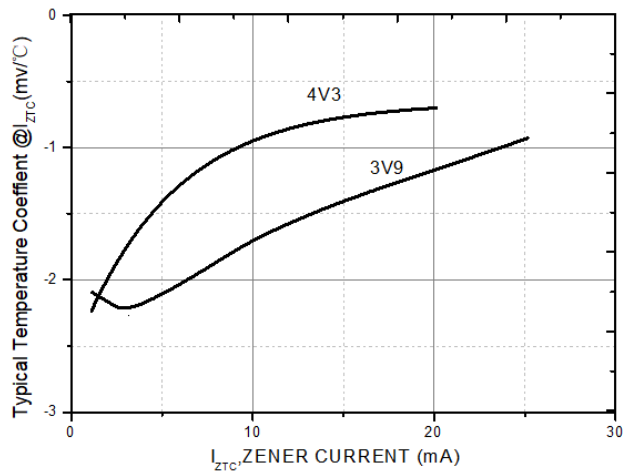


Fig 6: Typical Temperature Coefficient



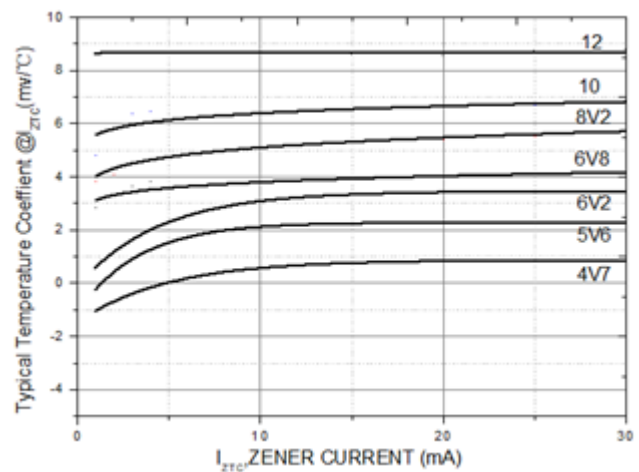

AZ23B2V4 THRU AZ23B47

Fig 7: Typical Temperature Coefficient

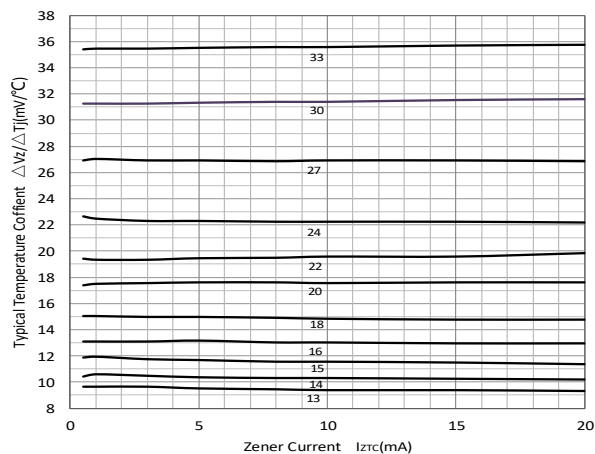


Fig 8: Typical Temperature Coefficient

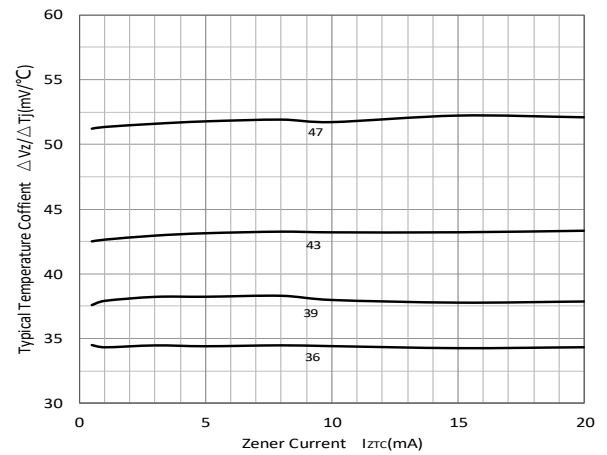


Fig 9: Typical Forward Voltage

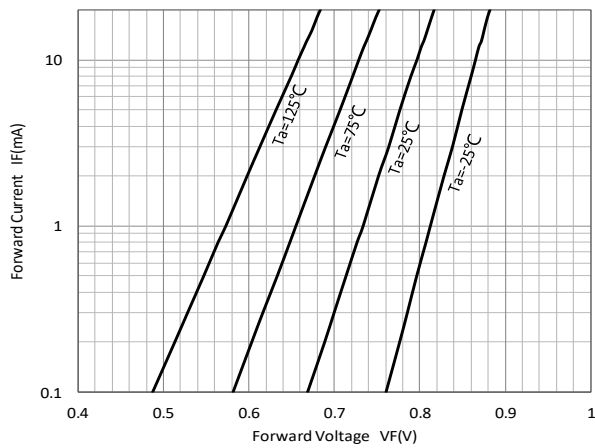


Fig 10: Typical Reverse Current


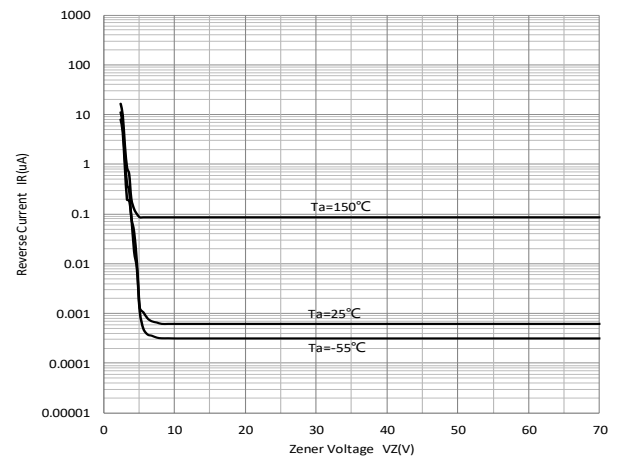


Fig 11: Typical Capacitance





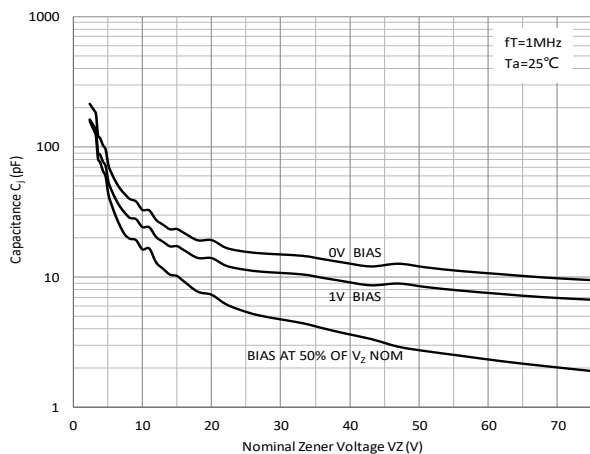

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.