



Schottky Rectifier Modules

V_{RRM} 200V
I_{FAV} 600 A

V_{RSM} 200V


Applications

- Plating Power Supply
- High Frequency Power Supply
- High Current Switching Power Supply
- Free Wheeling Diode In Converters And Motor Control Circuits
- Welding Machine

Features

- Low Noise Switching
- Low Forward Voltage
- Extremely Low Switching Losses
- Isolation Voltage 3000V
- Low I_{rrm} Values

Circuit



Maximum Ratings

Symbol	Conditions	Values	Units
V _{RRM}	T _J =25°C	200	V
I _{F(AV)}	T _C =90°C; rectangular, d=0.5	600	A
I _{FRMS}	T _C =90°C	848	A
I _{FSM}	T _J =45°C, t=10ms (50Hz), Sine	6000	A
I ² t	T _J =45°C, t=10ms (50Hz), Sine	180000	A ² s
T _J		-40 to +150	°C
T _{STG}		-40 to +125	°C
Visol	AC (50Hz), ton=1min	3000	V
Torque	Recommended (M6)	4.5	N·m
Torque	Recommended (M6)	4.5	N·m
Weight		160	g

Thermal Characteristics

Symbol	Conditions	Values	Units
R _{th(j-c)}	Per Module	0.1	°C/W

Electrical Characteristics

Symbol	Conditions	Values			Units
		Min.	Typ.	Max.	
I _{RM}	V _R =200V	--	--	1	mA
	V _R =200V, T _J =125°C	--	--	100	mA
V _F	I _F =300A, T _J =25°C	--	0.87	0.95	V
	I _F =300A, T _J =125°C	--	0.77	0.84	
	I _F =520A, T _J =25°C		1	1.1	
	I _F =520A, T _J =125°C		0.93	1.05	



Performance Curves

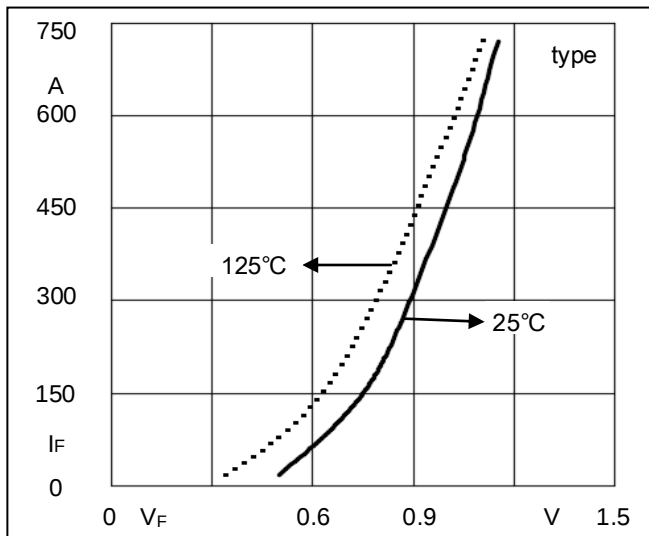


Fig1. Forward Voltage Drop vs Forward Current

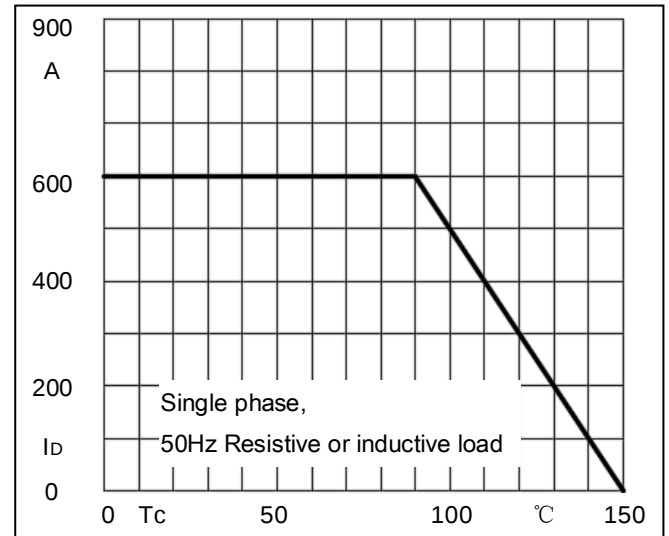


Fig2. Forward Current Derating Curve


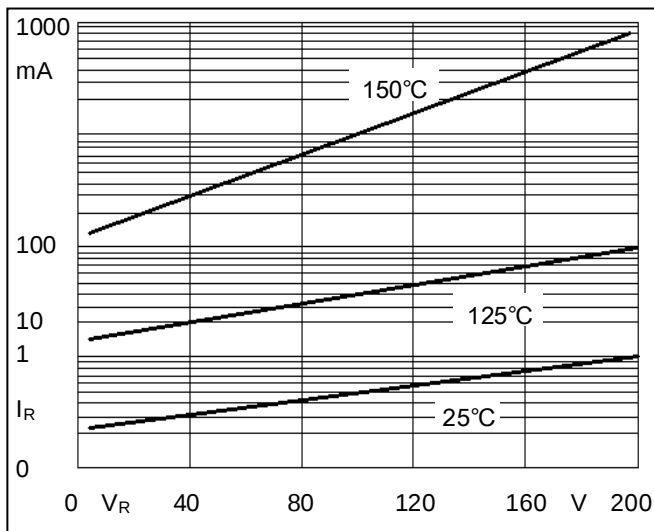


Fig3. Typical Reverse Current



Package Outline Information

CASE: F2

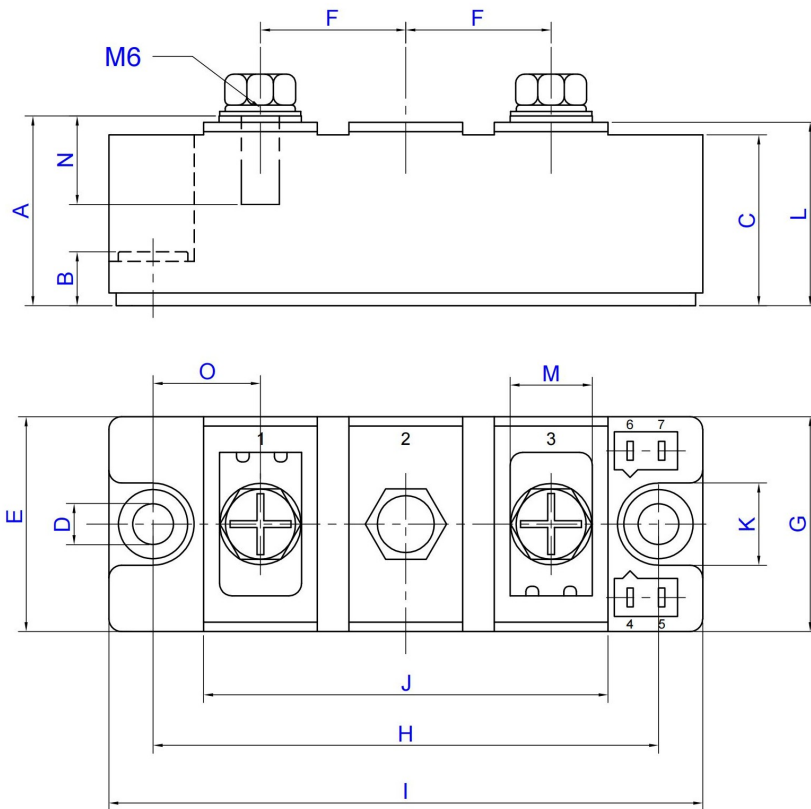

DIM	Min (mm)	Max (mm)	Note
A	29.5	30.5	
B	8.0	9.0	
C	26.5	27.5	
D	6.2	6.8	Ø
E	33.5	34.5	
F	22.5	23.5	
G	12.9	13.1	
H	79.5	80.5	
I	93.5	94.5	
J	63.5	64.5	
K	12.5	13.5	
L	28.5	29.5	
M	12.5	13.5	
N	13.5	14.5	
O	16.5	17.5	

Packing Standard

Item	Length: A (mm)	Width: B (mm)	Height: C (mm)	Quantity (PCS)
Inner Box	276	258	48	8
Outer Carton	545	295	240	80



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, life-saving, lifesustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <http://www.21yangjie.com>, or consult your nearest Yangjie's sales office for further assistance.