

Rectifier Diode Module

VRRM 1200 to 1800V

IFAV 1050A


Applications

- Bridge Circuits
- Industry converter
- Battery Supplies

Features

- International standard package
- High Surge Capability
- Simple Mounting

Circuit



Blocking Characteristics

TYPE	VRRM	VRSM	Units
MD1050U12I6	1200	1300	V
MD1050U14I6	1400	1500	V
MD1050U16I6	1600	1760	V
MD1050U18I6	1800	2000	V

Maximum Ratings

Symbol	Conditions	Values	Units
IFAV	Single phase ,half wave 180° conduction Tc=100℃	1050	A
IFSM	t=10ms Tvj=TvjM	28000	A
i ² t	t=10ms Tvj=TvjM	3920000	A ² s
V _{isol}	a.c.50HZ;r.m.s.;1min,I _{iso} :2mA(max)	3000	V
Tvj		-40 to 150	℃
Tstg		-40 to 125	℃
Mt	To terminals(M12)	13±15%	Nm
Ms	To heatsink(M6)	6±15%	Nm
Weight	Module (Approximately)	2680	g

Thermal Characteristics

Symbol	Conditions	Values	Units
Rth(j-c)	per diode	0.045	℃/W
Rth(c-s)	per diode	0.010	℃/W

Electrical Characteristics

Symbol	Conditions	Values			Units
		Min.	Typ.	Max.	
V _{FM}	T=25℃ IF =3000A			1.35	V
I _{RRM}	Tvj=TvjM V=VRRM			20	mA
V _{FO}	Tvj=TvjM			0.8	V
r _F	Tvj=TvjM			0.1	mΩ

Performance Curves

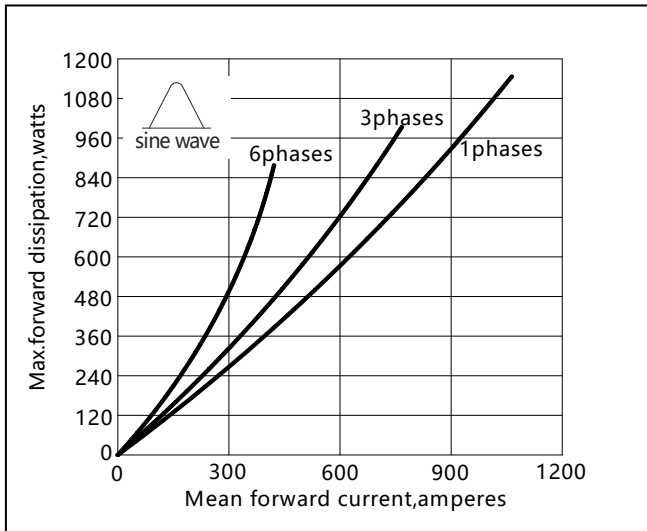


Fig1. Power dissipation

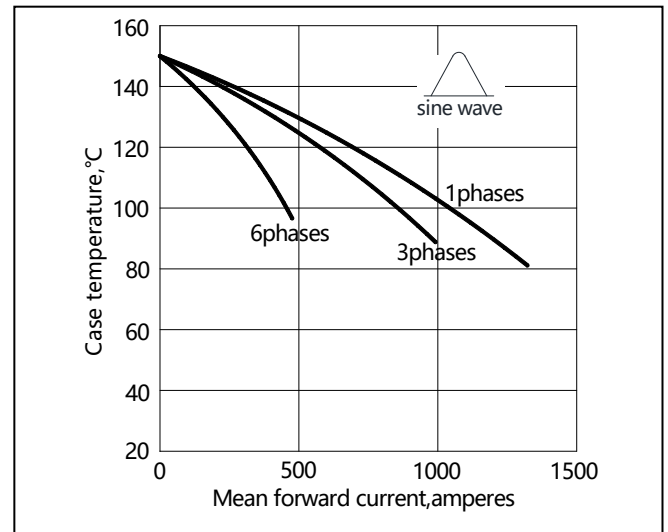


Fig2. Forward Current Derating Curve

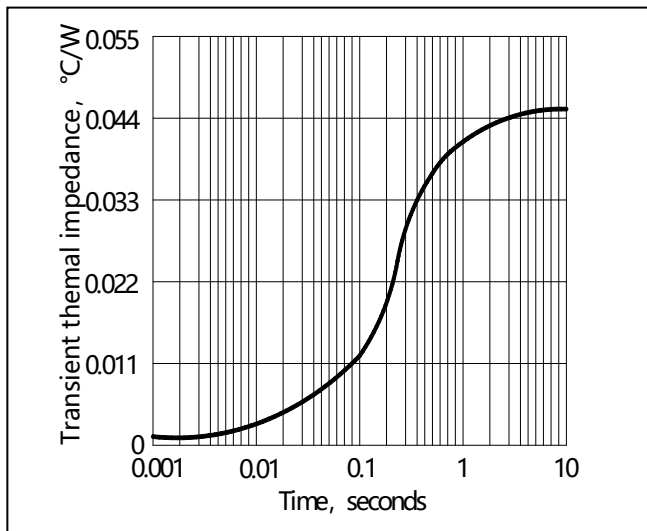


Fig3. Transient thermal impedance

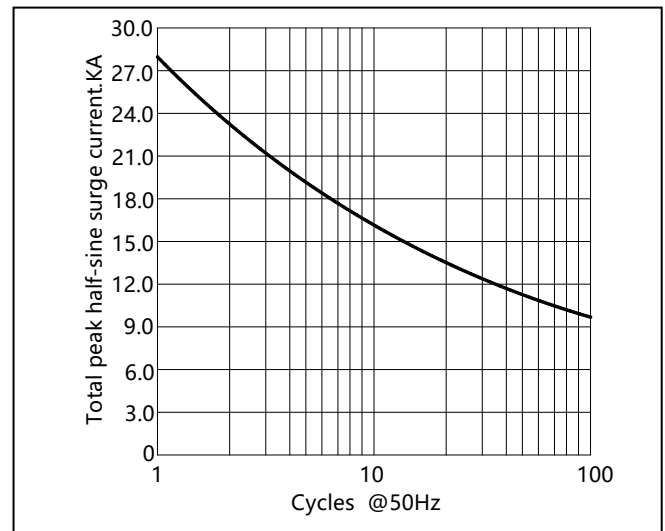


Fig4. Max Non-Repetitive Forward Surge Current


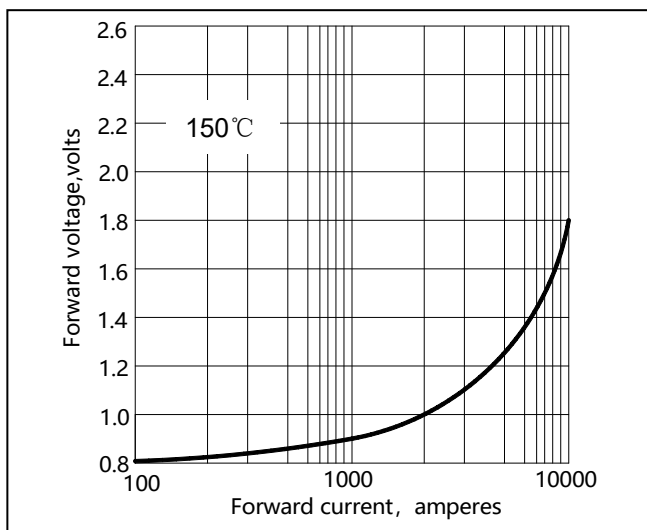


Fig5. Forward Characteristics

Package Outline Information

CASE: I6

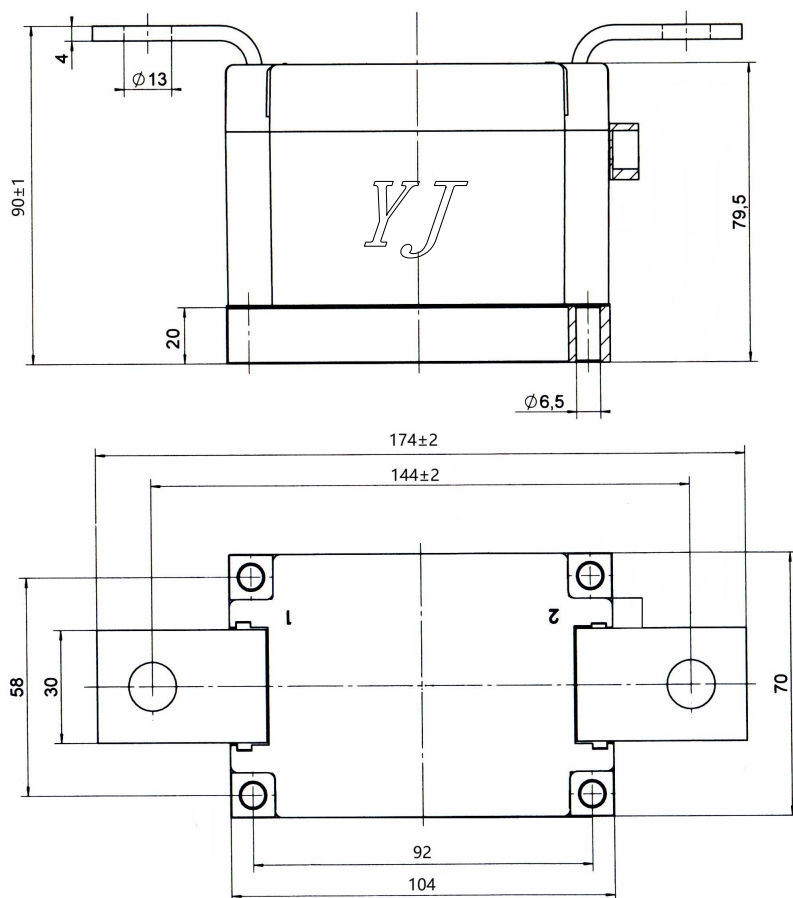

Dimensions in mm

Unmarked dimensional tolerance: $\pm 0.5\text{mm}$



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function, or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <http://www.21yangjie.com>, or consult your nearest Yangjie's sales office for further assistance.