

Rectifier Diode Module

VRRM 2000 to 2500V

IFAV 1200A

Applications


- Bridge Circuits
- Industry converter
- Battery Supplies

Features

- International standard package
- High Surge Capability
- Simple Mounting



Circuit



Blocking Characteristics

TYPE	VRRM	VRSM	Units
MD1200U20I6	2000	2200	V
MD1200U22I6	2200	2400	V
MD1200U24I6	2400	2600	V
MD1200U25I6	2500	2700	V

Maximum Ratings

Symbol	Conditions	Values	Units
IFAV	Single phase ,half wave 180° conduction Tc=100℃	1200	A
IFSM	t=10ms Tvj=TvjM	30000	A
i ² t	t=10ms Tvj=TvjM	4500000	A ² s
Visol	a.c.50HZ;r.m.s.;1min,I _{iso} :2mA(max)	3000	V
Tvj		-40 to 150	℃
Tstg		-40 to 125	℃
Mt	To terminals(M12)	13±15%	Nm
Ms	To heatsink(M6)	6±15%	Nm
Weight	Module (Approximately)	2700	g

Thermal Characteristics

Symbol	Conditions	Values	Units
Rth(j-c)	per diode	0.042	℃/W
Rth(c-s)	per diode	0.010	℃/W

Electrical Characteristics

Symbol	Conditions	Values			Units
		Min.	Typ.	Max.	
VFM	T=25℃ IF =3000A			1.22	V
IRRM	Tvj=TvjM V=VRRM			40	mA
VFO	Tvj=TvjM			0.69	V
rF	Tvj=TvjM			0.10	mΩ

Performance Curves

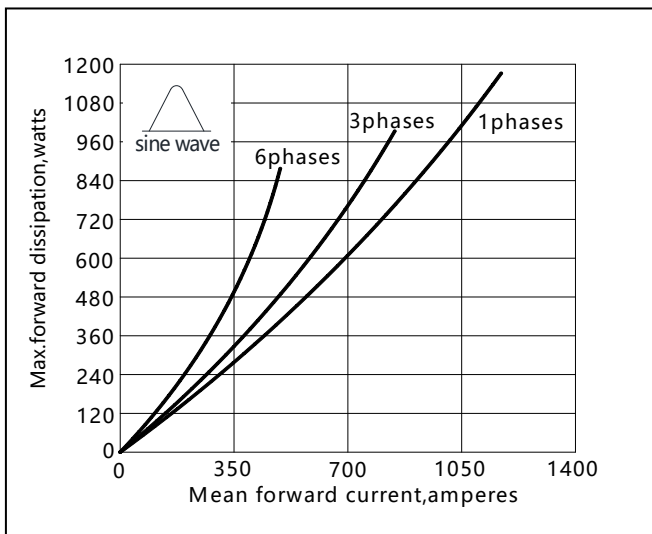


Fig1. Power dissipation

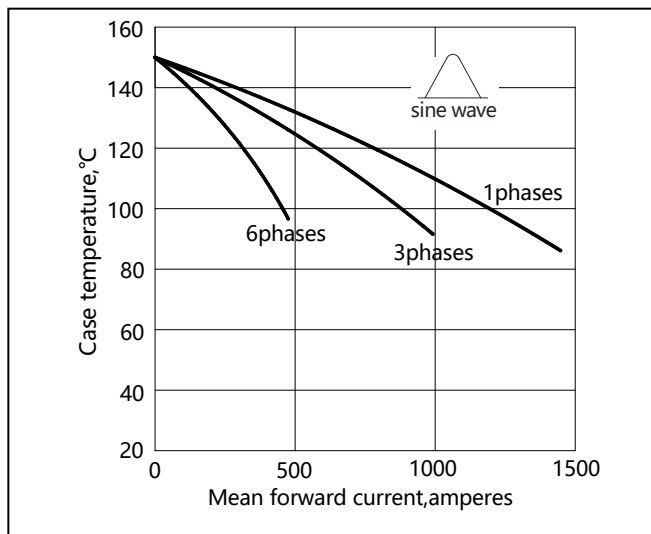


Fig2. Forward Current Derating Curve

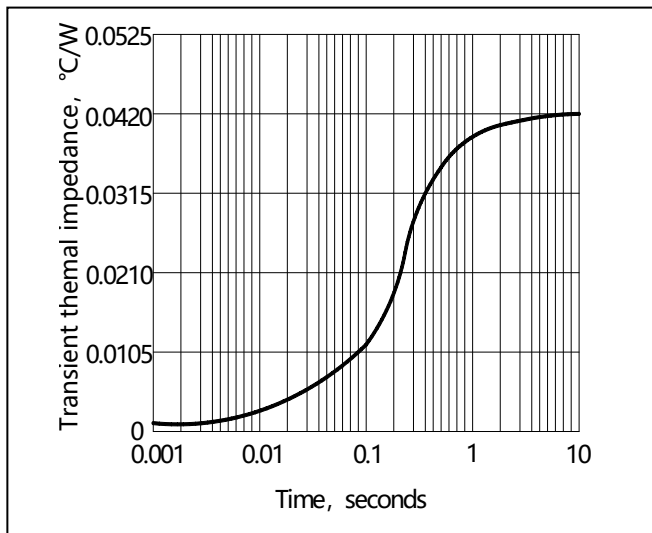


Fig3. Transient thermal impedance

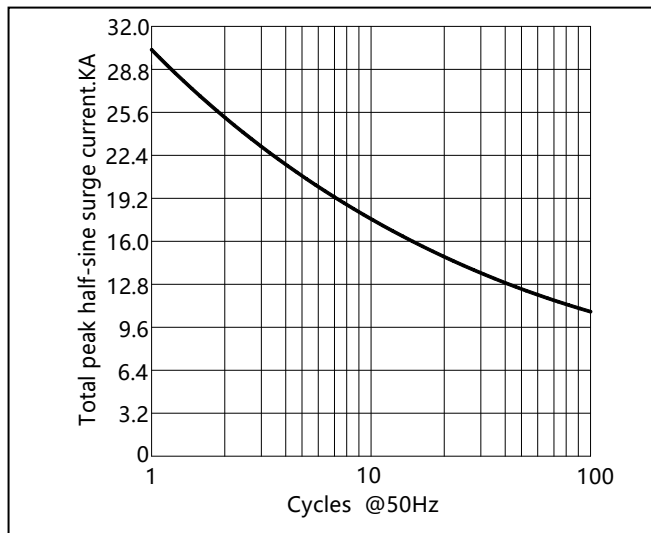


Fig4. Max Non-Repetitive Forward Surge Current


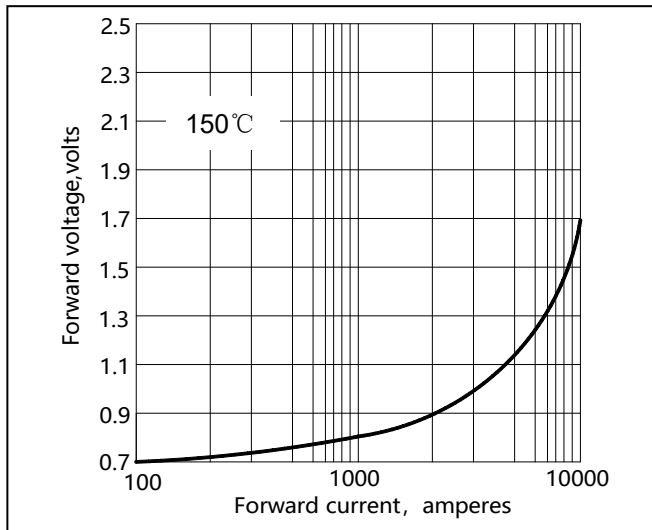


Fig5. Forward Characteristics

Package Outline Information

CASE: I6

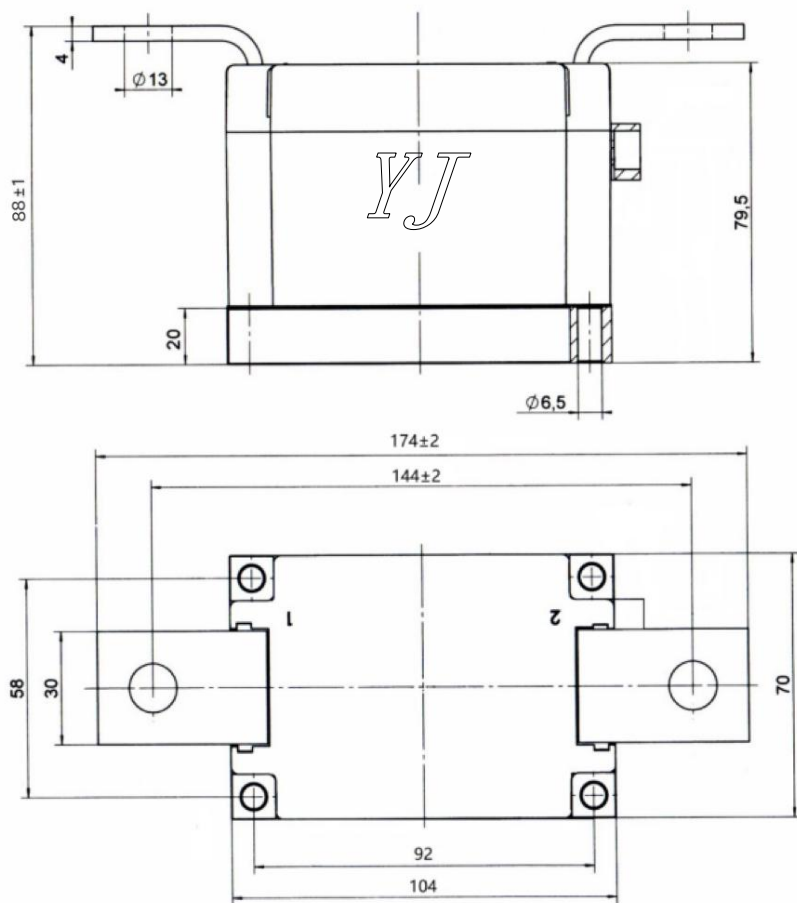

Dimensions in mm

Unmarked dimensional tolerance: $\pm 0.5\text{mm}$



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function, or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <http://www.21yangjie.com> , or consult your nearest Yangjie's sales office for further assistance.