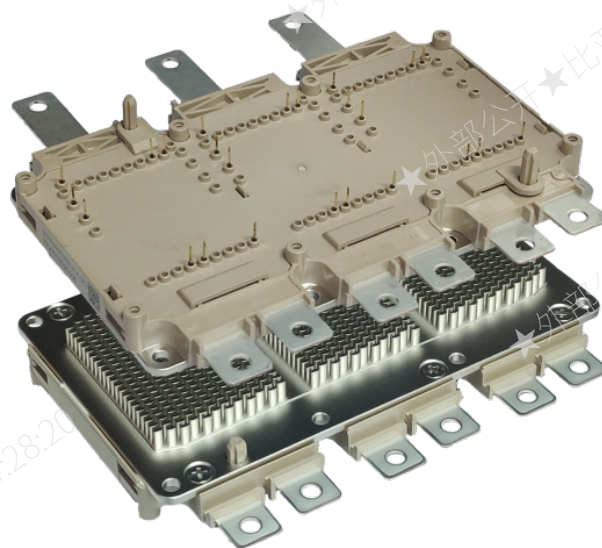


BGW600F08B14L6-DL

IGBT Power Module

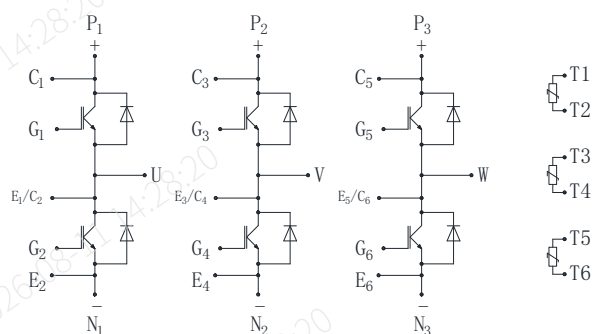
* General Description

BYD IGBT Power Module BGW600F08B14L6-DL provides low conduction and switching loss as well as short circuit ruggedness. which introduce the advanced Fine Trench & field stop IGBT chip and ultra fast & soft recovery anti-parallel FRD to improved connection, it is able to take on a perfect performance in various applications with switching frequencies in the range of 10KHz.



* Key Features

- Full bridge module
- Compact & High power density design
- 750V Fine Trench&field stop technology
- Ultra low conduction and switching loss
- Short circuit ruggedness
- Including ultra fast & soft recovery anti-parallel FRD
- Low Inductive Design
- The direct cooled oval PinFin Base Plate
- $T_{vj\ op}=150^{\circ}\text{C}$
- Short-time extended Operation Temperature $T_{vj\ op}=175^{\circ}\text{C}$
- RoHS compliant



* Applications

- ☐ Automotive application
- ☐ Hybrid and electric vehicle
- ☐ Inverters for motor drive

**BGW600F08B14L6-DL**

● IGBT

□ Maximum Rated Values

Symbol	Parameter	Conditions	Value	Unit
V_{CES}	Collector-emitter voltage	$T_{vj}=25^{\circ}\text{C}$	750	V
V_{GES}	Gate-emitter voltage	$T_{vj}=25^{\circ}\text{C}$	± 20	V
I_{CN}	Implemented Collector current		600	A
$I_{C\text{ nom}}$	Continuous DC Collector current	$T_F=65^{\circ}\text{C}$, $T_{vj\text{ max}}=175^{\circ}\text{C}$	450	A
I_{CRM}	Repetitive peak collector current	Pulse, $t_P=1\text{ms}$, $T_{vj}=25^{\circ}\text{C}$	1200	A
P_{tot}	Total power dissipation	$T_F=65^{\circ}\text{C}$, $T_{vj\text{ max}}=175^{\circ}\text{C}$	688	W

□ Characteristics Values

Symbol	Parameter	Conditions	Value			Unit
			Min.	Typ.	Max.	
$V_{CE\text{ sat}}$	Collector-Emitter Saturation Voltage	$I_C=450\text{A}$, $V_{GE}=15\text{V}$, $T_{vj}=25^{\circ}\text{C}$		1.38		V
		$I_C=450\text{A}$, $V_{GE}=15\text{V}$, $T_{vj}=150^{\circ}\text{C}$		1.55		
		$I_C=450\text{A}$, $V_{GE}=15\text{V}$, $T_{vj}=175^{\circ}\text{C}$		1.57		
		$I_C=600\text{A}$, $V_{GE}=15\text{V}$, $T_{vj}=25^{\circ}\text{C}$		1.54		
		$I_C=600\text{A}$, $V_{GE}=15\text{V}$, $T_{vj}=175^{\circ}\text{C}$		1.80		
V_{GEth}	Gate threshold voltage	$V_{CE}=V_{GE}$, $I_C=6.4\text{mA}$, $T_{vj}=25^{\circ}\text{C}$	4.9	5.8	6.5	V
Q_G	Gate charge	$V_{GE}=-8\text{V}\dots+15\text{V}$, $V_{CE}=400\text{V}$		1.24		μC
R_{Gint}	Internal gate Resistance	$T_{vj}=25^{\circ}\text{C}$		1.2		Ω
C_{ies}	Input capacitance	$T_{vj}=25^{\circ}\text{C}$, $f=100\text{KHz}$, $V_{CE}=50\text{V}$, $V_{GE}=0\text{V}$		26.28		nF
C_{oes}	Output capacitance			1.03		nF
C_{res}	Reverse capacitance			0.13		nF
I_{CES}	Collector-emitter cut-off current	$V_{CE}=750\text{V}$, $V_{GE}=0\text{V}$, $T_{vj}=25^{\circ}\text{C}$			1	mA
I_{GES}	Gate-emitter leakage current	$V_{CE}=0\text{V}$, $V_{GE}=20\text{V}$, $T_{vj}=25^{\circ}\text{C}$			400	nA

**BGW600F08B14L6-DL**

t _{don}	Turn-on delay time	I _C = 450 A V _{CE} = 450 V V _{GE} =-8V...+15 V R _{Gon} = 2.5Ω R _{Goff} =16.5Ω L _S =30nH	T _{vj} =25℃		212		ns	
			T _{vj} =150℃		228		ns	
			T _{vj} =175℃		230		ns	
t _r	Rise time		T _{vj} =25℃		83		ns	
			T _{vj} =150℃		106		ns	
			T _{vj} =175℃		110		ns	
t _{d off}	Turn-off delay time,		T _{vj} =25℃		827		ns	
			T _{vj} =150℃		896		ns	
			T _{vj} =175℃		917		ns	
t _f	Fall time		T _{vj} =25℃		56		ns	
			T _{vj} =150℃		77		ns	
			T _{vj} =175℃		84		ns	
E _{on}	Turn-on energy loss		T _{vj} =25℃		20.3		mJ	
			T _{vj} =150℃		33.7		mJ	
			T _{vj} =175℃		37.6		mJ	
E _{off}	Turn-off energy loss		T _{vj} =25℃		22.2		mJ	
			T _{vj} =150℃		29.1		mJ	
			T _{vj} =175℃		31.0		mJ	
I _{sc}	SC data		V _{GE} ≤15V,V _{CC} =450V V _{CEmax} =V _{CES} -L _{sCE} *di/dt	tp≤6us,Tvj=25℃		2300		A
				tp≤3us,Tvj=175℃		1770		

● Diode

□ Maximum Rated Values

Symbol	Parameter	Conditions	Value	Unit
V_{RRM}	Repetitive peak reverse voltage	$T_{vj} = 25^\circ\text{C}$	750	V
I_{FN}	Implemented forward current		600	A
I_F	Continuous DC forward current		450	A
I_{FRM}	Repetitive peak forward current	Pulse, $t_p = 1\text{ ms}$, $T_{vj} = 25^\circ\text{C}$	1200	A
I^2t	I^2t -value	$V_R = 0\text{ V}$, $t_p = 10\text{ ms}$, $T_{vj} = 150^\circ\text{C}$ $V_R = 0\text{ V}$, $t_p = 10\text{ ms}$, $T_{vj} = 175^\circ\text{C}$	18000 16000	A ² s A ² s

**BGW600F08B14L6-DL**□ **Characteristics Values**

Symbol	Parameter	Conditions	Value			Unit	
			Min.	Typ.	Max.		
V _F	Forward voltage	I _F =450A, V _{GE} =0V, T _{vj} =25℃		1.54		V	
		I _F =450A, V _{GE} =0V, T _{vj} =150℃		1.49			
		I _F =450A, V _{GE} =0V, T _{vj} =175℃		1.42			
		I _F =600A, V _{GE} =0V, T _{vj} =25℃		1.66			
		I _F =600A, V _{GE} =0V, T _{vj} =175℃		1.58			
I _{RM}	Peak reverse recovery current	I _F =450A V _R =450V V _{GE} =-8V	T _{vj} =25℃		210		A
			T _{vj} =150℃		245		
			T _{vj} =175℃		255		
Q _r	Recovered charge		T _{vj} =25℃		19		μC
			T _{vj} =150℃		36		μC
			T _{vj} =175℃		41		μC
E _{rec}	Reverse recovery energy		T _{vj} =25℃		6		mJ
			T _{vj} =150℃		10		mJ
			T _{vj} =175℃		11		mJ

● **NTC-Thermistor**

Symbol	Parameter	Conditions	Value			Unit
			Min.	Typ.	Max.	
R_{25}	Rated resistance	$T_C=25^{\circ}C$		5.0		K Ω
$\Delta R/R$	Deviation of R100	$T_C=100^{\circ}C, R_{100}=493$	-5		5	%
P_{25}	Power dissipation	$T_C=25^{\circ}C$			20.0	mW
$B_{25/50}$	B-value	$R_2=R_{25} \exp[B_{25/50}(1/T_2-1/(298.15K))]$		3375		K
$B_{25/80}$	B-value	$R_2=R_{25} \exp[B_{25/80}(1/T_2-1/(298.15K))]$		3411		K
$B_{25/100}$	B-value	$R_2=R_{25} \exp[B_{25/100}(1/T_2-1/(298.15K))]$		3433		K

**BGW600F08B14L6-DL**● **Module**

Symbol	Parameter	Conditions	Value			Unit
			Min.	Typ.	Max.	
$T_{vj\ max}$	Maximum junction temperature				175	°C
T_{vjop}	Temperature under switching conditions	T_{op} continuous	-40		150	°C
		For 10s within a period of 30s, occurrence maximum 3000 times over lifetime	150		175	
T_{stg}	Storage temperature	Storage Temperature Range	-40		125	°C
V_{ISOL}	Isolation test voltage	RMS, $f=50\text{Hz}$, $t=30\text{s}$	3800			V
Δp	Press drop in cooling circuit	$\Delta V/\Delta t=10.0\ \text{dm}^3/\text{min}$; $T_F=65^\circ\text{C}$		77		mbar
p	Maximum drop in cooling circuit (relative)	$T_{baseplate}<40^\circ\text{C}$ $T_{baseplate}>40^\circ\text{C}$			2.5 2.0	bar
L_{sCE}	Stray inductance module			8.5		nH
$R_{CC+EE'}$	Module lead resistance terminal to chip	$T_{vj}=25^\circ\text{C}$, per switch		0.75		mΩ
$R_{thjF\ IGBT}$	thermal resistance, junction to cooling fluid	per IGBT, $\Delta V/\Delta t=10.0\ \text{dm}^3/\text{min}$; $T_F=65^\circ\text{C}$		0.1535		K/W
$R_{thjF\ Diode}$	thermal resistance, junction to cooling fluid	per diode, $\Delta V/\Delta t=10.0\ \text{dm}^3/\text{min}$; $T_F=65^\circ\text{C}$		0.2521		K/W
M_1	Mounting torque for module mounting	Screw M4 baseplate to heatsink Screw EJOT Delta PT WN5451 30x10 PCB to frame	1.8 0.45	2.00 0.50	2.20 0.55	N.m
M_2	Terminal connection torque	Screw M5	3		6	N.m
m	Weight			710		g
D_{pin}	Pin Hole Diameter		1.5		1.7	mm
D	Pin Diameter	Designer Pin Diameter		0.84		mm
δ	Baseplate Warpage	Warpage along the length Warpage along the width	-0.25 -0.20		0.25 0.15	mm

	Material of module baseplate		Cu+Ni	
	Internal isolation	ceramics	Al_2O_3	
d_{Creep}	Creepage distance	Terminal to heatsink	9.0	mm
		Terminal to terminal	9.0	
d_{Clear}	Clearance	Terminal to heatsink	4.5	mm
		Terminal to terminal	4.5	
$L \times W \times H$	Dimension		154.5×142.5×32	mm

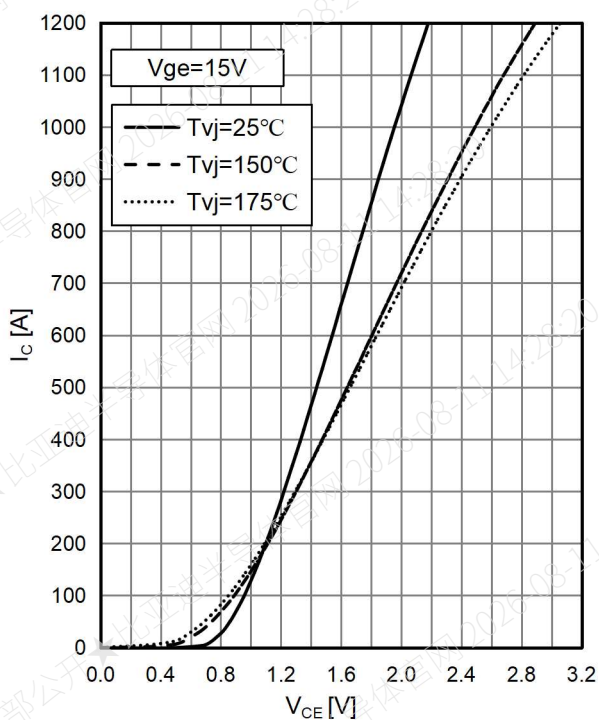
□ Characteristics Diagrams

Fig.1: IGBT Output Characteristics

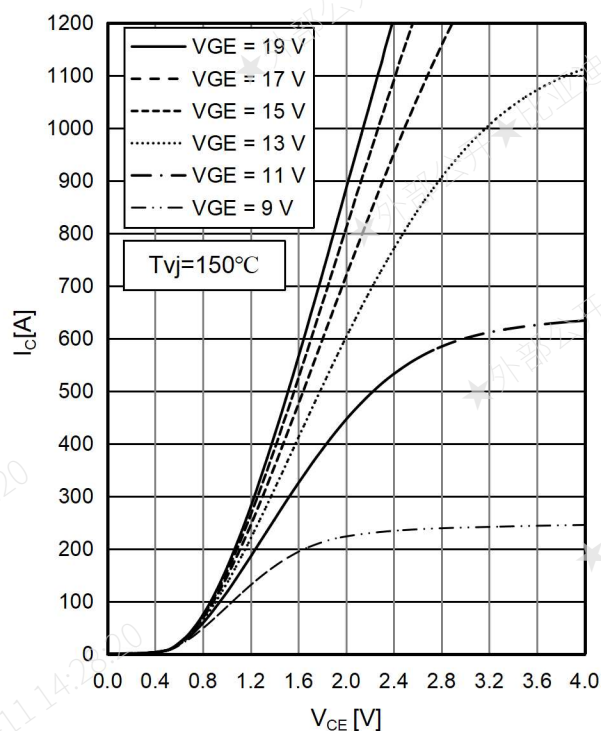


Fig.2: IGBT Output characteristics

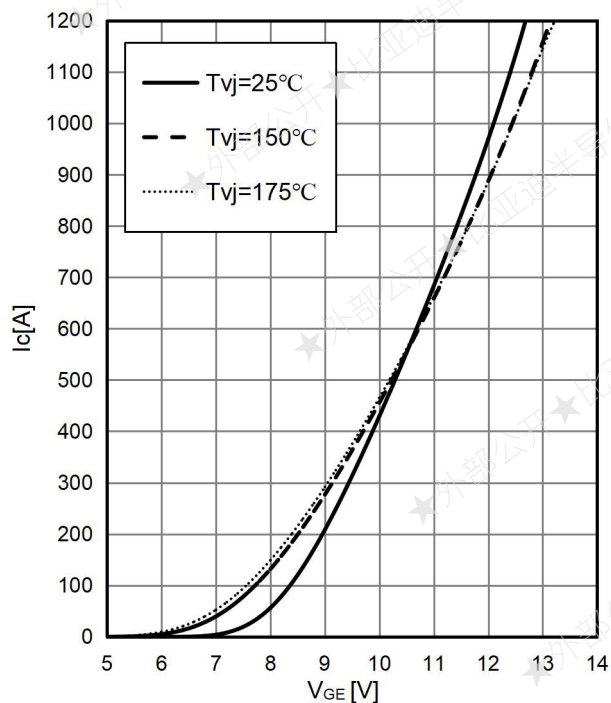
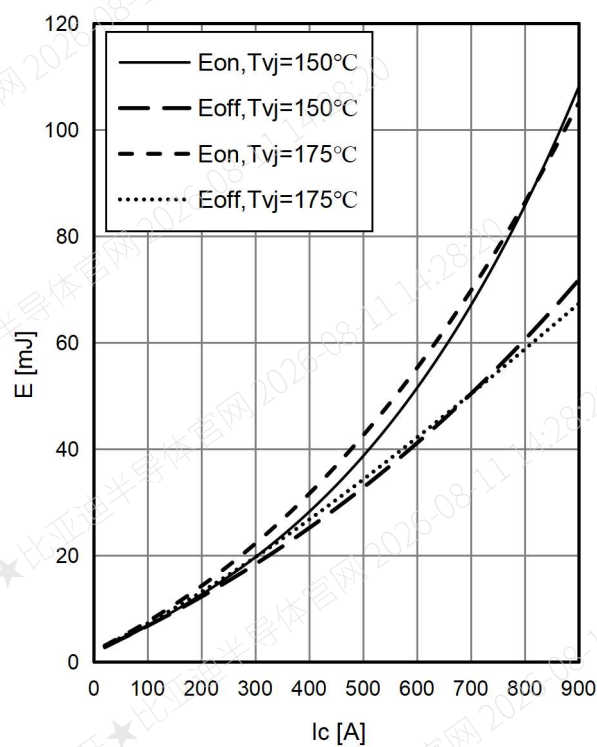


Fig.3: IGBT Transfer Characteristics

Fig.4: IGBT Switching Loss vs. I_c

BGW600F08B14L6-DL

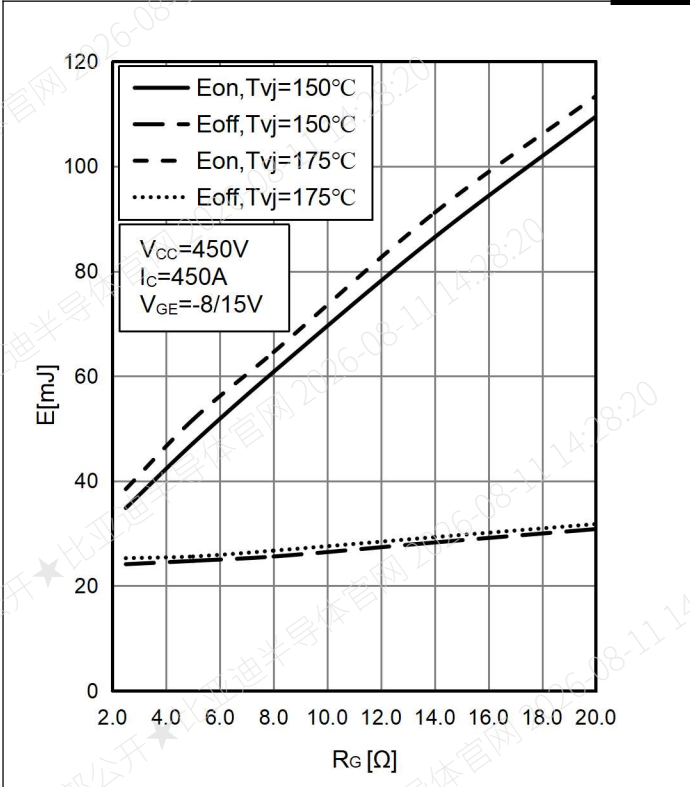


Fig.5: IGBT Switching Loss vs. R_G

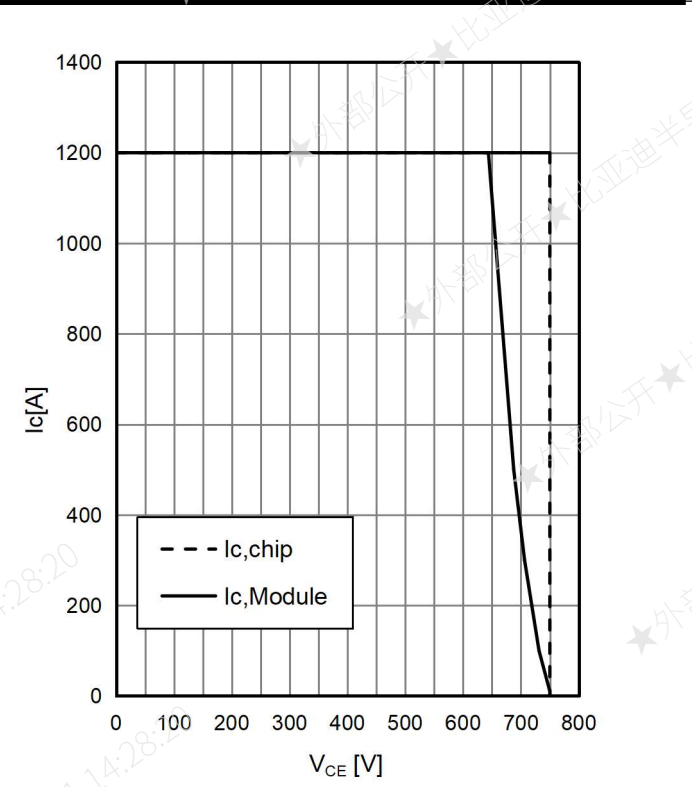


Fig.6: Reverse Bias Safe Operating Area

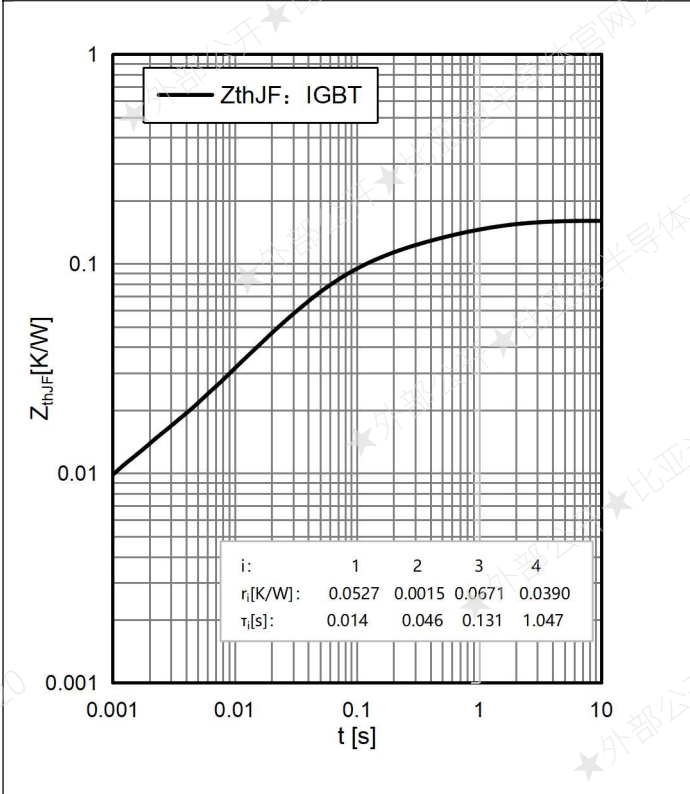


Fig.7: IGBT transient thermal impedance

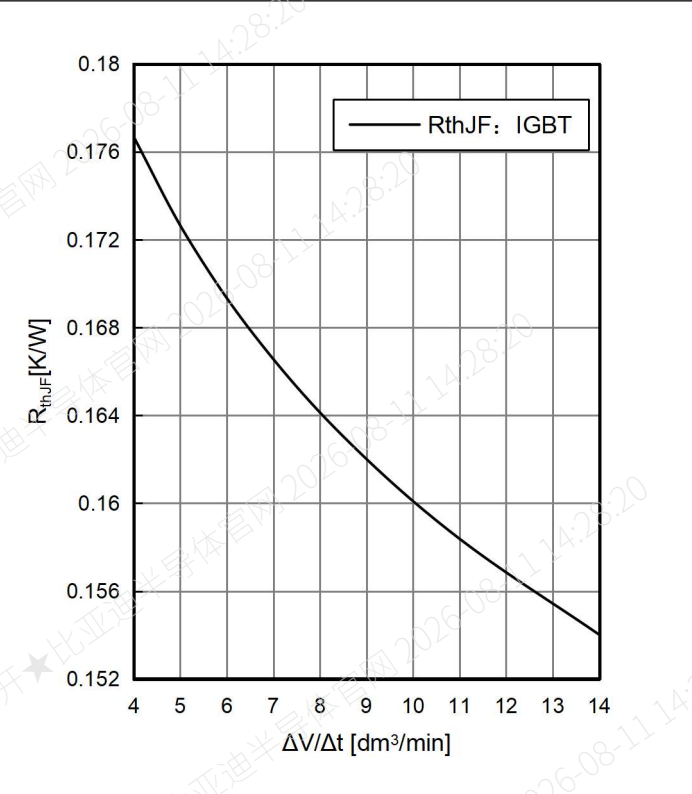


Fig.8: IGBT thermal impedance

BGW600F08B14L6-DL

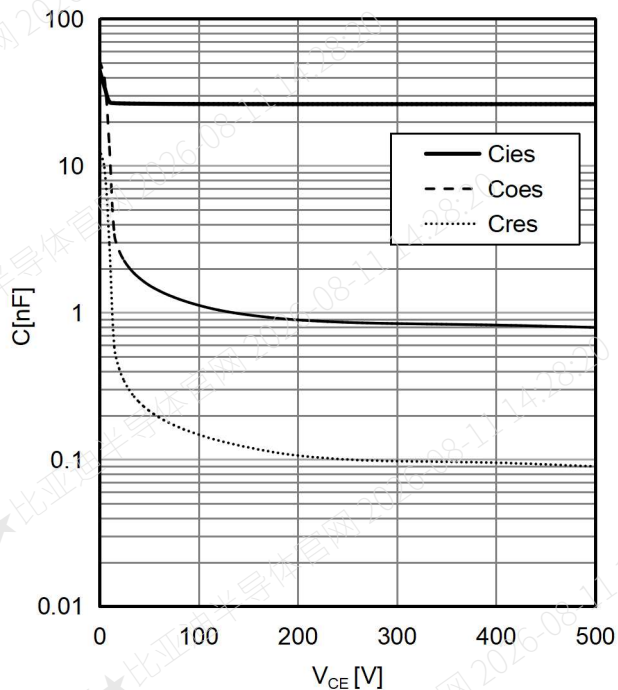


Fig.9: IGBT Capacity characteristic

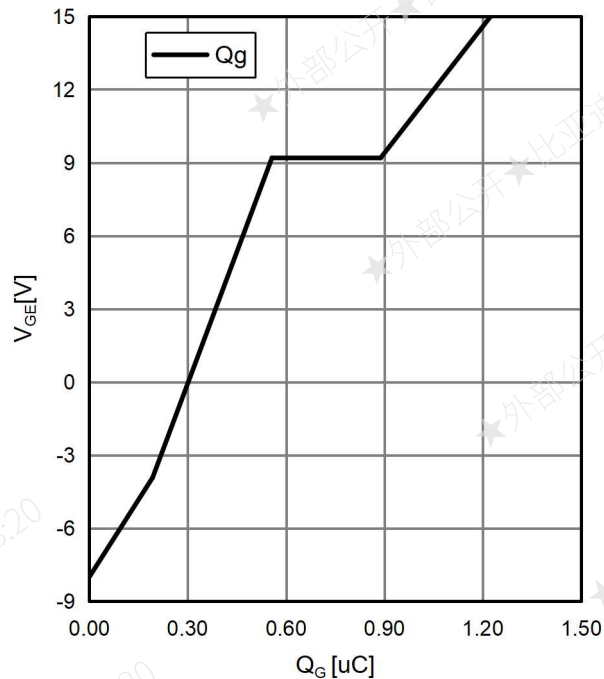


Fig.10: IGBT Gate charge characteristic

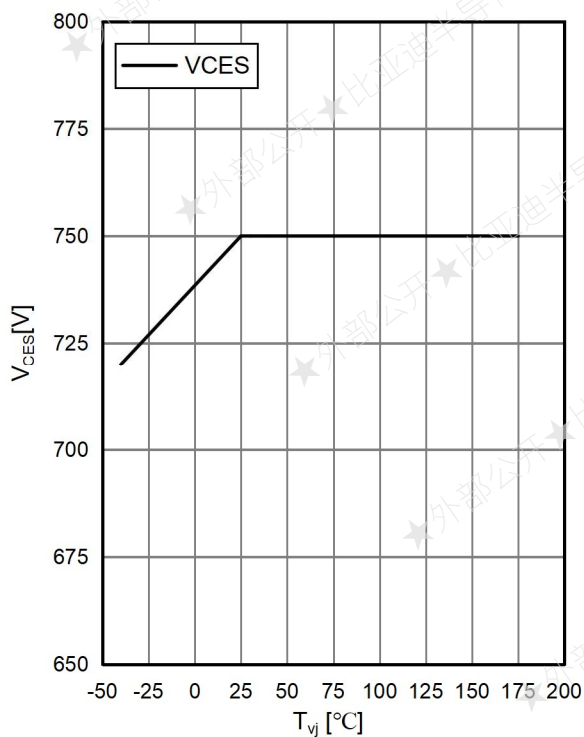


Fig.11: Maximum allowed collector-emitter voltage

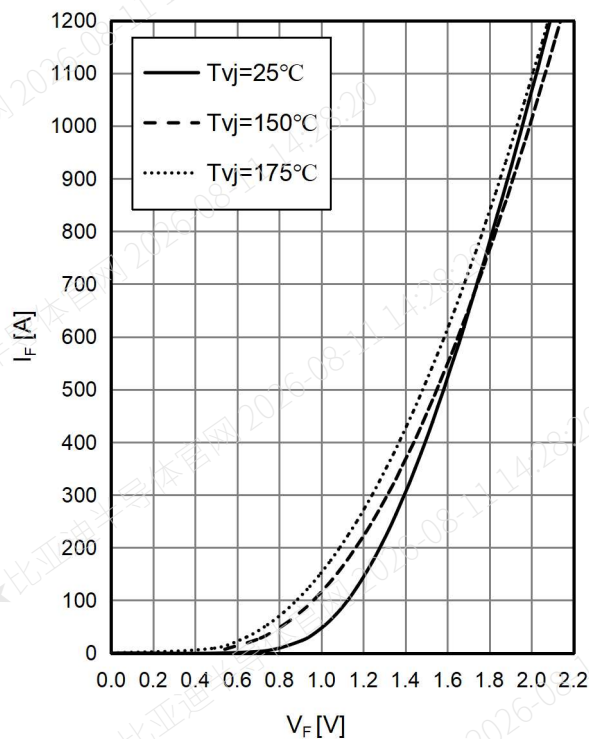


Fig.12: Diode forward characteristic

BGW600F08B14L6-DL

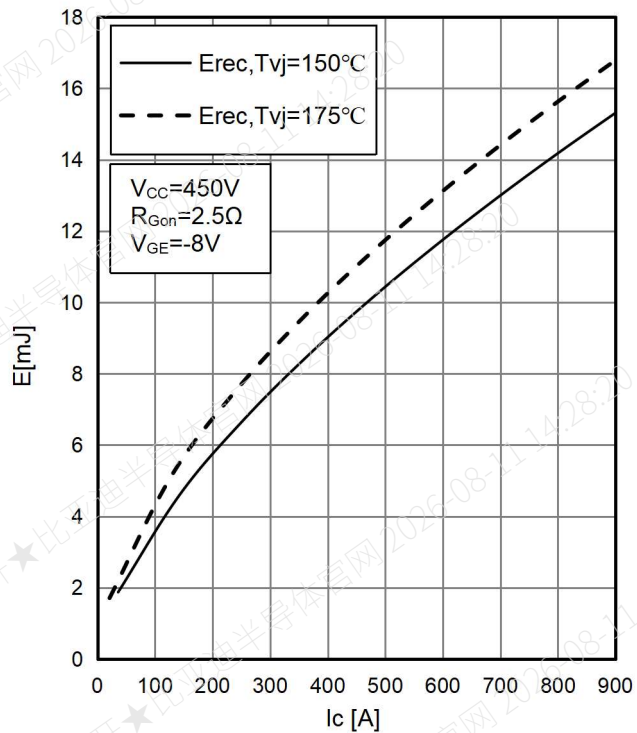
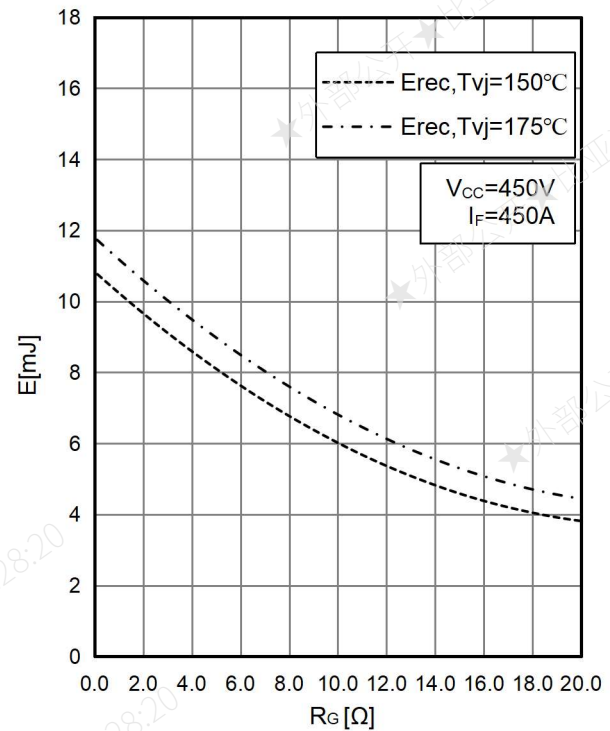
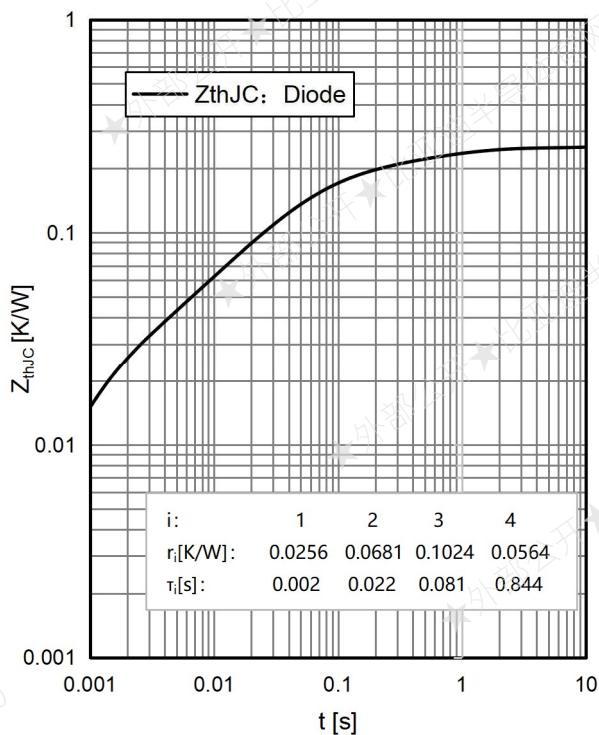
Fig.13: Diode Switching Loss vs. I_F Fig.14: Diode Switching Loss vs. R_G 

Fig.15: Diode transient thermal impedance

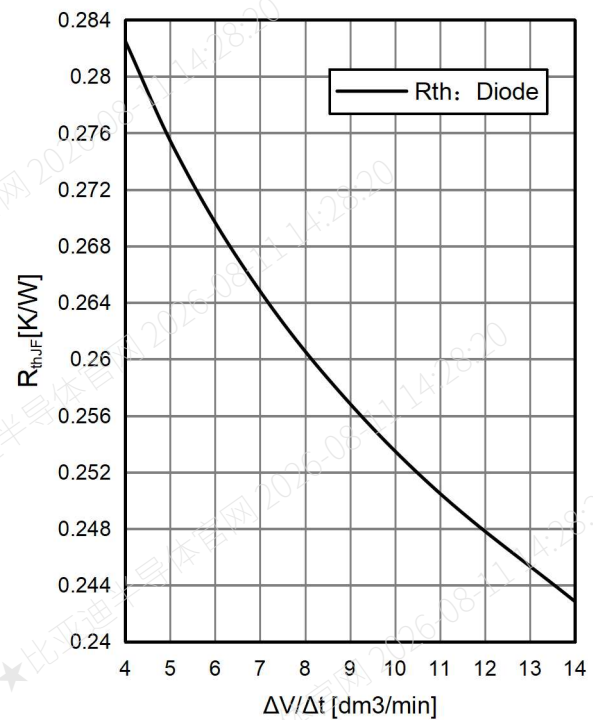


Fig.16: Diode thermal impedance

BGW600F08B14L6-DL

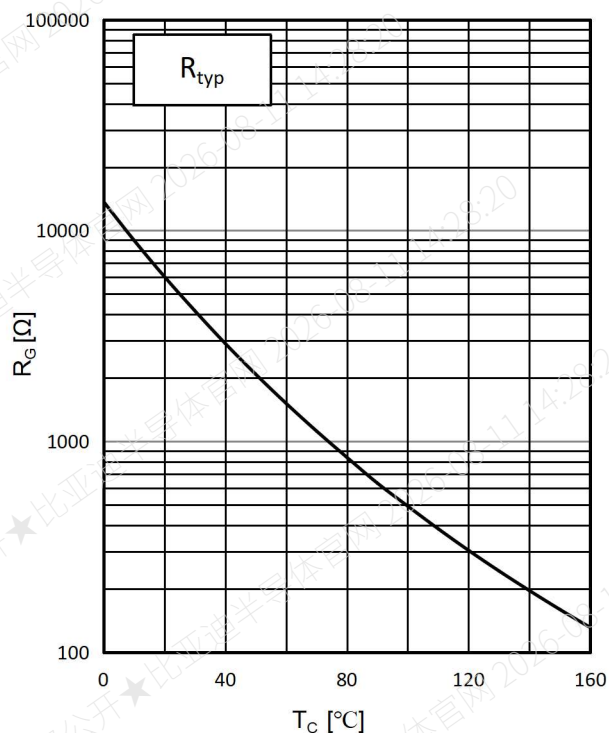


Fig.17: NTC temperature characteristic (typical)


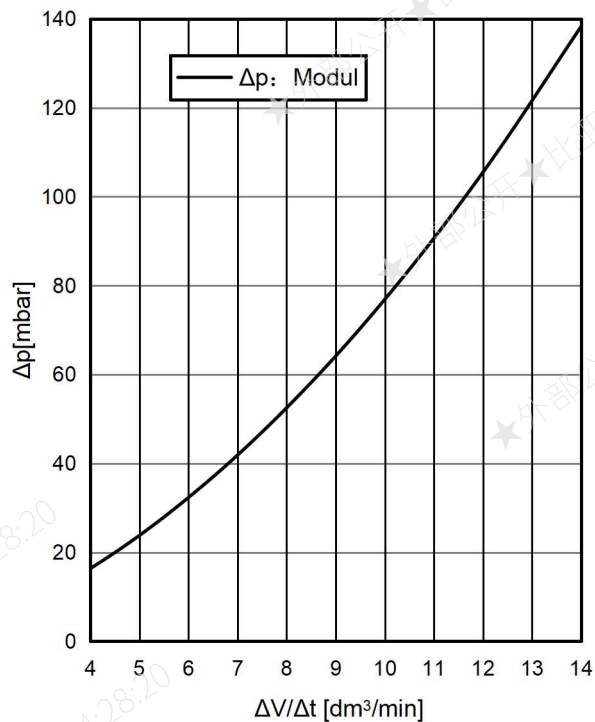


Fig.18: Pressure drop in cooling circuit

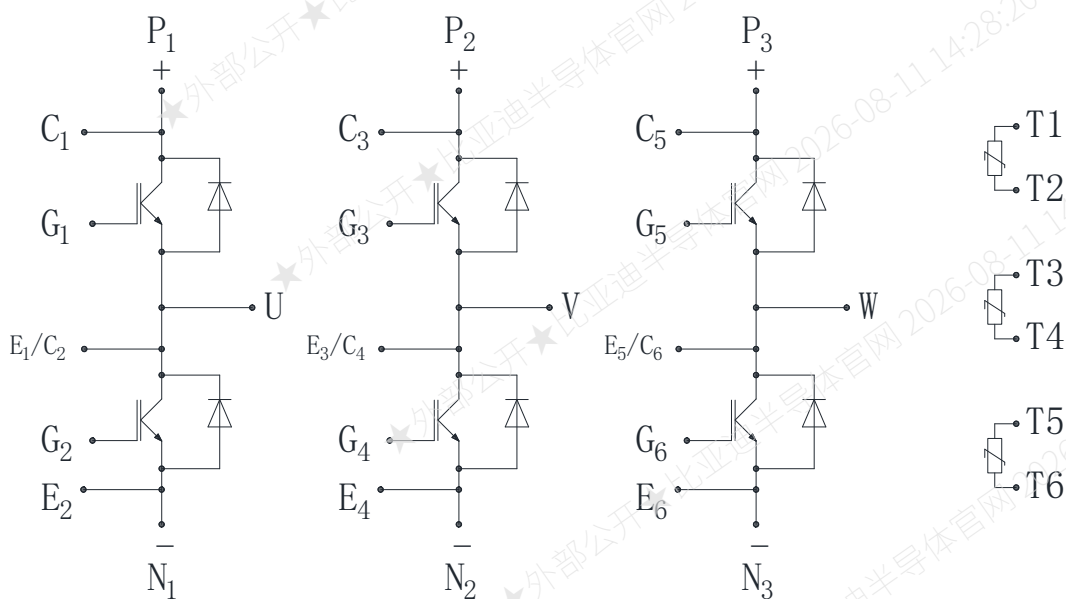□ Circuit Diagram



Technical drawing of a power MOSFET package, showing top, side, and detail views with dimensions and pin configurations.

Top View Dimensions:

- Overall width: 154.50 ± 0.40
- Overall height: 122.00
- Pin pitch: 1.00 ± 0.15 (9X)
- Pin 1 location: 1.00 ± 0.15 (9X)
- Pin 2 location: 7.60 ± 0.40
- Pin 3 location: 15.80 ± 0.20
- Pin 4 location: 26.25 ± 0.40
- Pin 5 location: 25.00 ± 0.40
- Pin 6 location: 20.00
- Pin 7 location: 5.70
- Pin 8 location: 0.00
- Pin 9 location: 13.30
- Pin 10 location: 27.33
- Pin 11 location: 41.30
- Pin 12 location: 60.30
- Pin 13 location: 74.67
- Pin 14 location: 88.30
- Pin 15 location: 107.30
- Pin 16 location: 122.00
- Pin 17 location: 127.00 ± 0.40
- Pin 18 location: 128.25 ± 0.40
- Pin 19 location: 0.00
- Pin 20 location: 0.00
- Pin 21 location: 0.00
- Pin 22 location: 0.00
- Pin 23 location: 0.00
- Pin 24 location: 0.00
- Pin 25 location: 0.00
- Pin 26 location: 0.00
- Pin 27 location: 0.00
- Pin 28 location: 0.00
- Pin 29 location: 0.00
- Pin 30 location: 0.00
- Pin 31 location: 0.00
- Pin 32 location: 0.00
- Pin 33 location: 0.00
- Pin 34 location: 0.00
- Pin 35 location: 0.00
- Pin 36 location: 0.00
- Pin 37 location: 0.00
- Pin 38 location: 0.00
- Pin 39 location: 0.00
- Pin 40 location: 0.00
- Pin 41 location: 0.00
- Pin 42 location: 0.00
- Pin 43 location: 0.00
- Pin 44 location: 0.00
- Pin 45 location: 0.00
- Pin 46 location: 0.00
- Pin 47 location: 0.00
- Pin 48 location: 0.00
- Pin 49 location: 0.00
- Pin 50 location: 0.00
- Pin 51 location: 0.00
- Pin 52 location: 0.00
- Pin 53 location: 0.00
- Pin 54 location: 0.00
- Pin 55 location: 0.00
- Pin 56 location: 0.00
- Pin 57 location: 0.00
- Pin 58 location: 0.00
- Pin 59 location: 0.00
- Pin 60 location: 0.00
- Pin 61 location: 0.00
- Pin 62 location: 0.00
- Pin 63 location: 0.00
- Pin 64 location: 0.00
- Pin 65 location: 0.00
- Pin 66 location: 0.00
- Pin 67 location: 0.00
- Pin 68 location: 0.00
- Pin 69 location: 0.00
- Pin 70 location: 0.00
- Pin 71 location: 0.00
- Pin 72 location: 0.00
- Pin 73 location: 0.00
- Pin 74 location: 0.00
- Pin 75 location: 0.00
- Pin 76 location: 0.00
- Pin 77 location: 0.00
- Pin 78 location: 0.00
- Pin 79 location: 0.00
- Pin 80 location: 0.00
- Pin 81 location: 0.00
- Pin 82 location: 0.00
- Pin 83 location: 0.00
- Pin 84 location: 0.00
- Pin 85 location: 0.00
- Pin 86 location: 0.00
- Pin 87 location: 0.00
- Pin 88 location: 0.00
- Pin 89 location: 0.00
- Pin 90 location: 0.00
- Pin 91 location: 0.00
- Pin 92 location: 0.00
- Pin 93 location: 0.00
- Pin 94 location: 0.00
- Pin 95 location: 0.00
- Pin 96 location: 0.00
- Pin 97 location: 0.00
- Pin 98 location: 0.00
- Pin 99 location: 0.00
- Pin 100 location: 0.00
- Pin 101 location: 0.00
- Pin 102 location: 0.00
- Pin 103 location: 0.00
- Pin 104 location: 0.00
- Pin 105 location: 0.00
- Pin 106 location: 0.00
- Pin 107 location: 0.00
- Pin 108 location: 0.00
- Pin 109 location: 0.00
- Pin 110 location: 0.00
- Pin 111 location: 0.00
- Pin 112 location: 0.00
- Pin 113 location: 0.00
- Pin 114 location: 0.00
- Pin 115 location: 0.00
- Pin 116 location: 0.00
- Pin 117 location: 0.00
- Pin 118 location: 0.00
- Pin 119 location: 0.00
- Pin 120 location: 0.00
- Pin 121 location: 0.00
- Pin 122 location: 0.00
- Pin 123 location: 0.00
- Pin 124 location: 0.00
- Pin 125 location: 0.00
- Pin 126 location: 0.00
- Pin 127 location: 0.00
- Pin 128 location: 0.00
- Pin 129 location: 0.00
- Pin 130 location: 0.00
- Pin 131 location: 0.00
- Pin 132 location: 0.00
- Pin 133 location: 0.00
- Pin 134 location: 0.00
- Pin 135 location: 0.00
- Pin 136 location: 0.00
- Pin 137 location: 0.00
- Pin 138 location: 0.00
- Pin 139 location: 0.00
- Pin 140 location: 0.00
- Pin 141 location: 0.00
- Pin 142 location: 0.00
- Pin 143 location: 0.00
- Pin 144 location: 0.00
- Pin 145 location: 0.00
- Pin 146 location: 0.00
- Pin 147 location: 0.00
- Pin 148 location: 0.00
- Pin 149 location: 0.00
- Pin 150 location: 0.00
- Pin 151 location: 0.00
- Pin 152 location: 0.00
- Pin 153 location: 0.00
- Pin 154 location: 0.00
- Pin 155 location: 0.00
- Pin 156 location: 0.00
- Pin 157 location: 0.00
- Pin 158 location: 0.00
- Pin 159 location: 0.00
- Pin 160 location: 0.00
- Pin 161 location: 0.00
- Pin 162 location: 0.00
- Pin 163 location: 0.00
- Pin 164 location: 0.00
- Pin 165 location: 0.00
- Pin 166 location: 0.00
- Pin 167 location: 0.00
- Pin 168 location: 0.00
- Pin 169 location: 0.00
- Pin 170 location: 0.00
- Pin 171 location: 0.00
- Pin 172 location: 0.00
- Pin 173 location: 0.00
- Pin 174 location: 0.00
- Pin 175 location: 0.00
- Pin 176 location: 0.00
- Pin 177 location: 0.00
- Pin 178 location: 0.00
- Pin 179 location: 0.00
- Pin 180 location: 0.00
- Pin 181 location: 0.00
-



**BGW600F08B14L6-DL****DISCLAIMER**

- **Application:** This product is suitable for general vehicle-grade electrical applications.
- **Warranty Period:** Unless otherwise agreed in the COOPERATION AGREEMENT or other WRITTEN DOCUMENTS, the Warranty Period for the product described in this specification is 12 months from the date of shipment.
- **Special Notes Related to the Product :**
 - **Transit:**
 - 1) The tossing or dropping of a carton may lead to damage of the devices contained within.
 - 2) If device comes into contact with water, it may result in malfunction or failure. Special precautions should be taken during rainy or snowy conditions to prevent the devices from becoming wet.
 - **Storage:**

The storage environment for the devices should maintain a temperature range of 5~35℃ and a humidity level of 30~75%RH. Storing the devices in an environment that falls outside of these specified ranges may jeopardize their performance and reliability.
 - **Usage:**
 - 1) Please install IGBT modules which potting with silicone properly with the pins up. Unsuitable operation (such as electrical, mechanical stress and so on) may lead to damage of power modules.
 - 2) Devices should not be exposed to water, organic solvents, corrosive gases, explosive gases, fine particles, or corrosive agents, since any of those can lead to a serious accident.
 - 3) Anti-static Measures: To prevent static electricity accumulation that could damage the gate devices, the following precautions should be taken: The signal terminals should always be shorted to the emitter with conductive foam or other materials until the module is about to be used, at which point they should be removed. Never touch the signal terminals with bare hands. During installation (after removing the conductive foam or other materials), ensure that the equipment and your body are grounded. It is recommended to cover the workbench and the surrounding floor with conductive pads and ground them. Use a grounded soldering iron tip.
- Our company is committed to enhancing product quality and stability. This specification serves solely to delineate technical product details.
- **Notwithstanding the Company's reasonable efforts and due diligence, the sensitive nature of the products and variations in testing environments and systems may result in a certain failure rate, including potential malfunctions or failures under specific conditions. Consequently, the Company does not warrant the accuracy of the information contained in the specifications, nor the fitness for a particular purpose or merchantability of the products. The information in the specifications shall not be construed as a guarantee or commitment regarding product functionality, condition, or quality.**
- The content contained in this specification shall not be construed as any express, implied, or otherwise grant and/or license to patents, trademarks, copyrights, or other intellectual property rights owned by the Company or third parties. The Company's commitments regarding product intellectual property are strictly limited to the terms expressly stated in SEPARATE WRITTEN AGREEMENTS with Customers. Reverse-engineering, disassembly, or any form of analysis of the product is strictly prohibited without the Company's prior written consent.
- The Company shall not be held liable for any product damage or consequential incidents resulting from usage beyond the recommended storage conditions, operating parameters, or absolute maximum ratings (or other explicitly stated limits) specified in this specification. Customers must strictly adhere to the operational procedures and conditions outlined in the latest version of the specification when utilizing or testing the product. Customers are responsible for complying with safety standards, including but not limited to redundant design, fire prevention measures, and fault prevention, to design and maintain a safe and stable system environment. Customers must verify all functionalities described in the specifications before or during actual application to ensure product suitability, safety (preventing potential accidents, fires, or public harm etc.), and reliability. It is recommended that Customers consult our company prior to

**BGW600F08B14L6-DL**

testing to confirm whether the product information adequately covers the application requirements.

- This product shall not be used in any equipment requiring higher reliability or quality standards where failure could result in personal injury, death, or catastrophic events, including but not limited to nuclear control systems, aircraft/aviation components, maritime/rail transport equipment, traffic signaling devices, combustion control systems, medical equipment, or other safety-critical applications. Customers must procure genuine products exclusively through the Company or authorized channels, and utilize them strictly within legally permitted boundaries and under conditions expressly defined in this specification. The Company disclaims all liability for losses, damages, or injuries arising from non-compliance with these requirements.
- The information presented in this specification constitutes the latest product details compiled and recorded by the Company with reasonable efforts at the time of publication. To ensure greater accuracy, the Company reserves the right to make periodic corrections, modifications, and version updates to this specification without prior notice. Customers should always refer to the latest version when using or consulting this document.