



Rectifier Diode Module

VRRM 3800 to 4400V
IFAV 435A


Applications

- Bridge Circuits
- Industry converter
- Battery Supplies

Features

- International standard package
- High Surge Capability
- Simple Mounting

Circuit



Blocking Characteristics

TYPE	VRRM	VRS	Units
MD435U38BI5	3800	4000	V
MD435U40BI5	4000	4200	V
MD435U42BI5	4200	4400	V
MD435U44BI5	4400	4600	V

Maximum Ratings

Symbol	Conditions	Values	Units
IFAV	Single phase ,half wave 180° conduction Tc=100℃	435	A
IFSM	t=10ms Tvj=TvjM	12000	A
i²t	t=10ms Tvj=TvjM	720000	A²s
Visol	a.c.50HZ;r.m.s.;1min,Iiso :2mA(max)	5000	V
Tvj		-40 to 150	℃
Tstg		-40 to 125	℃
Mt	To terminals(M10)	12±15%	Nm
Ms	To heatsink(M6)	6±15%	Nm
Weight	Module (Approximately)	870	g

Thermal Characteristics

Symbol	Conditions	Values	Units
Rth(j-c)	per diode	0.073	℃/W
Rth(c-s)	per diode	0.02	℃/W

Electrical Characteristics

Symbol	Conditions	Values			Units
		Min.	Typ.	Max.	
VFM	T=25℃ IF =1200A			1.65	V
IRRM	Tvj=TvjM V=VRRM			30	mA
VFO	Tvj=TvjM			0.84	V
rF	Tvj=TvjM			0.6	mΩ

Performance Curves

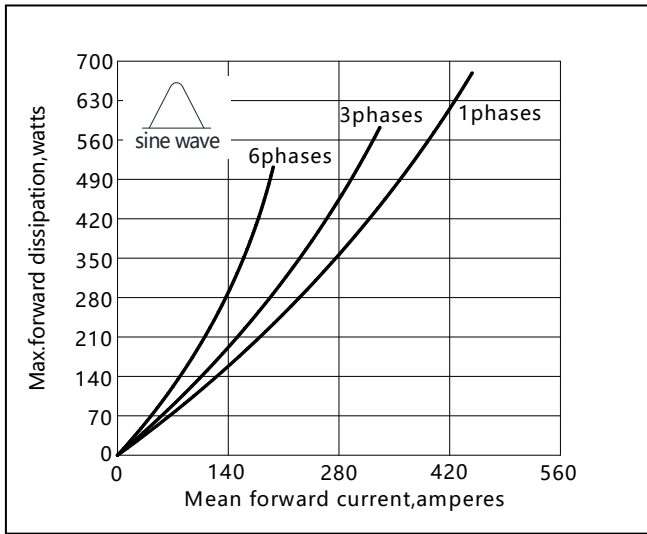


Fig1. Power dissipation

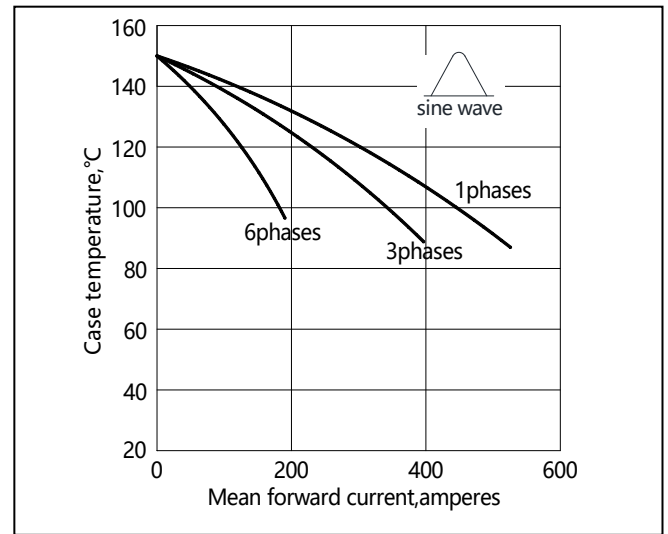


Fig2. Forward Current Derating Curve

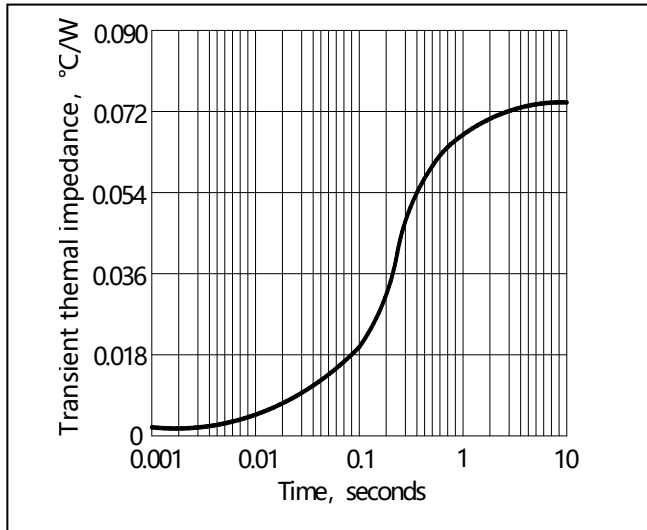


Fig3. Transient thermal impedance

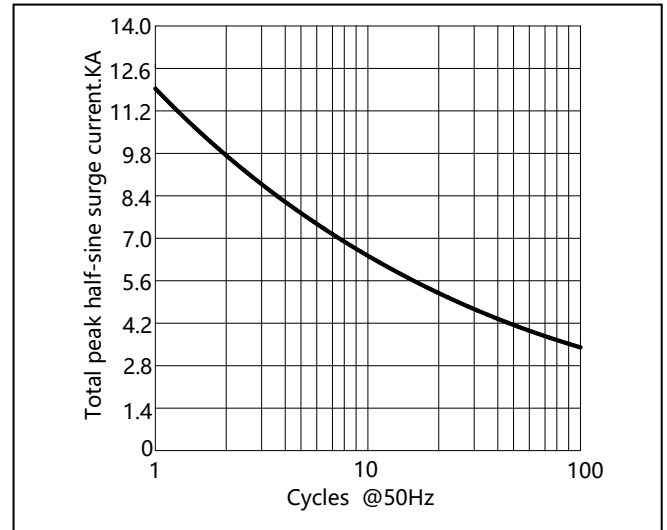


Fig4. Max Non-Repetitive Forward Surge Current


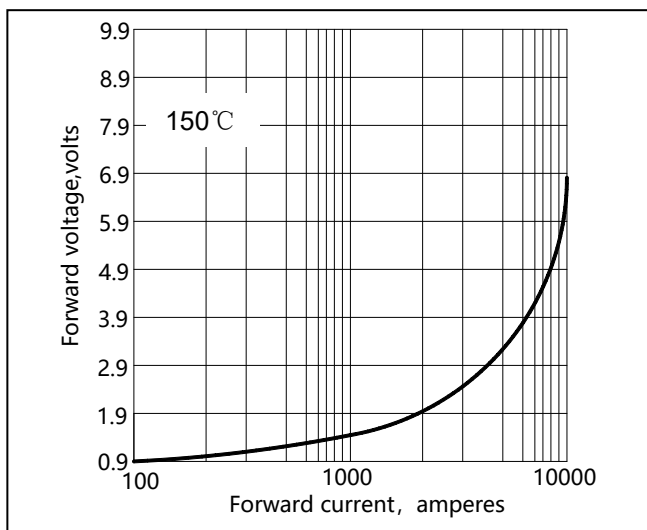


Fig5. Forward Characteristics

Package Outline Information

CASE: BI5

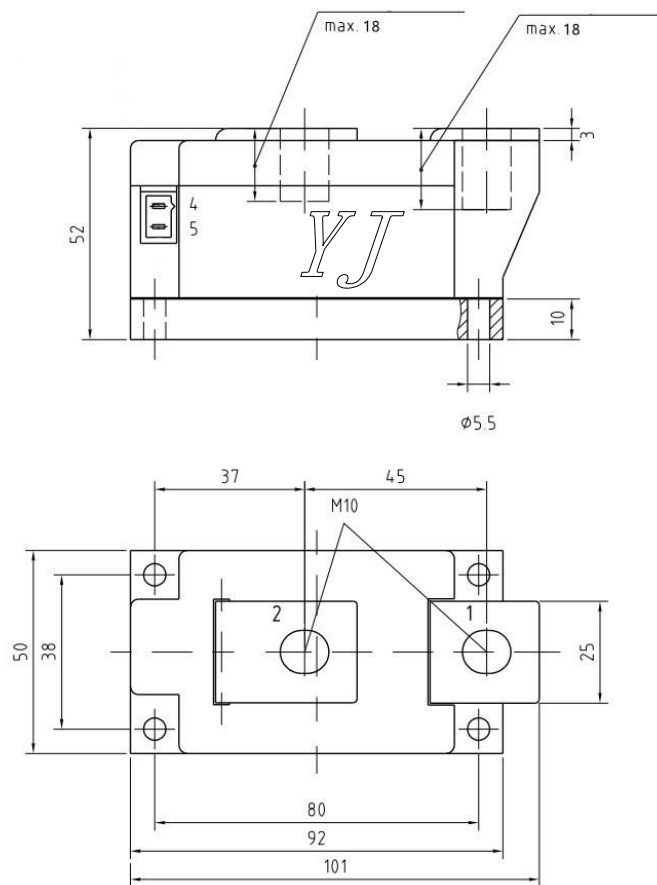

Dimensions in mm

Unmarked dimensional tolerance: $\pm 0.5\text{mm}$



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function, or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <http://www.21yangjie.com>, or consult your nearest Yangjie's sales office for further assistance.