



Rectifier Diode Module

VRRM 1200 to 2000V
IFAV 600A


Applications

- Bridge Circuits
- Industry converter
- Battery Supplies

Features

- International standard package
- High Surge Capability
- Simple Mounting

Circuit



Blocking Characteristics

TYPE	VRRM	VRSM	Units
MD600U12BI5	1200	1300	V
MD600U14BI5	1400	1500	V
MD600U16BI5	1600	1760	V
MD600U18BI5	1800	2000	V
MD600U20BI5	2000	2200	V

Maximum Ratings

Symbol	Conditions	Values	Units
IFAV	Single phase ,half wave 180° conduction Tc=100℃	600	A
IFSM	t=10ms Tvj=TvjM	15000	A
i ² t	t=10ms Tvj=TvjM	1125000	A ² s
Visol	a.c.50HZ;r.m.s.;1min,Iiso :2mA(max)	2500	V
Tvj		-40 to 150	℃
Tstg		-40 to 125	℃
Mt	To terminals(M10)	12±15%	Nm
Ms	To heatsink(M6)	6±15%	Nm
Weight	Module (Approximately)	780	g

Thermal Characteristics

Symbol	Conditions	Values	Units
Rth(j-c)	per diode	0.073	℃/W
Rth(c-s)	per diode	0.04	℃/W

Electrical Characteristics

Symbol	Conditions	Values			Units
		Min.	Typ.	Max.	
VFM	T=25℃ IF =1800A			1.35	V
IRRM	Tvj=TvjM V=VRRM			25	mA
VFO	Tvj=TvjM			0.75	V
rF	Tvj=TvjM			0.215	mΩ

Performance Curves

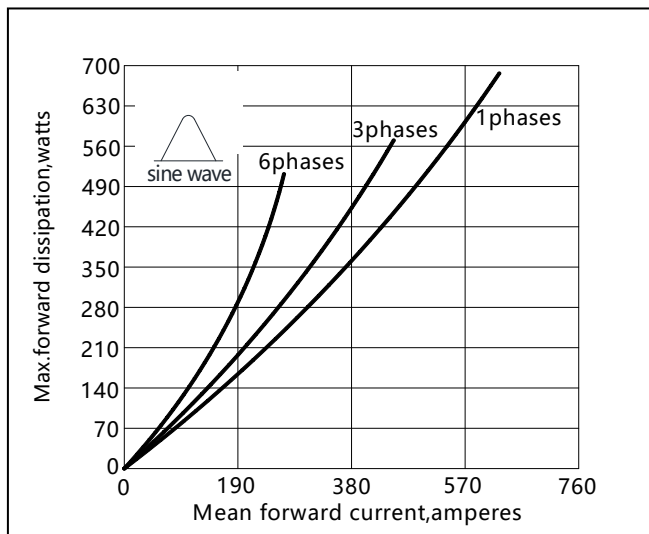


Fig1. Power dissipation

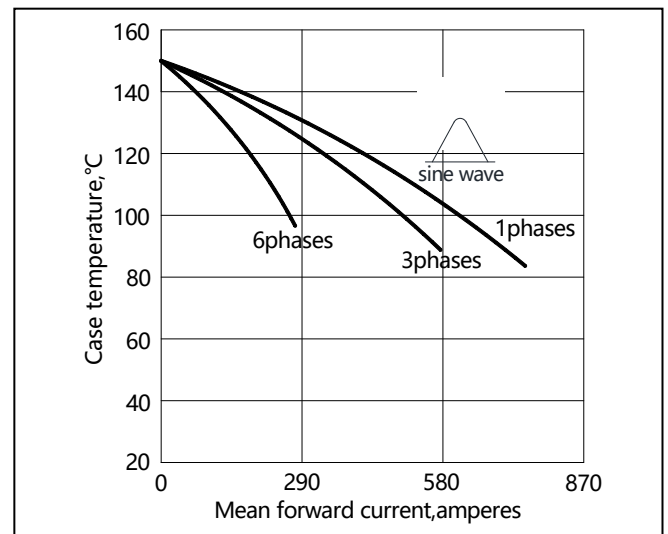


Fig2. Forward Current Derating Curve

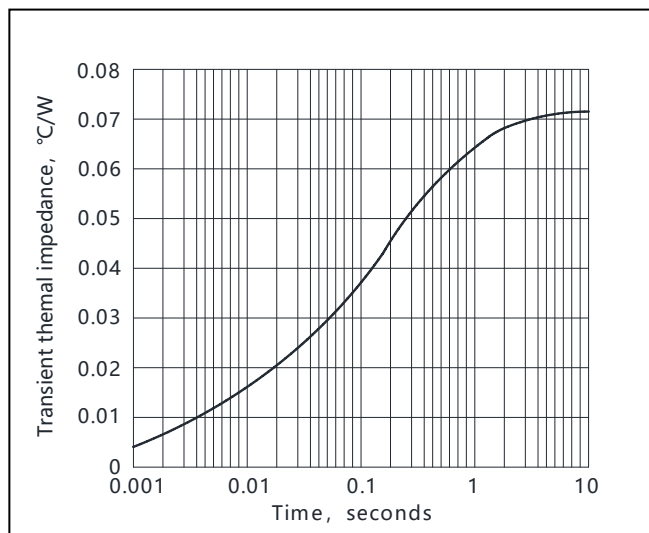


Fig3. Transient thermal impedance

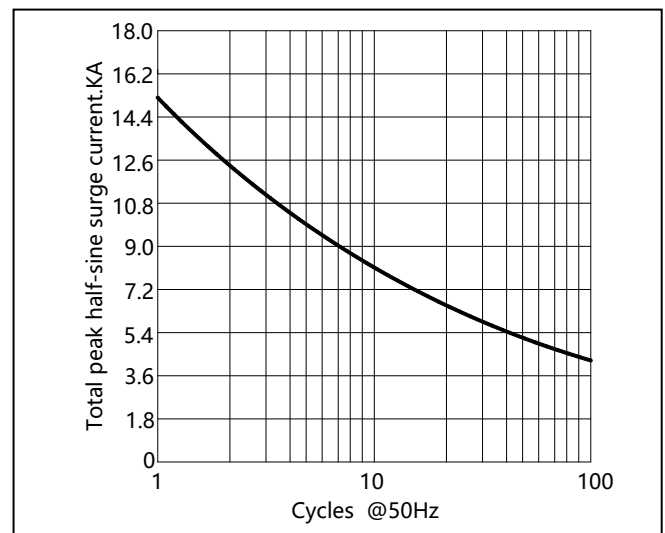


Fig4. Max Non-Repetitive Forward Surge Current


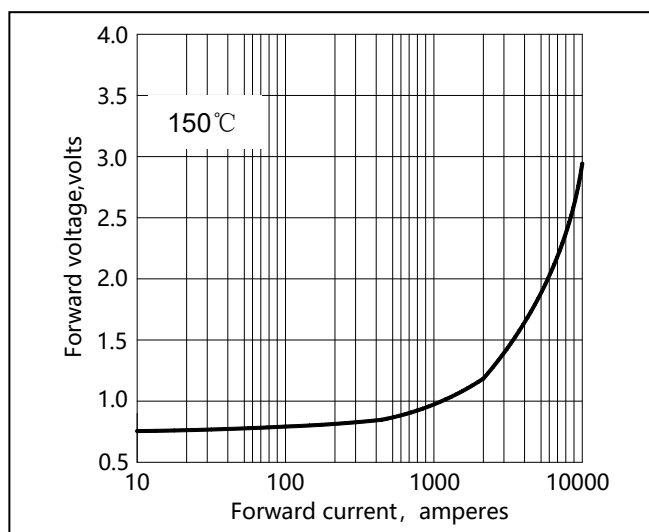


Fig5. Forward Characteristics

Package Outline Information

CASE: BI5

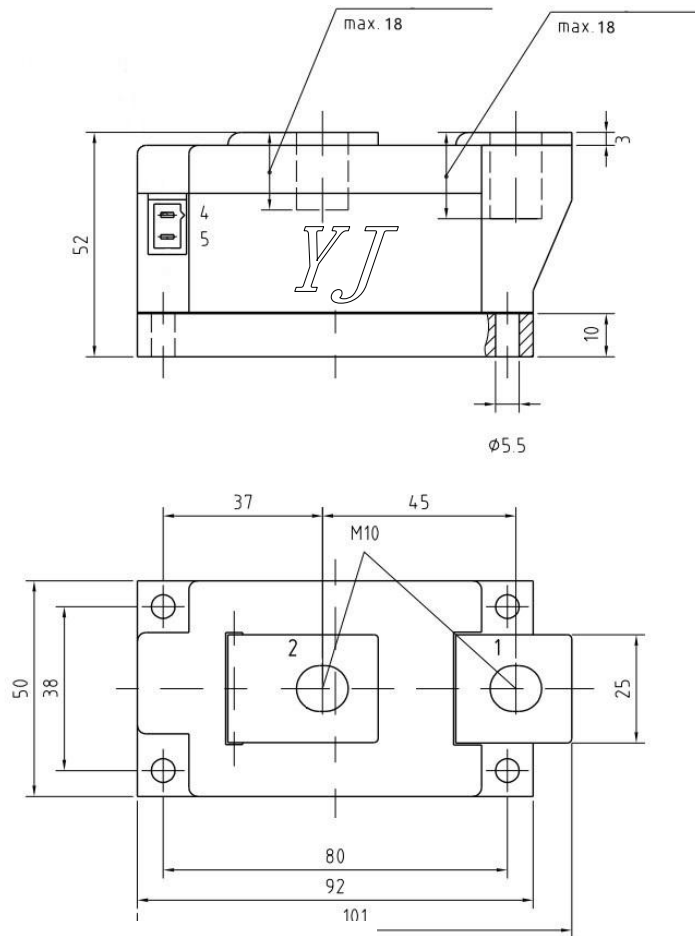

Dimensions in mm

Unmarked dimensional tolerance: $\pm 0.5\text{mm}$



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function, or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <http://www.21yangjie.com>, or consult your nearest Yangjie's sales office for further assistance.