


NPN Transistor

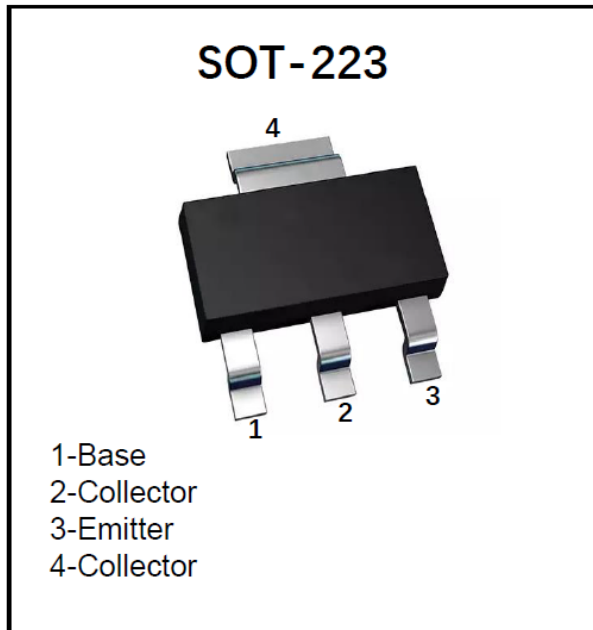

Features

- Moisture Sensitivity Level 1
- Low collector-emitter saturation voltage
- Part no. with suffix "Q" means AEC-Q101 qualified


Application

- DC/DC converters; MOSFET gate driving
- Motor control; Power switches

Mechanical Data

- **Package:** SOT-223
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Marking:** S304NZ

■Equivalent circuit

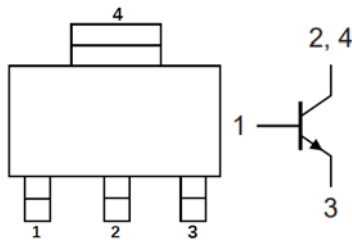

■Maximum Ratings (Ta=25°C unless otherwise noted)

Item	Symbol	Unit	Conditions	Value
Collector-Emitter Voltage	V_{CEO}	V		60
Collector-Base Voltage	V_{CBO}	V		60
Emitter-Base Voltage	V_{EBO}	V		5
Collector Current	I_C	A		5.2
Power Dissipation (Note1)	P_D	W		0.7
Power Dissipation (Note2)	P_D	W		1
Junction Temperature	T_j	°C		-55 to +150
Storage Temperature	T_{stg}	°C		-55 to +150



■ Thermal Characteristics

Parameter	Symbol	Unit	Value
Thermal resistance, junction-to-ambient	$R_{\theta J-A}^{(1)}$	$^{\circ}\text{C/W}$	179
Thermal resistance, junction-to-ambient	$R_{\theta J-A}^{(2)}$	$^{\circ}\text{C/W}$	125

Note:

- (1) Thermal resistance from junction to ambient, mounted on FR4 P.C.B. with standard footprint.
 (2) Thermal resistance from junction to ambient, mounted on FR4 P.C.B. with 1cm² copper collector pad area.

■ Electrical Characteristics (Ta=25 $^{\circ}\text{C}$ unless otherwise noted)

Item	Symbol	Unit	Conditions	Min	Typ	Max
Collector-Base Breakdown Voltage	V_{CBO}	V	$I_C=100\mu\text{A}, I_E=0$	60		
Collector-Emitter Breakdown Voltage	V_{CEO^*}	V	$I_C=10\text{mA}, I_B=0$	60		
Emitter-Base Breakdown Voltage	V_{EBO}	V	$I_E=100\mu\text{A}, I_C=0$	5		
Collector-Base Cut-Off Current	I_{CBO}	nA	$V_{CB}=60\text{V}, I_E=0$			100
Emitter-Base Cut-Off Current	I_{EBO}	nA	$V_{EB}=5\text{V}, I_C=0$			100
DC Current Gain	h_{FE}		$V_{CE}=2\text{V}, I_C=0.5\text{A}$	300		
	h_{FE}		$V_{CE}=2\text{V}, I_C=1\text{A}$	300		
	h_{FE}		$V_{CE}=2\text{V}, I_C=2\text{A}$	250		
	h_{FE}		$V_{CE}=2\text{V}, I_C=4\text{A}$	150		
	h_{FE}		$V_{CE}=2\text{V}, I_C=6\text{A}$	80		
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	mV	$I_C=0.5\text{A}, I_B=50\text{mA}$			35
			$I_C=1\text{A}, I_B=50\text{mA}$			70
			$I_C=1\text{A}, I_B=10\text{mA}$			120
			$I_C=2\text{A}, I_B=40\text{mA}$			150
			$I_C=4\text{A}, I_B=200\text{mA}$			220
			$I_C=4\text{A}, I_B=400\text{mA}$			210
			$I_C=4\text{A}, I_B=80\text{mA}$			305
			$I_C=5.2\text{A}, I_B=260\text{mA}$			280
Collector-Emitter Saturation Resistance	$R_{CE(sat)}$	m Ω	$I_C=4\text{A}, I_B=200\text{mA}$			55
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	V	$I_C=1\text{A}, I_B=100\text{mA}$			0.9
			$I_C=4\text{A}, I_B=400\text{mA}$			1.05
Base-Emitter Turn-On Voltage	$V_{BE(on)}$	V	$V_{CE}=2\text{V}, I_C=2\text{A}$			0.85
Output Capacitance	Cob	pF	$V_{CB}=10\text{V}, I_E=0, f=1\text{MHz}$		40	
Transition Frequency	f_T	MHz	$V_{CE}=10\text{V}, I_C=100\text{mA}, f=100\text{MHz}$	100		



■Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
PBSS304NZQ	F2	Approximate 0.11	2500	5000	25000	13" reel

■Characteristics (Typical)

Fig.1 - Static characteristic

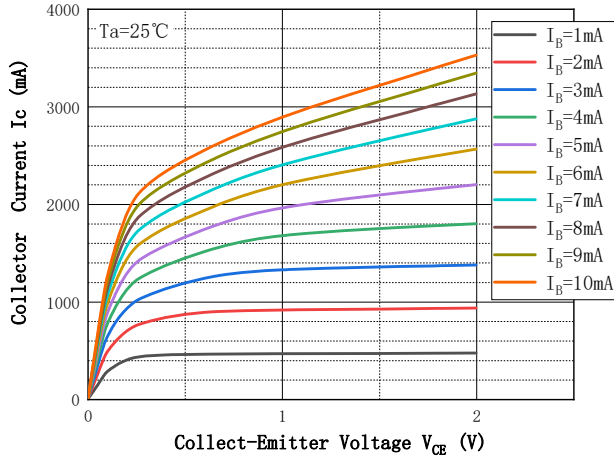


Fig.2 - DC Current Gain

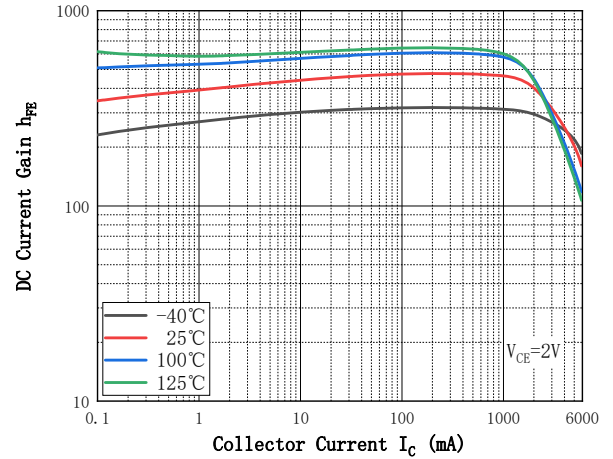


Fig.3 - Collect-Emmitter Saturation Voltage

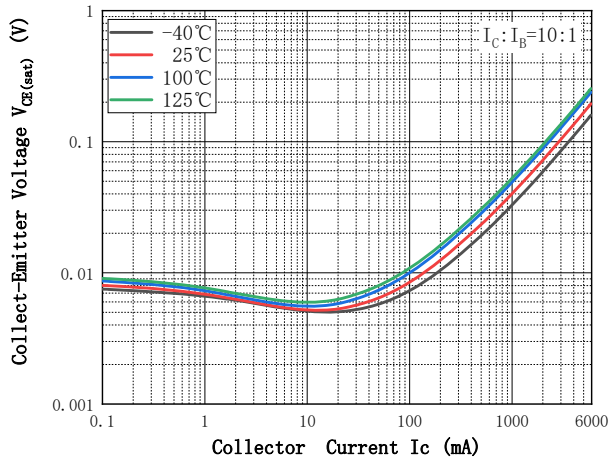


Fig.4 - Collect-Emmitter Saturation Voltage

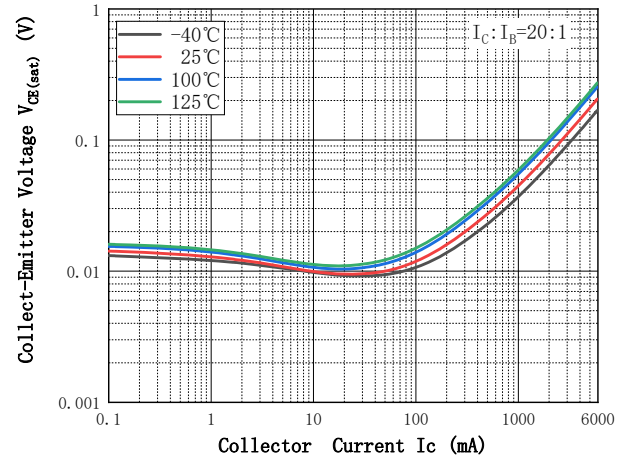


Fig.5 - Base-Emitter Voltage

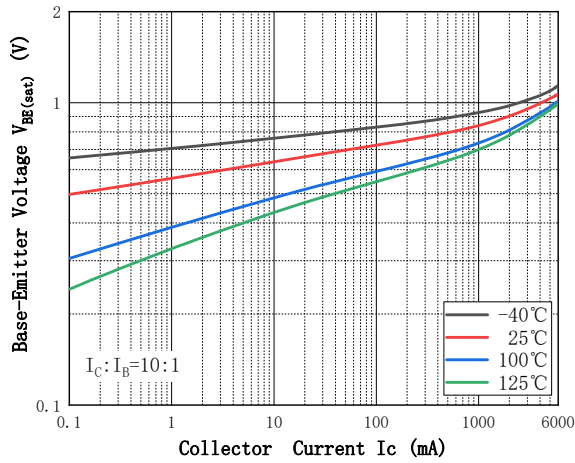


Fig.6 - Base-Emitter Voltage

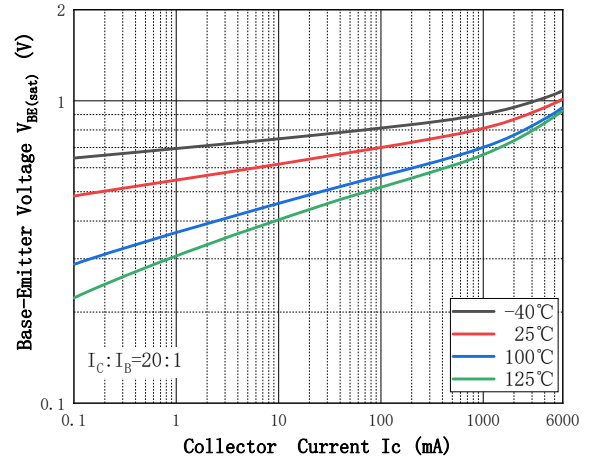


Fig.7 - Base-Emitter On Voltage

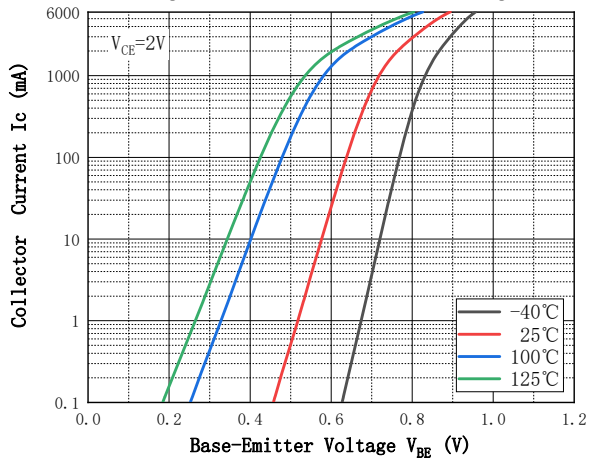


Fig.8 - Cob/Cib—VCB/VEB




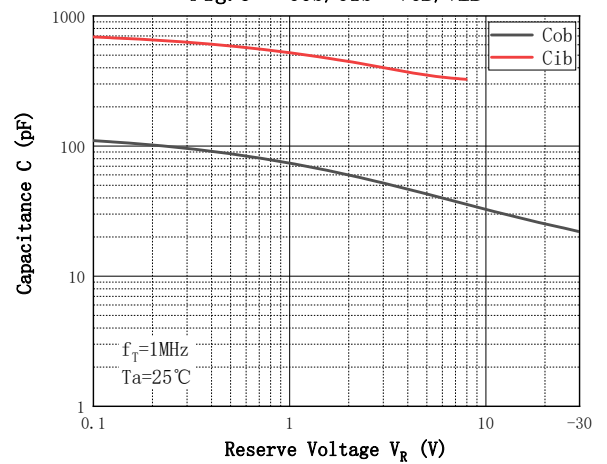


Fig.9 - Power Derating Curve

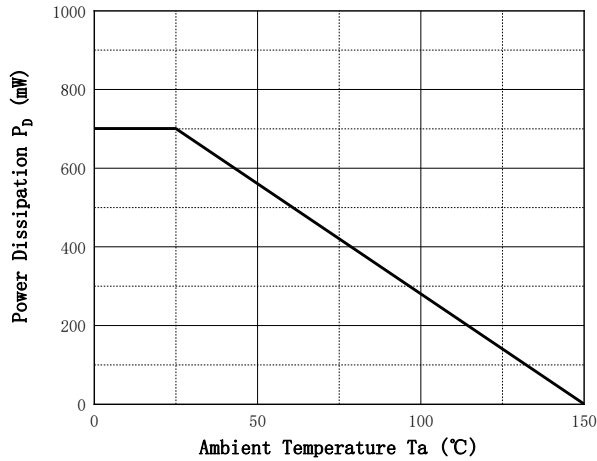




■SOT-223 Package Outline Dimensions



DIM	DIMENSIONS			
	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.0591	0.0670	1.5000	1.7000
A1	0.0008	0.0039	0.0200	0.1000
b	0.0259	0.0330	0.6600	0.8400
b1	0.1140	0.1220	2.9000	3.1000
c	0.0090	0.0138	0.2300	0.3500
D	0.2480	0.2640	6.3000	6.7000
E	0.2637	0.2874	6.7000	7.3000
E1	0.1290	0.1460	3.3000	3.7000
e	0.0866	0.0945	2.2000	2.4000
L	0.0295	0.0492	0.7500	1.2500
θ	0°	10°	0°	10°

■SOT-223 Suggested Pad Layout

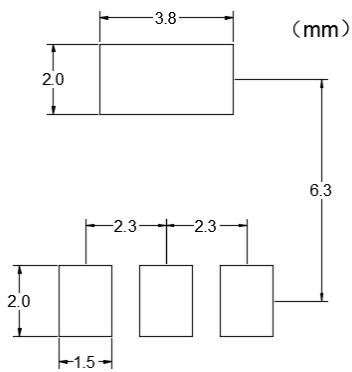



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, life-saving, life-sustaining, or military. Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.