



Schottky Rectifier Modules

V_{RRM} 100V


I_{FAV} 200 A

Applications

- Plating Power Supply
- High Frequency Power Supply
- High Current Switching Power Supply
- Reverse Battery Protection
- Welding Machine

Features

- High Frequency Operation
- Low Forward Voltage
- Dual Diode Construction; May be Paralleled for High Current Output
- Lead (Pb)-free
- Designed and qualified for industrial level

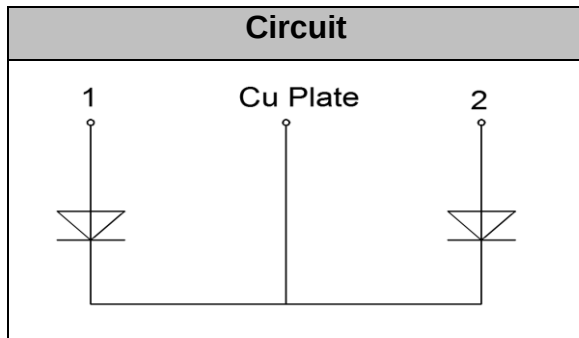

Maximum Ratings

Symbol	Conditions	Values	Units
V_R		100	V
$I_{F(AV)}$	$T_C=125^{\circ}\text{C}$, Per Diode	100	A
	$T_C=125^{\circ}\text{C}$, Per Module	200	A
I_{FSM}	1/2 Cycle , 60Hz, Sine	1500	A
I^2t	$T_J=45^{\circ}\text{C}$, $t=8.3\text{ms}$, 60Hz, Sine	11250	A^2s
T_J		-40 to +150	$^{\circ}\text{C}$
T_{STG}		-40 to +150	$^{\circ}\text{C}$
Torque	Recommended (M6)	3~4.7	N·m
Torque	Recommended (M6)	3~4.7	N·m
Weight		92	g

Thermal Characteristics




Symbol	Conditions	Values	Units
$R_{th(j-c)}$	Per diode	0.3	$^{\circ}\text{C/W}$

Electrical Characteristics

Symbol	Conditions	Values			Units
		Min.	Typ.	Max.	
I_{RM}	$V_R=100\text{V}$	--	--	1	mA
	$V_R=100\text{V}$, $T_J=125^{\circ}\text{C}$	--	--	10	mA
V_F	$I_F=100\text{A}$, $T_J=25^{\circ}\text{C}$	--	0.78	0.85	V
	$I_F=100\text{A}$, $T_J=125^{\circ}\text{C}$	--	0.66	0.75	




Performance Curves

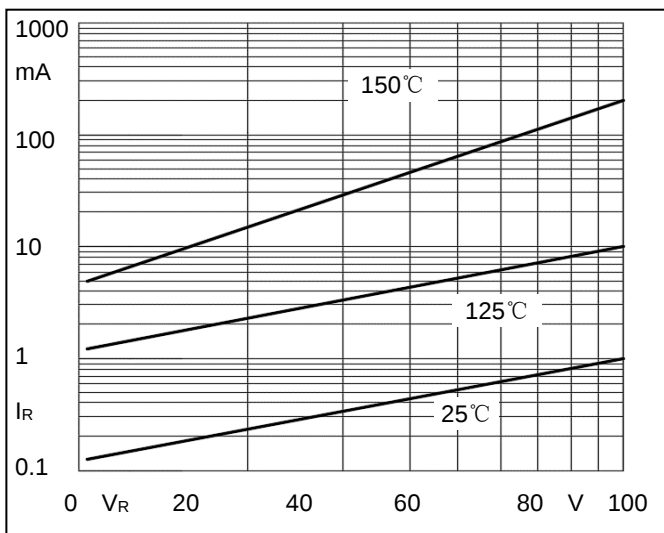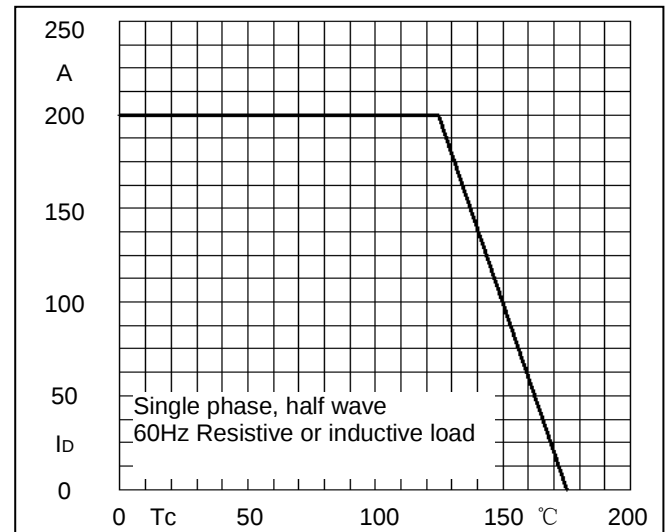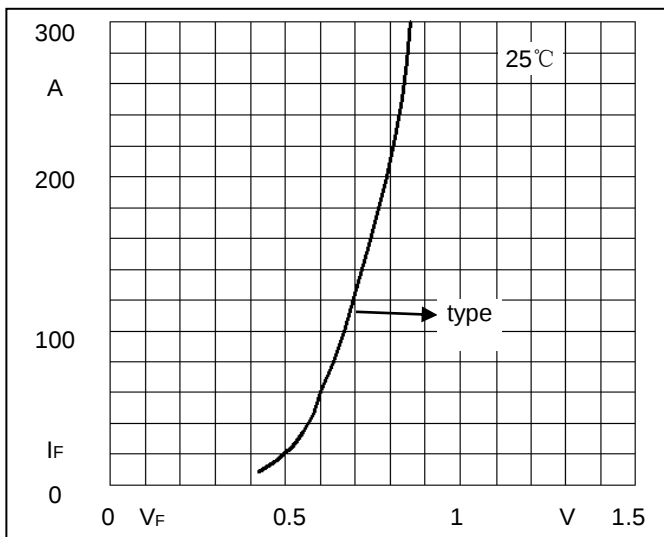

Package Outline Information

CASE: F3

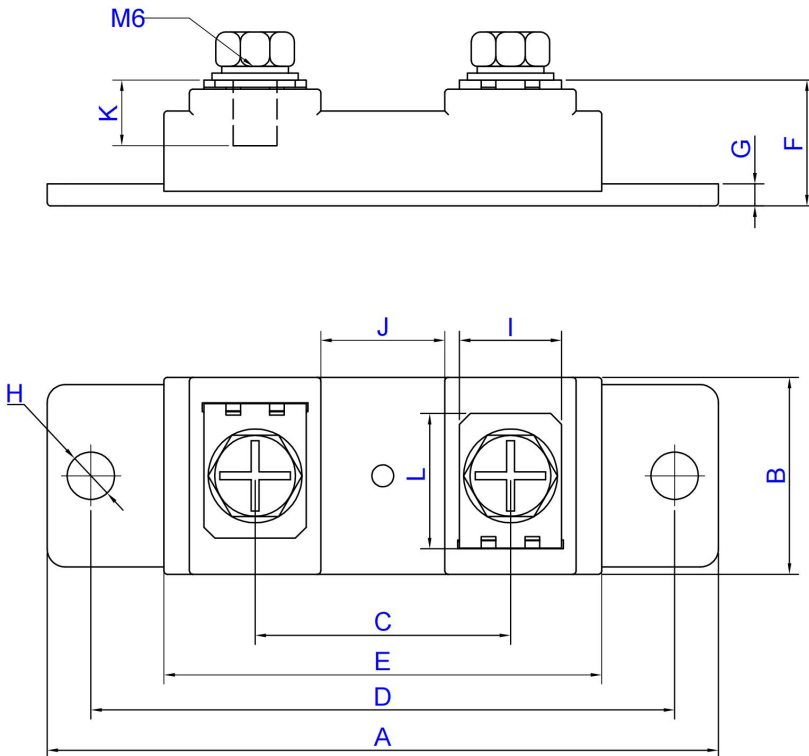

DIM	Min (mm)	Max (mm)	Note
A	91.5	92.5	
B	26.5	27.5	
C	34.5	35.5	
D	79.5	80.5	
E	59.5	60.5	
F	16.5	17.5	
G	2.8	3.2	
H	6.2	6.8	Ø
I	13.8	14.2	
J	16.5	17.5	
K	8.5	9.5	
L	18.2	18.8	

Packing Standard

Item	Length: A (mm)	Width: B (mm)	Height: C (mm)	Quantity (PCS)
Inner Box	276	258	40	10
Outer Carton	545	295	240	120



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, life-saving, lifesustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <http://www.21yangjie.com>, or consult your nearest Yangjie's sales office for further assistance.