



关键参数		Key Parameters		电路结构	Circuit Configuration
V_R		1200	V		
V_F	Typ.	1.37	V		
I_F	Max.	30	A		
典型应用		Typical Application		器件外形	Device Appearance
● 光伏逆变器		Solar Inverters			
● 开关电源		Switching Mode Power Supply			
● 充电桩		Battery Chargers			
● 不间断电源		UPS			
特点		Features		图 2. 模块外形 Fig. 2 Device appearance	
● 零反向恢复电流		No Reverse Recovery Current			
● 温度依赖性低		Reduced Temperature Dependence			
● 高效率		Higher Efficiency			
● 易并联使用		Easy Paralleling			

最大额定值			Maximum Ratings	
符号 Symbol	参数名称 Parameter	测试条件 Test Conditions	数值 Value	单位 Unit
V_{RRM}	反向重复峰值电压 Repetitive peak reverse voltage		1200	V
I_F	正向持续直流电流, 由 $T_{vj\max}$ 限制 Continuous forward current, limited by $T_{vj\max}$	$T_C = 25\text{ }^{\circ}\text{C}, T_{vj\max}=175\text{ }^{\circ}\text{C}$	30	A
I_{FRM}	正向重复峰值电流, 由 $T_{vj\max}$ 限制 Maximum repetitive forward current, limited by $T_{vj\max}$	$T_C = 25\text{ }^{\circ}\text{C}, t_P = 10\text{ms}$	120	A
		$T_C = 100\text{ }^{\circ}\text{C}, t_P = 10\text{ms}$	60	A
I_{FSM}	正向不重复浪涌电流 Non-Repetitive peak forward surge current	$T_C = 25\text{ }^{\circ}\text{C}, t_P = 10\text{ms}$, 正弦半波 $T_C = 25\text{ }^{\circ}\text{C}, t_P = 10\text{ms}$, Half Sine Pulse	313	A
		$T_C = 150\text{ }^{\circ}\text{C}, t_P = 10\text{ms}$, 正弦半波 $T_C = 150\text{ }^{\circ}\text{C}, t_P = 10\text{ms}$, Half Sine Pulse	277	A
I^2t	I^2t 值 I^2t value	$T_C = 25\text{ }^{\circ}\text{C}, t_P = 10\text{ms}$, 正弦半波 $T_C = 25\text{ }^{\circ}\text{C}, t_P = 10\text{ms}$, Half Sine Pulse	490	A^2s

R_t	R_t 值 R_t value	$T_C = 150\text{ }^{\circ}\text{C}$, $t_P = 10\text{ms}$, 正弦半波 $T_C = 150\text{ }^{\circ}\text{C}$, $t_P = 10\text{ms}$, Half Sine Pulse	384	A^2s
$T_{vj\text{ max}}$	最大允许结温 Max. Junction temperature		175	$^{\circ}\text{C}$
$T_{vj(\text{op})}$	工作结温 Operation junction temperature		-55...+175	$^{\circ}\text{C}$
T_{stg}	存储温度 Storage temperature range		-55...+150	$^{\circ}\text{C}$
M	安装力矩 - M3 Mounting Torque - M3		0.6	Nm

电特性值
Electrical Characteristics

 除非特别声明，否则 $T_{vj} = 25\text{ }^{\circ}\text{C}$
 $T_{vj} = 25\text{ }^{\circ}\text{C}$ unless otherwise stated

符号 Symbol	参数名称 Parameter	测试条件 Test Conditions	最小值 Min.	典型值 Typ.	最大值 Max.	单位 Unit
V_{DC}	击穿电压 DC Blocking Voltage	$I_R = 100\mu\text{A}$	1200			V
V_F	正向电压 Diode forward voltage	$I_F = 30\text{A}$		1.37		V
		$I_F = 30\text{A}$, $T_{vj} = 175^{\circ}\text{C}$		1.84		V
I_R	反向电流 Reverse current	$V_R = 1200\text{V}$			1	μA
		$V_R = 1200\text{V}$, $T_{vj} = 175^{\circ}\text{C}$			5	μA
Q_C	总电容电荷 Total Capacitive Charge	$V_R = 800\text{V}$		165		nC
C	总电容 Total Capacitance	$V_R = 1\text{V}$, $f = 100\text{KHz}$		1646		pF
		$V_R = 400\text{V}$, $f = 100\text{KHz}$		155		
		$V_R = 800\text{V}$, $f = 100\text{KHz}$		135		

热学特性
Thermal Characteristics

符号 (Symbol)	参数名称 (Parameter)	条件 (Test Conditions)	最小值 (Min)	典型值 (Typ)	最大值 (Max)	单位 (Unit)
$R_{th(j-c)}$	结壳热阻 Thermal resistance, junction – case			0.36		K/W

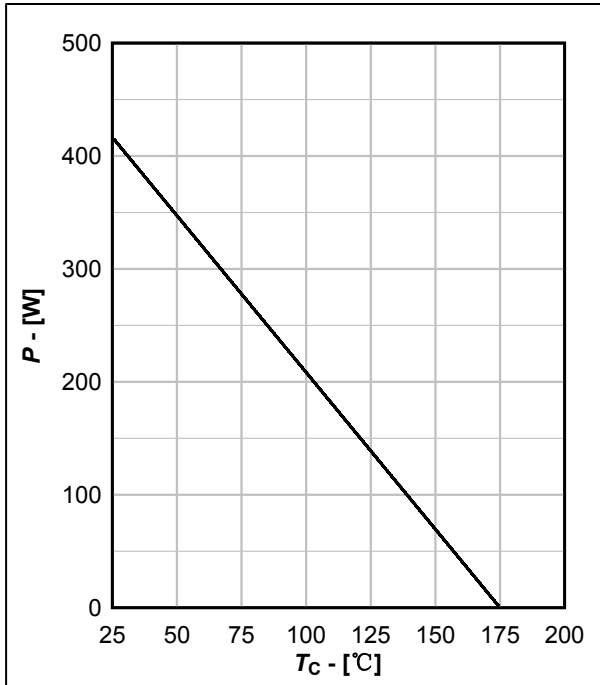


图 3 典型功率降额曲线, $P_{\text{tot}}=f(T_c)$

Fig.3 Power dissipation per leg as function of case temperature, $P_{\text{tot}}=f(T_c)$

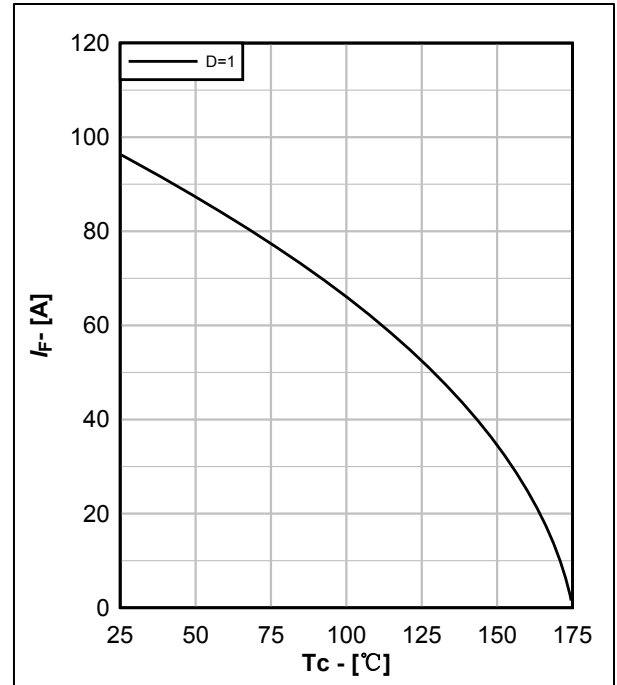


图 4. 不同负载下的电流曲线, $I_F=f(T_c)$

Fig.4 Diode forward current per leg as function of temperature, $I_F=f(T_c)$

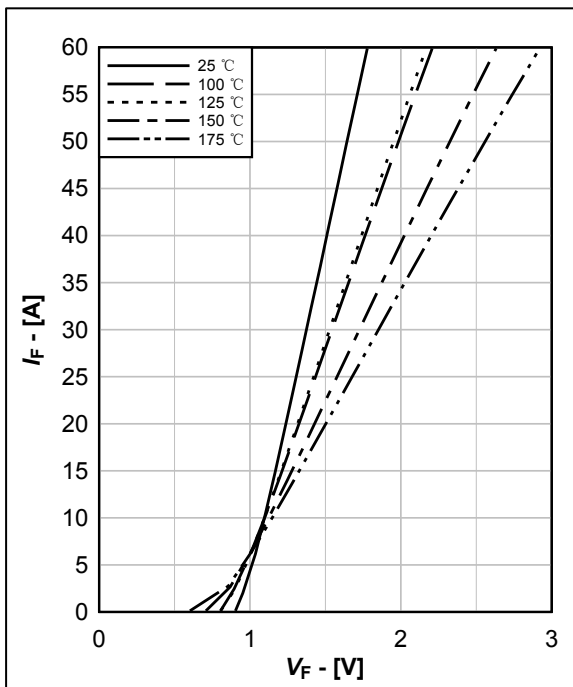


图 5. 典型正向特性曲线, $I_F=f(V_F)$

Fig.5 Typical forward characteristics per leg, $I_F=f(V_F)$

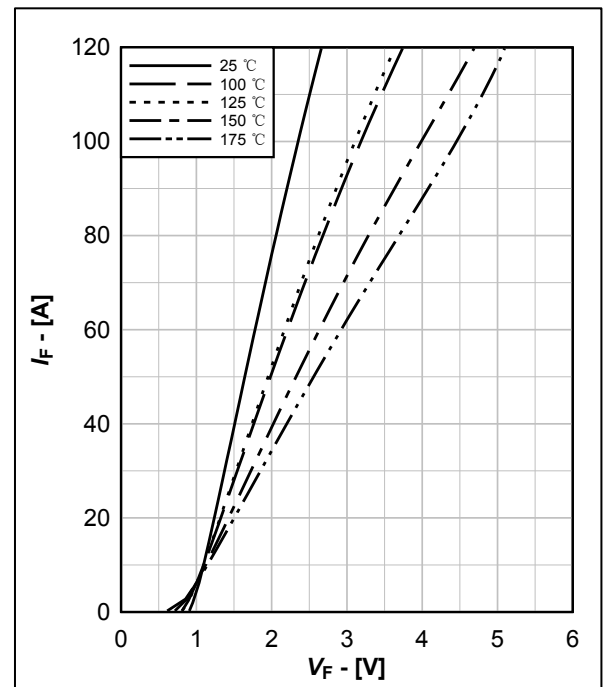


图 6. 典型正向特性曲线, $I_F=f(V_F)$

Fig.6 Typical forward characteristics per leg, $I_F=f(V_F)$

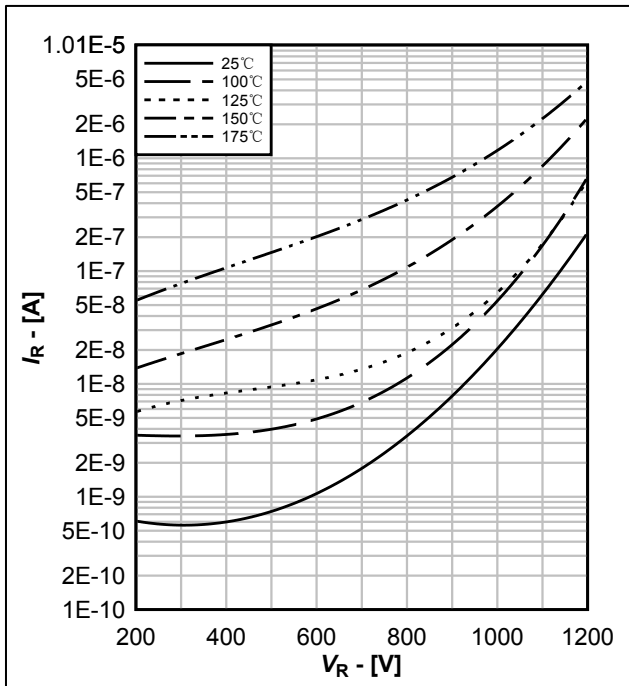


图 7. 典型反向特性曲线, $I_R = f(V_R)$

Fig.7 Typical IGBT output characteristics, $I_R = f(V_R)$

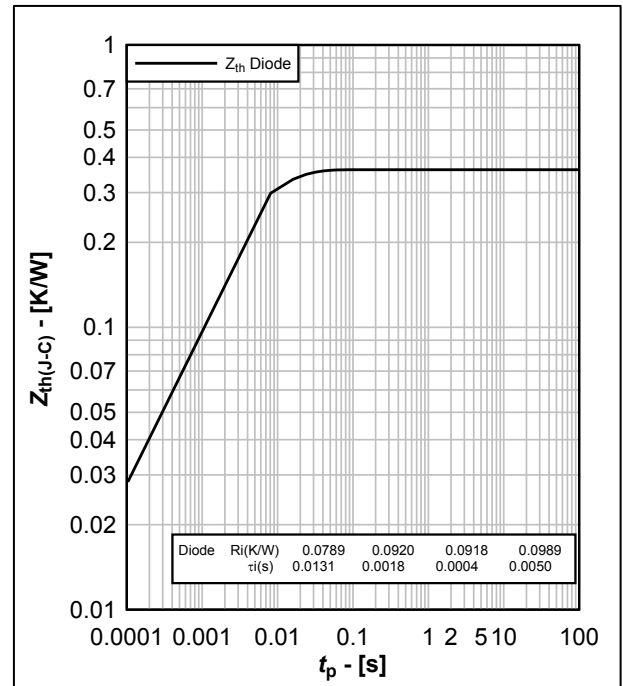


图 8. 瞬态热阻抗曲线, $Z_{th(J-C)} = f(t_p)$

Fig.8 Transient thermal impedance, $Z_{th(J-C)} = f(t_p)$

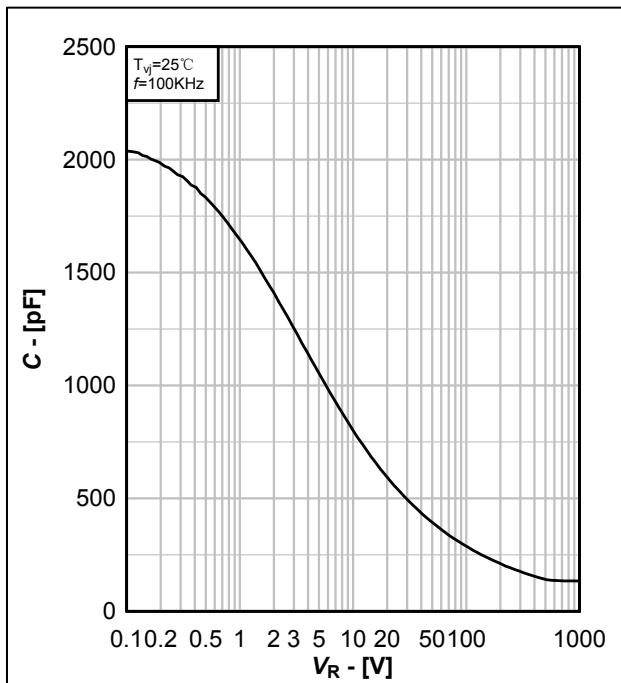


图 9. 典型电容与反向电压曲线, $C = f(V_R)$

Fig.9 Typical capacitance per leg as function of reverse voltage, $C = f(V_R)$


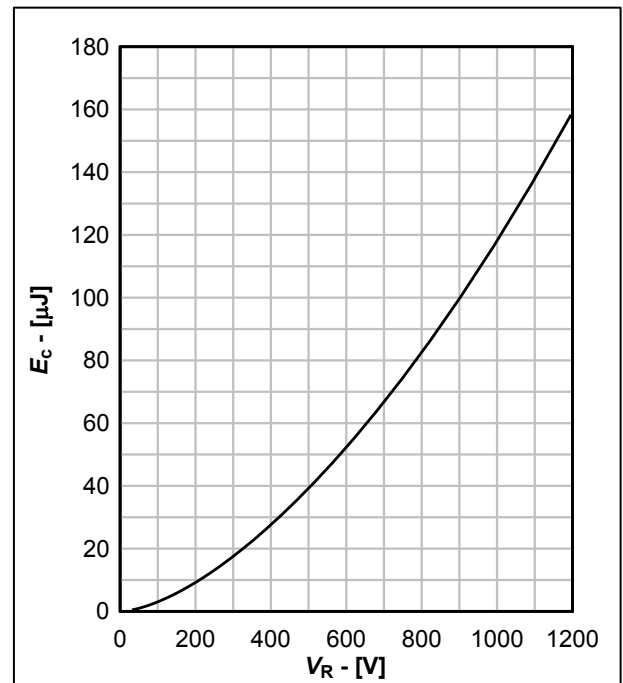


图 10. 典型电容能量与反向电压曲线, $E_C = f(V_R)$

Fig.10 Typical capacitively stored energy as function of reverse voltage, per leg, $E_C = f(V_R)$

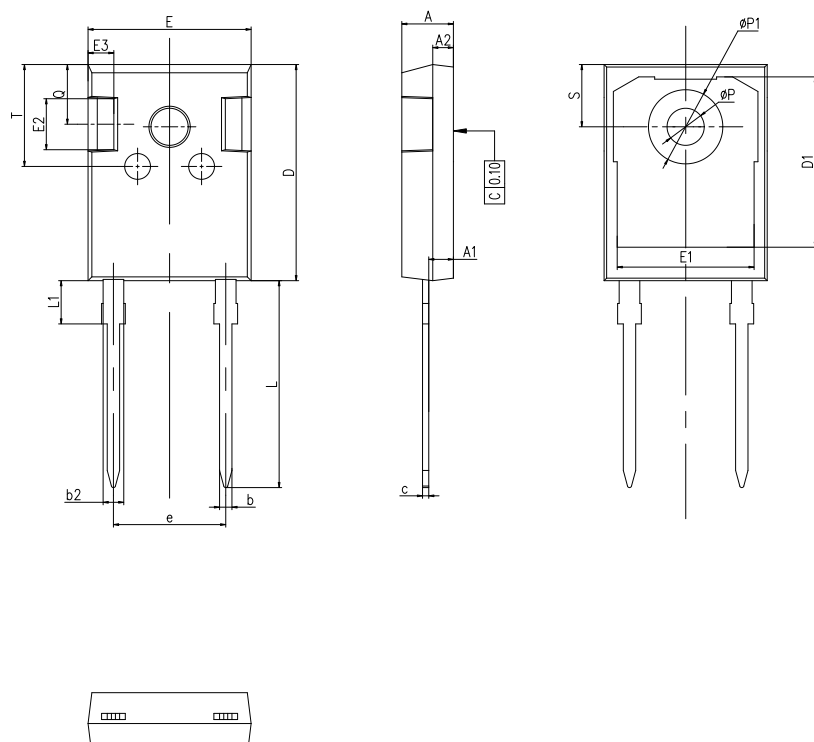

SYMBOL	mm		
	MIN	NOM	MAX
A	4.80	5.00	5.20
A1	2.21	2.41	2.59
A2	1.85	2.00	2.15
b	1.11	-	1.36
b2	1.91	-	2.21
c	0.51	-	0.75
D	20.70	21.00	21.30
D1	16.25	16.55	16.85
E	15.50	15.80	16.10
E1	13.00	13.30	13.60
E2	4.80	5.00	5.20
E3	2.30	2.50	2.70
e	10.78	10.88	10.98
L	19.62	19.92	20.22
L1	3.93	-	4.46
P	3.40	3.60	3.80
P1	-	-	7.40
S	6.05	6.15	6.25

图 11. 封装尺寸

Fig. 11 Package Dimensions

株洲中车时代半导体有限公司

ZHUZHOU CRRC TIMES SEMICONDUCTOR CO., LTD

地 址 Address 湖南省株洲市石峰区田心工业园

Tianxin Industrial Park, Shifeng District,
ZhuZhou City, Hunan Province, China

邮 编 Zipcode 412001

电 话 Telephone +86 (0)731-28498268, 28498238, 28493472

传 真 Fax +86 (0)731-28498851, 28498494

电子邮箱 Email ctsc@csrzc.com

网 址 Web Site [http:// ctsc.csrzc.com](http://ctsc.csrzc.com)

使用条件和条款

(1) 数据手册中的产品信息是专门为技术人员提供的。由于产品应用的多样性，本文件所包含的信息只能作为一般性指南，无法保证其在某些特殊应用中的适用性，建议用户在使用前评估产品的适用性。如果需要额外的产品信息和帮助，请联系我公司的销售或技术支持。

(2) 本产品数据手册中提供的一部分产品数据是产品的典型值，实际出厂测试的产品数据可能与典型值略有偏离，但我公司保证这些偏离不会影响产品的正常使用。如果产品信息发生变更，我公司会及时修订产品数据手册，请随时关注我公司网站发布的产品手册信息。

(3) 如果对本产品有特殊要求，或用于特殊行业（如航空航天、医疗、生命维持等），强烈建议用户与我公司联合进行应用风险和产品质量评估，建立统一的质量协议。

(4) 产品使用过程中，如有超出产品数据手册中所定义的产品极限温度、电压、电流或安全工作区范围的情况，我公司无法保证产品的应用可靠性。

(5) 产品数据手册首页的右上角，会显示产品的状态。如果它尚未完全批准，会标示**初版 (preliminary)**，该标示意味着该产品已完成设计，量产的产品参数正在确定中，数据手册中的产品信息目前是可以参考的，但将来某些细节可能会发生变化。如果产品数据手册首页的右上角没有标注，则表示该产品已可以批量生产。

Terms and conditions of usage

(1) The product information in this datasheet are intended for use by technical personnel. Due to the diversity of product applications, the information contained in this document can only be used as a general guide, the application applicability cannot be guaranteed in some special applications. It is recommended that users do the assessment of the application applicability before applied. If users need additional product information and help, please contact our sales or technical support.

(2) Some product data in the datasheet of this product are the typical values, the actual factory testing data may deviate slightly from typical values, but our company guarantees that these deviations will not affect the normal use of the product. If the product information changes, our company will promptly amend the datasheet, please keeps your attention to product information changing in our company website.

(3) If there are special requirements for the product, or apply it in special industries (such as aerospace, medical, life support, etc.), we strongly recommend that to perform joint application risk and quality assessments, get the quality agreements.

(4) During the application, if the working conditions are beyond the limitation of temperature, voltage, current or safe operating area of the product defined in the product datasheet, our company cannot guarantee the reliability of the product.

(5) We annotate datasheet in the top right hand corner of the front page, to indicate product status. The annotation“Preliminary” indicates the product design is complete and final characterization for volume production is in progress, the product information in the datasheet is currently can be referenced, but some details may change in the future. There is no annotation indicates the product is capable to produce in batch quantity.