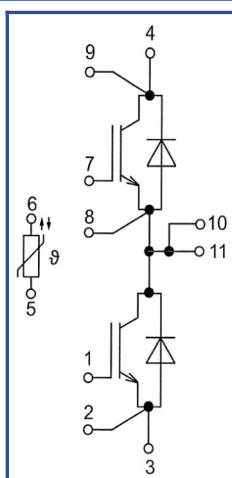
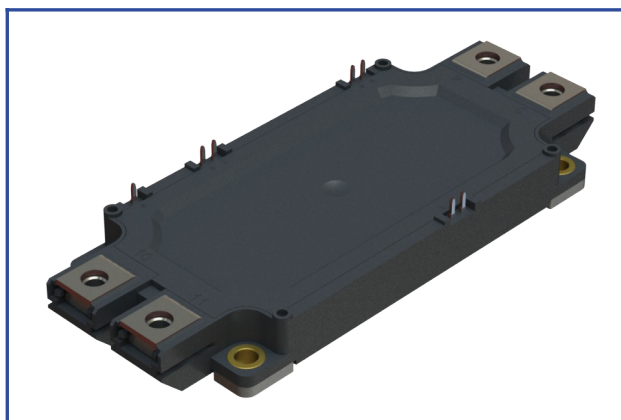


Low Inductance IGBT Module with 17 mm Height Housing
1200 V 600 A

Chip features

- IGBT chip
 - low $V_{CE(sat)}$ value
 - 10 μs short circuit duration at 150°C
 - square RBSOA of 2xI_C
- FRD chip
 - fast and soft reverse recovery
 - low voltage drop

Design features

- copper baseplate
- Al₂O₃ DBC substrate
- ultrasonic welded power terminals
- improved thermal cycling
- RoHS compliant
- low inductance value

Typical application

- AC motor drives
- solar inverters
- air conditioning
- high power converters and UPS
- Inverters for wind energy converters

Maximum rated values

Definition	Symbol	Conditions	Value	Unit
IGBT				
Collector-Emitter voltage	V_{CES}	$V_{GE} = 0$.	1200	V
Maximum allowable collector current (continuous)	$I_{C\ 25}$	$T_{vj\ (max)} = 175^{\circ}C$; $T_c = 25^{\circ}C$.	749	A
	$I_{C\ 80}$	$T_{vj\ (max)} = 175^{\circ}C$; $T_c = 80^{\circ}C$.	577	A
Repetitive peak collector current ^{*1}	I_{CRM}	$I_{CRM} = 3 \times I_{C\ nom}$; $t_p = 1\ ms$.	1800	A
Short-circuit duration	t_{psc}	$T_{vj} = 25^{\circ}C$; $V_{GE} = \pm 15\ V$; $V_{CE} = 720\ V$; $R_{G\ on} = R_{G\ off} = 1.5\ \Omega$.	10	μs
		$T_{vj} = 150^{\circ}C$; $V_{GE} = \pm 15\ V$; $V_{CE} = 720\ V$; $R_{G\ on} = R_{G\ off} = 1.5\ \Omega$.	10	
Gate-Emitter voltage	V_{GES}		± 20	V
Junction operating temperature	$T_{vj\ (op)}$		-40...+150	°C
Inverse diode				
Repetitive peak reverse voltage	V_{RRM}	$V_{GE} = 0\ V$.	1200	V
Maximum allowable forward current (continuous)	$I_{F\ 25}$	$T_{vj\ (max)} = 175^{\circ}C$; $T_c = 25^{\circ}C$.	583	A
	$I_{F\ 80}$	$T_{vj\ (max)} = 175^{\circ}C$; $T_c = 80^{\circ}C$.	442	A
Repetitive peak forward current ^{*1}	I_{FRM}	$I_{FRM} = 3 \times I_{F\ nom}$; $t_p = 1\ ms$.	1800	A
Junction operating temperature	$T_{vj\ (op)}$		-40...+150	°C
Module				
Storage temperature	T_{stg}		-55...+50	°C
Isolation voltage	V_{isol}	AC sin 50 Hz; $t = 1\ min$.	4000	V

^{*1} Pulse width and repetition rate should be such that device junction temperature does not exceed maximum T_{vj} rating



Characteristics

Definition	Symbol	Conditions		Value			Unit.	
				min.	typ.	max.		
IGBT								
Collector-Emitter saturation voltage	V_{CEsat}	$V_{GE} = +15\text{ V}; I_C = 600\text{ A};$ $t_u = 1000\text{ }\mu\text{s.}$	$T_{vj} = 25^\circ\text{C}$ $T_{vj} = 150^\circ\text{C}$	1.80 2.35	2.25 2.95	2.70 3.55	V V	
Gate-Emitter threshold voltage	$V_{GE(th)}$	$I_C = 24\text{ mA}; V_{CE} = V_{GE}; T_{vj} = 25^\circ\text{C};$ $t_u = 2\text{ ms.}$		4.15	5.80	8.10	V	
Collector-Emitter cut-off current	I_{CES}	$V_{CE} = 1200\text{ V};$ $t_u = 50\text{ ms}; V_{GE} = 0.$	$T_{vj} = 25^\circ\text{C}$ $T_{vj} = 150^\circ\text{C}$	- -	12.00 2.00	300 5.00	μA mA	
Gate-Emitter leakage current	I_{GES}	$V_{CE} = 0; V_{GE} = \pm 20\text{ V}; T_{vj} = 25^\circ\text{C};$ $t_u = 30\text{ ms.}$		-	11.00	200	nA	
Input capacitance	C_{ies}	$V_{CE} = 25\text{ V}; V_{GE} = 0\text{ V};$		-	-	-	nF	
Reverse transfer capacitance	C_{res}	$f = 1\text{ MHz}; T_{vj} = 25^\circ\text{C.}$		-	-	-	nF	
Total gate charge	Q_G	$I_C = 600\text{ A}; V_{CE} = 600\text{ V};$ $V_{GE} = -8...+15\text{ V.}$		-	5600	5900	nC	
Internal gate resistance	R_{Gint}	$T_{vj} = 25^\circ\text{C.}$		-	1.20	-	Ω	
Turn-on delay time	$t_{d(on)}$	$V_{CE} = 600\text{ V};$ $V_{GE} = \pm 15\text{ V};$ $I_{C\text{ max}} = 600\text{ A};$ $R_G = 1.5\text{ }\Omega;$ $L_s = 56\text{ nH.}$	$T_{vj} = 25^\circ\text{C}$ $T_{vj} = 150^\circ\text{C}$	240 268	416 494	592 720	ns	
Rise time	t_{ri}		$T_{vj} = 25^\circ\text{C}$ $T_{vj} = 150^\circ\text{C}$	92 120	120 162	148 204		ns
Turn-on energy	E_{on}		$T_{vj} = 25^\circ\text{C}$ $T_{vj} = 150^\circ\text{C}$	25.5 57.5	56.0 108.5	86.5 159.5	mJ	
Turn-off delay time	$t_{d(off)}$		$T_{vj} = 25^\circ\text{C}$ $T_{vj} = 150^\circ\text{C}$	438 483	554 600	670 717		ns
Fall time	t_{fi}		$T_{vj} = 25^\circ\text{C}$ $T_{vj} = 150^\circ\text{C}$	88 168	132 218	176 268	ns	
Turn-off energy	E_{off}		$T_{vj} = 25^\circ\text{C}$ $T_{vj} = 150^\circ\text{C}$	44.0 58.0	53.5 71.0	63.0 84.0		mJ
Collector-emitter threshold voltage	V_{CE0}		$V_{GE} = +15\text{ V}; T_{vj} = 150^\circ\text{C};$		0.82	0.84	0.86	
On-State slope resistance (IGBT)	r_{CE0}		$I_{CE1} = 150\text{ A}; I_{CE2} = 600\text{ A};$ $t_u = 1000\text{ }\mu\text{s.}$		3.27	3.63	3.99	m Ω
Thermal resistance junction to case	$R_{th(j-c)}$	DC; $I_{test} = 1.5\text{ A};$ $V_{GE} = +15\text{ V.}$		-	0.043	0.052	K/W	
Inverse diode								
Forward voltage drop	V_F	$I_F = 600\text{ A};$ $V_{GE} = 0; t_u = 1000\text{ }\mu\text{s.}$	$T_{vj} = 25^\circ\text{C}$ $T_{vj} = 150^\circ\text{C}$	1.60 1.95	2.10 2.50	2.60 3.05	V V	
Reverse recovery time	t_{rr}	$V_{CE} = 600\text{ V};$ $V_{GE} = \pm 15\text{ V};$ $I_{C\text{ max}} = 600\text{ A};$ $R_G = 1.5\text{ }\Omega;$ $L_s = 56\text{ nH.}$	$T_{vj} = 25^\circ\text{C}$ $T_{vj} = 150^\circ\text{C}$	206 367	258 505	310 643	ns ns	
Peak reverse current	I_{RM}		$T_{vj} = 25^\circ\text{C}$ $T_{vj} = 150^\circ\text{C}$	265 210	400 360	535 510	A A	
Recovered charge	Q_r		$T_{vj} = 25^\circ\text{C}$ $T_{vj} = 150^\circ\text{C}$	42.0 73.5	60.0 102.0	78.0 130.5	μC μC	
Reverse recovery energy	E_{rec}		$T_{vj} = 25^\circ\text{C}$ $T_{vj} = 150^\circ\text{C}$	13.0 19.5	23.0 33.0	33.0 46.5	mJ mJ	
Threshold voltage	$V_{(T0)}$		$T_{vj} = 150^\circ\text{C}; V_{GE} = 0; I_{CE1} = 150\text{ A};$		0.85	0.88	0.91	V
Forward slope resistance	r_T		$I_{CE2} = 600\text{ A}; t_u = 1000\text{ }\mu\text{s}$		2.31	2.82	3.33	m Ω
Thermal resistance junction to case	$R_{th(jc-D)}$	DC; $I_{test} = 1.5\text{ A};$ $V_{GE} = 0\text{ V.}$		-	0.081	0.090	K/W	



Module							
Pin resistance	R _{Pxy}	T _{vj} = 25°C.	RP10/11-3	-	0.92	1.00	mΩ
			RP10/11-4	-	0.59	1.00	
Parasitic inductance between terminals	L _{Pce}			-	26.00	-	nH
Thermistor resistance	R _t	T _{vj} = 25°C		4850	-	6225	Ω
		T _{vj} = 150°C		160	-	195	
Coefficient of temperature sensitivity	B _{25/50}	R ₂ = R ₂₅ exp [B _{25/50} (1/T ₂ - 1/T ₁)], T ₁ = 298,15 K		-	3375	-	κ
Thermal resistance case to heatsink	R _{thCH}	per module		-	0.009	0.014	K/W
Mounting torque for screws to heatsink	M _s	to heatsink M5		3	-	6	N*m
Mounting torque for terminal screws	M _t	to terminals M6		3	-	6	N*m
Weight	W			-	-	360	g

Notes:

- Insulating material operating temperature 125°C max;
- Case temperature 125°C max;
- The recommended operating junction temperature $T_{vj\text{ op}} = -40...+150^{\circ}\text{C}$.

Chart 1 – typ. output characteristic, IGBT.





 $V_{GE} = +15 \text{ V.}$

Chart 2 – max. rated current vs temperature.




DC;
 $V_{GE} = +15 \text{ V;}$
 $T_{vj(max)} = 150^\circ\text{C.}$

Chart 3 – typ. turn-on/off energy vs rated current, IGBT.

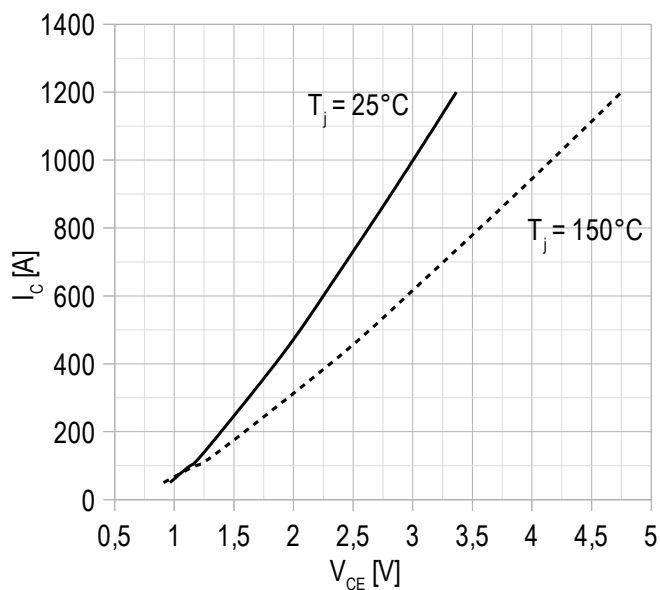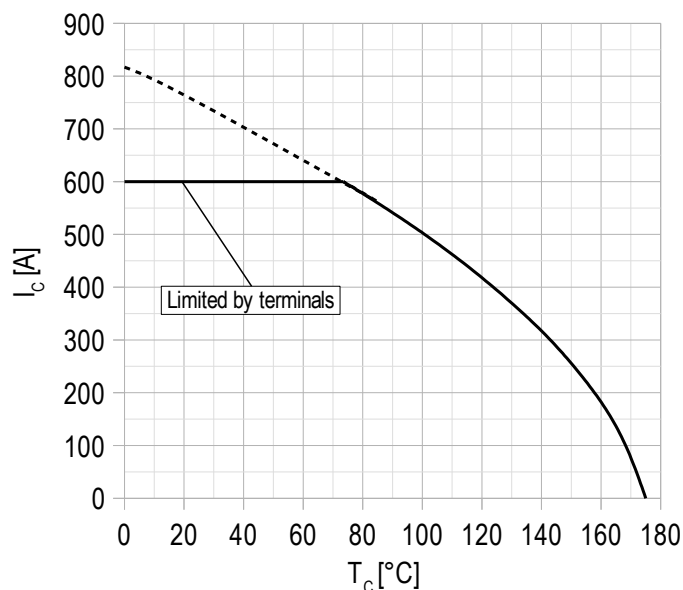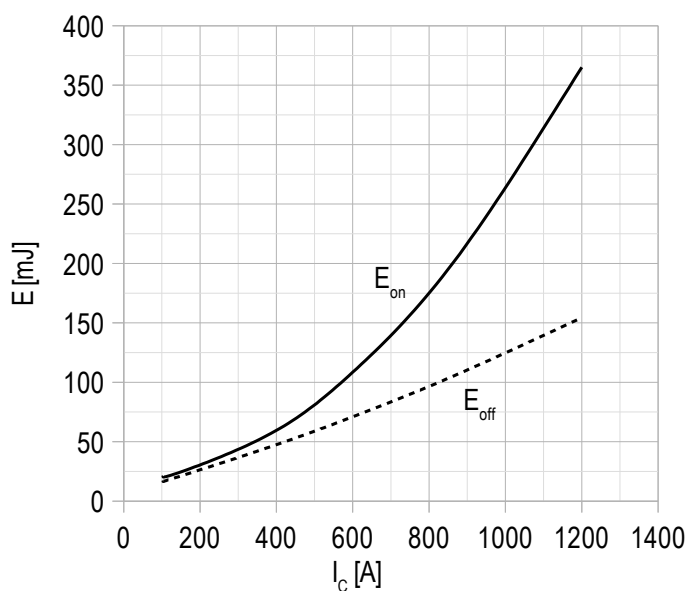


$V_{CE} = 600 \text{ V;}$
 $V_{GE} = \pm 15 \text{ V;}$
 $R_G = 1.5 \Omega;$
 $L_s = 56 \text{ nH;}$
 $T_{vj(max)} = 150^\circ\text{C.}$


Chart 4 – typ. turn-on/off energy vs gate resistance, IGBT.

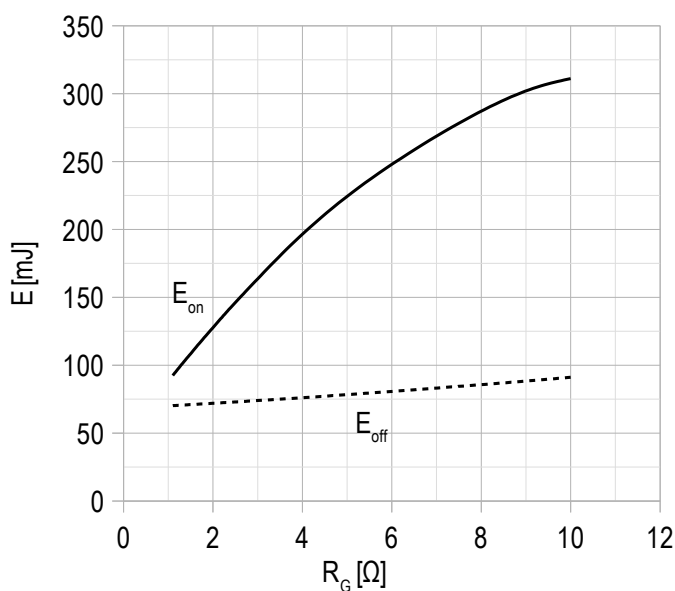


$V_{CE} = 600 \text{ V;}$
 $V_{GE} = \pm 15 \text{ V;}$
 $I_{Cmax} = 600 \text{ A;}$
 $L_s = 56 \text{ nH;}$
 $T_{vj(max)} = 150^\circ\text{C.}$

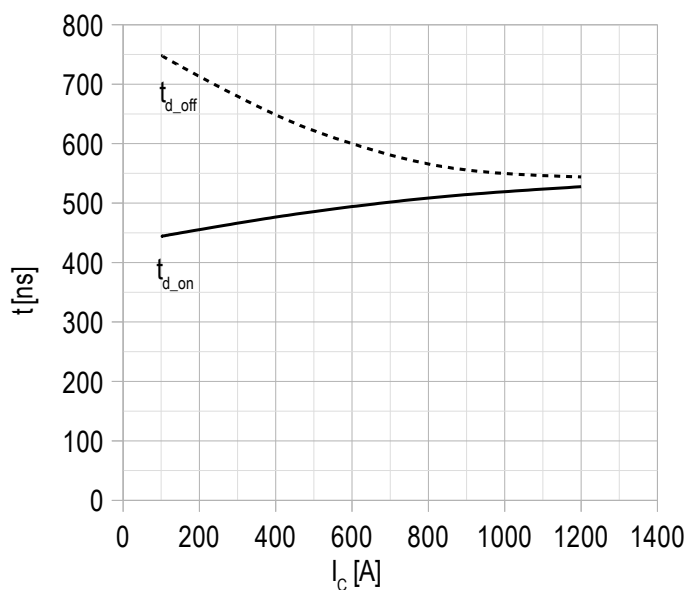Chart 5 – typ. switching times vs rated current, IGBT.


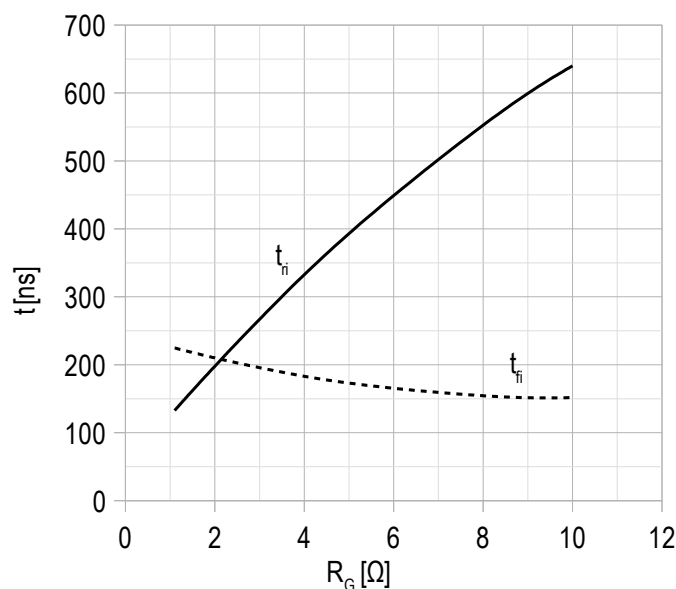
$V_{CE} = 600 \text{ V};$
 $V_{GE} = \pm 15 \text{ V};$
 $R_G = 1.5 \Omega;$
 $L_s = 56 \text{ nH};$
 $T_{vj(max)} = 150^\circ\text{C}.$

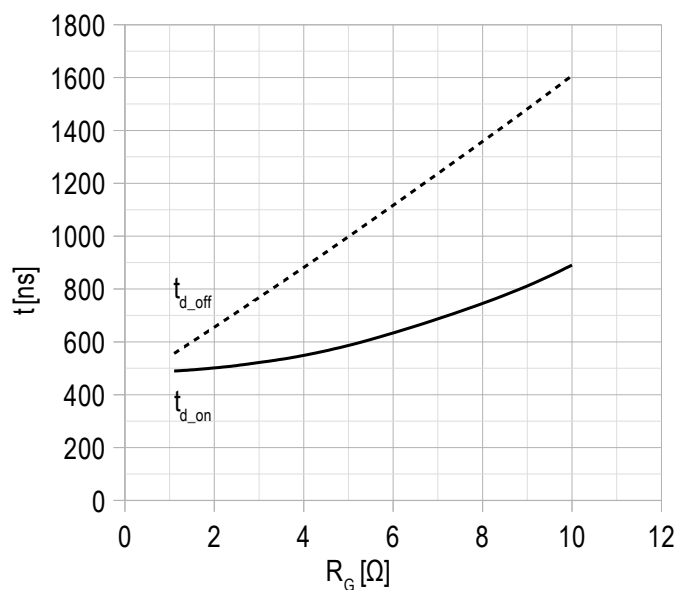Chart 6 – typ. switching times vs gate resistance, IGBT.


$V_{CE} = 600 \text{ V};$
 $V_{GE} = \pm 15 \text{ V};$
 $I_{Cmax} = 600 \text{ A};$
 $L_s = 56 \text{ nH};$
 $T_{vj(max)} = 150^\circ\text{C}.$

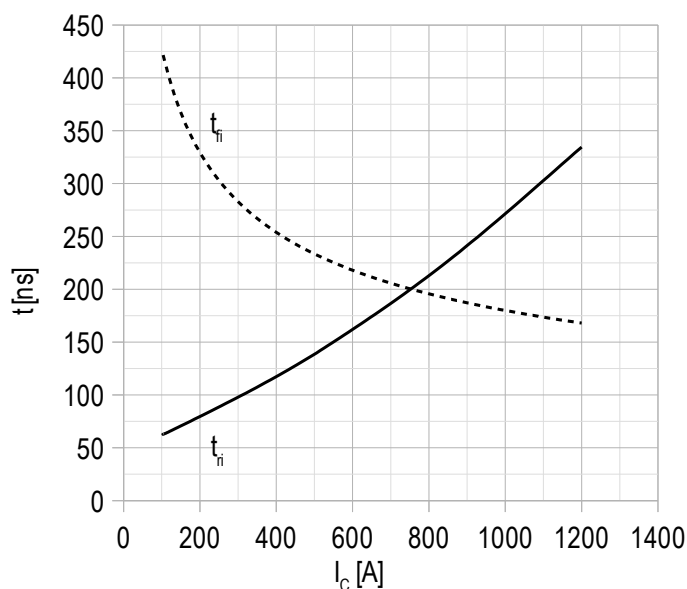
Chart 7 – typ. switching times vs rated current, IGBT.


$V_{CE} = 600 \text{ V};$
 $V_{GE} = \pm 15 \text{ V};$
 $R_G = 1.5 \Omega;$
 $L_s = 56 \text{ nH};$
 $T_{vj(max)} = 150^\circ\text{C}.$

Chart 8 – typ. switching times vs gate resistance, IGBT.


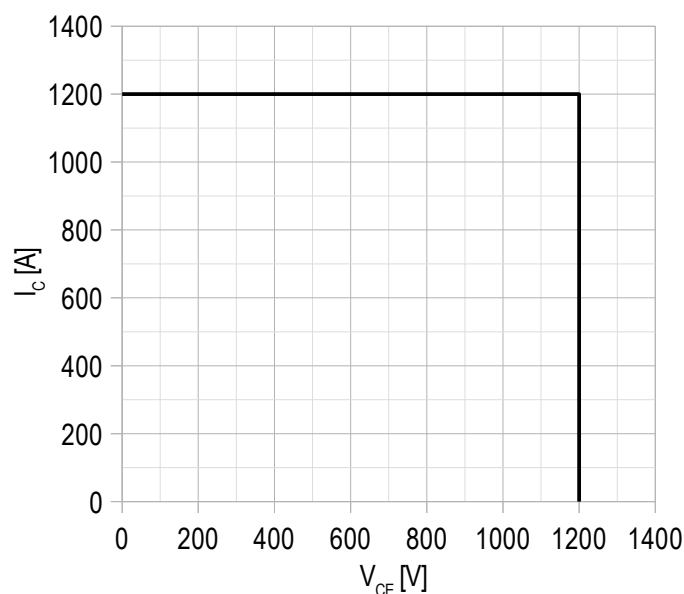
$V_{CE} = 600 \text{ V};$
 $V_{GE} = \pm 15 \text{ V};$
 $I_{Cmax} = 600 \text{ A};$
 $L_s = 56 \text{ nH};$
 $T_{vj(max)} = 150^\circ\text{C}.$

Chart 9 – max. transient thermal impedance.

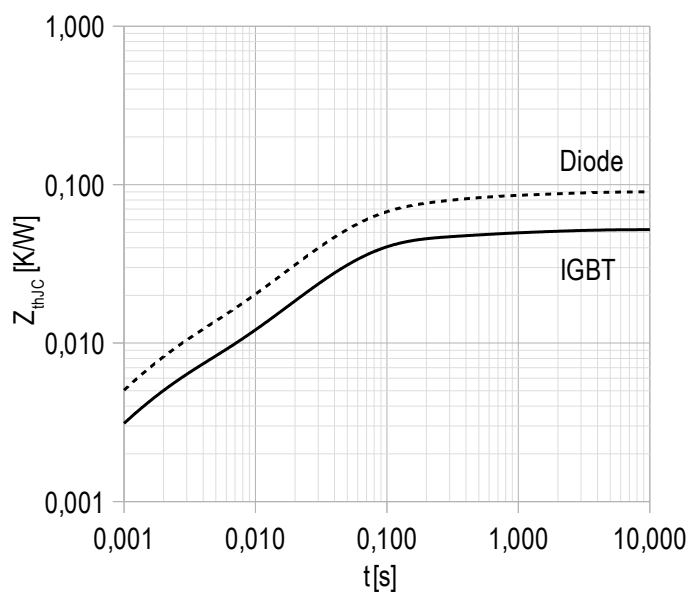


Single pulse;
 $V_{GE} = +15 \text{ V}$.

Chart 10 – RBSOA.




$V_{CE \text{ max}} = 1200 \text{ V}$;
 $V_{GE} = \pm 15 \text{ V}$;
 $I_{C \text{ max}} = 2 \cdot I_{C \text{ nom}}$;
 $R_G = 1.5 \Omega$;
 $L_s = 56 \text{ nH}$.

Chart 11 – typ. output characteristic, FRD.

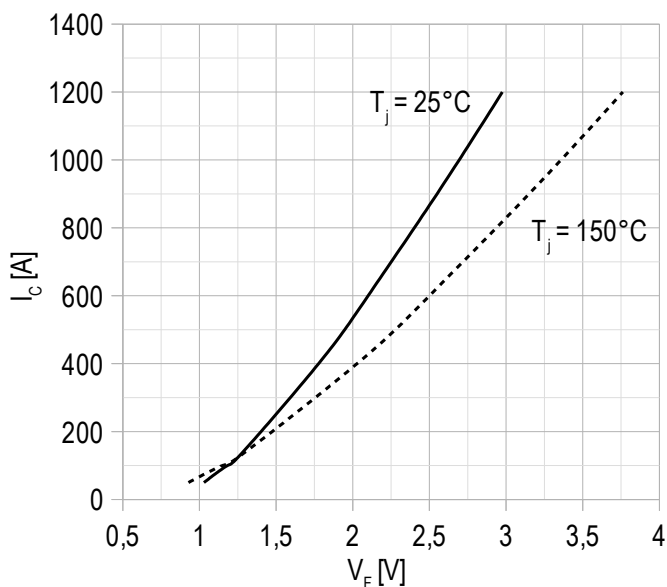


$V_{GE} = 0 \text{ V}$.


Chart 12 – typ. switching losses vs rated current, FRD.

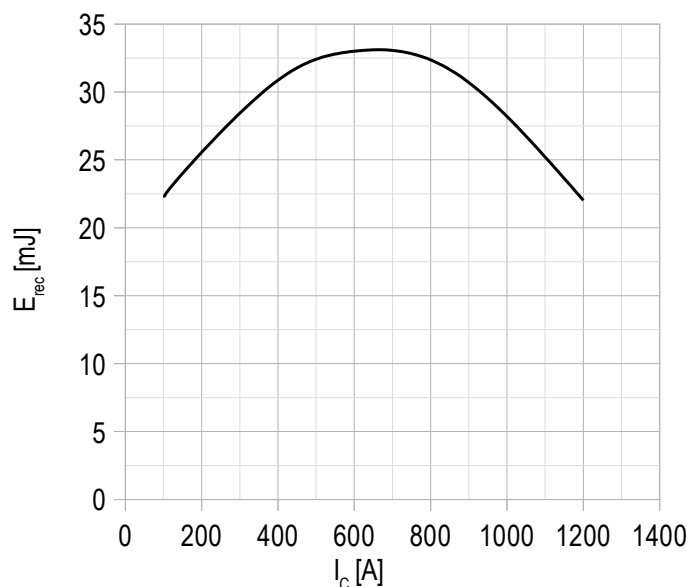


$V_{GE} = \pm 15 \text{ V}$;
 $V_{CE} = 600 \text{ V}$;
 $L_s = 56 \text{ nH}$;
 $R_{G \text{ on}} = 1.5 \Omega$;
 $T_{vj \text{ (max)}} = 150^\circ\text{C}$.

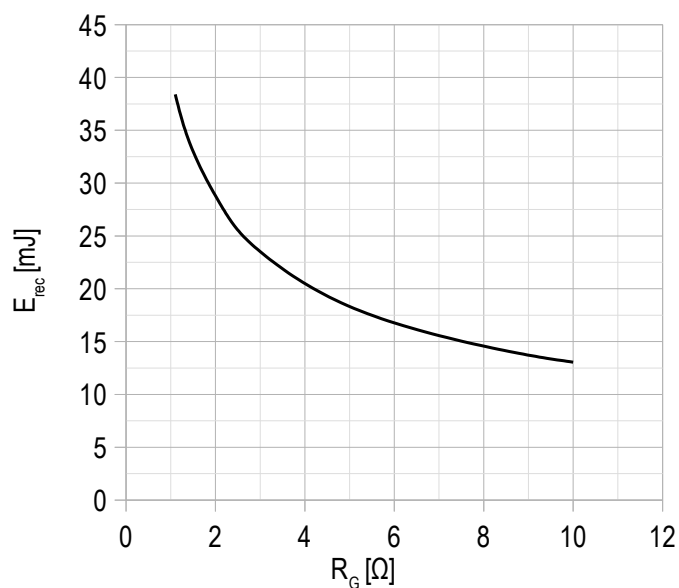Chart 13 – typ. switching losses vs gate resistance, FRD.


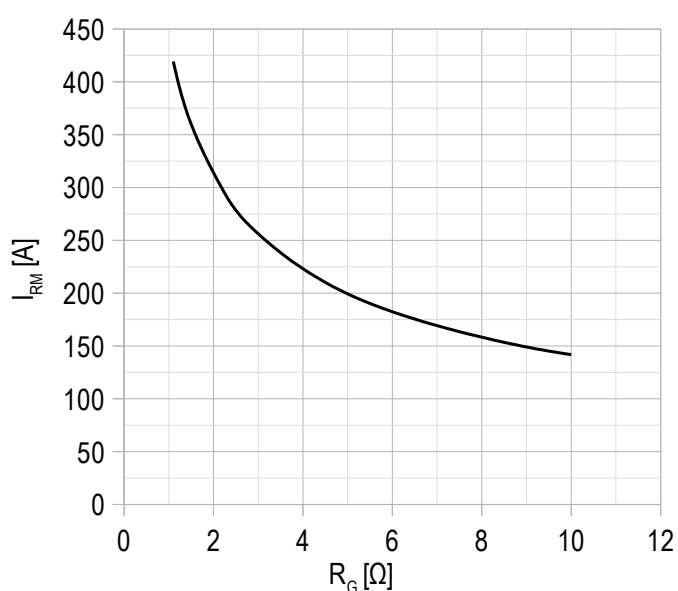
$V_{GE} = \pm 15$ V;
 $V_{CE} = 600$ V;
 $I_{C\ max} = 600$ A;
 $L_s = 56$ nH;
 $T_{vj\ (max)} = 150^\circ\text{C}$.

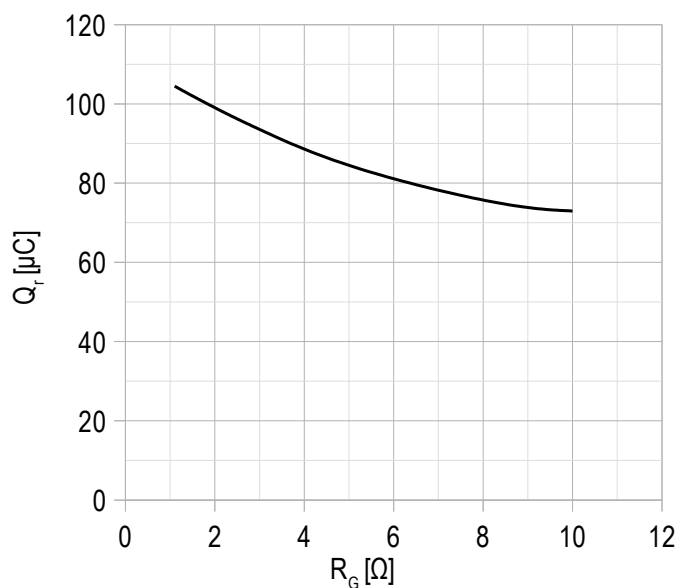Chart 14 – typ. reverse recovered charge vs gate resistance, FRD.


$V_{GE} = \pm 15$ V;
 $V_{CE} = 600$ V;
 $I_{C\ max} = 600$ A;
 $L_s = 56$ nH;
 $T_{vj\ (max)} = 150^\circ\text{C}$.

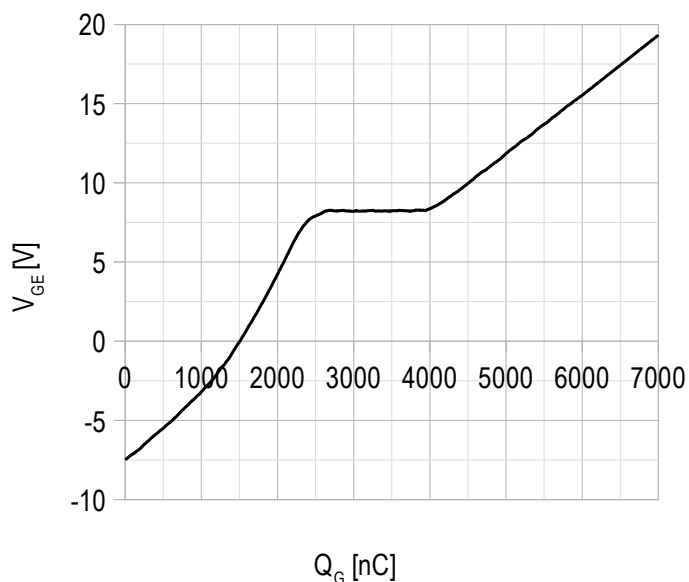
Chart 15 – typ. gate charge characteristic.


$I_C = 600$ A;
 $V_{CE} = 600$ V;
 $V_{GE} = -8 \div 15$ V.

Chart 16 – typ. reverse recovery current vs gate resistance FRD.


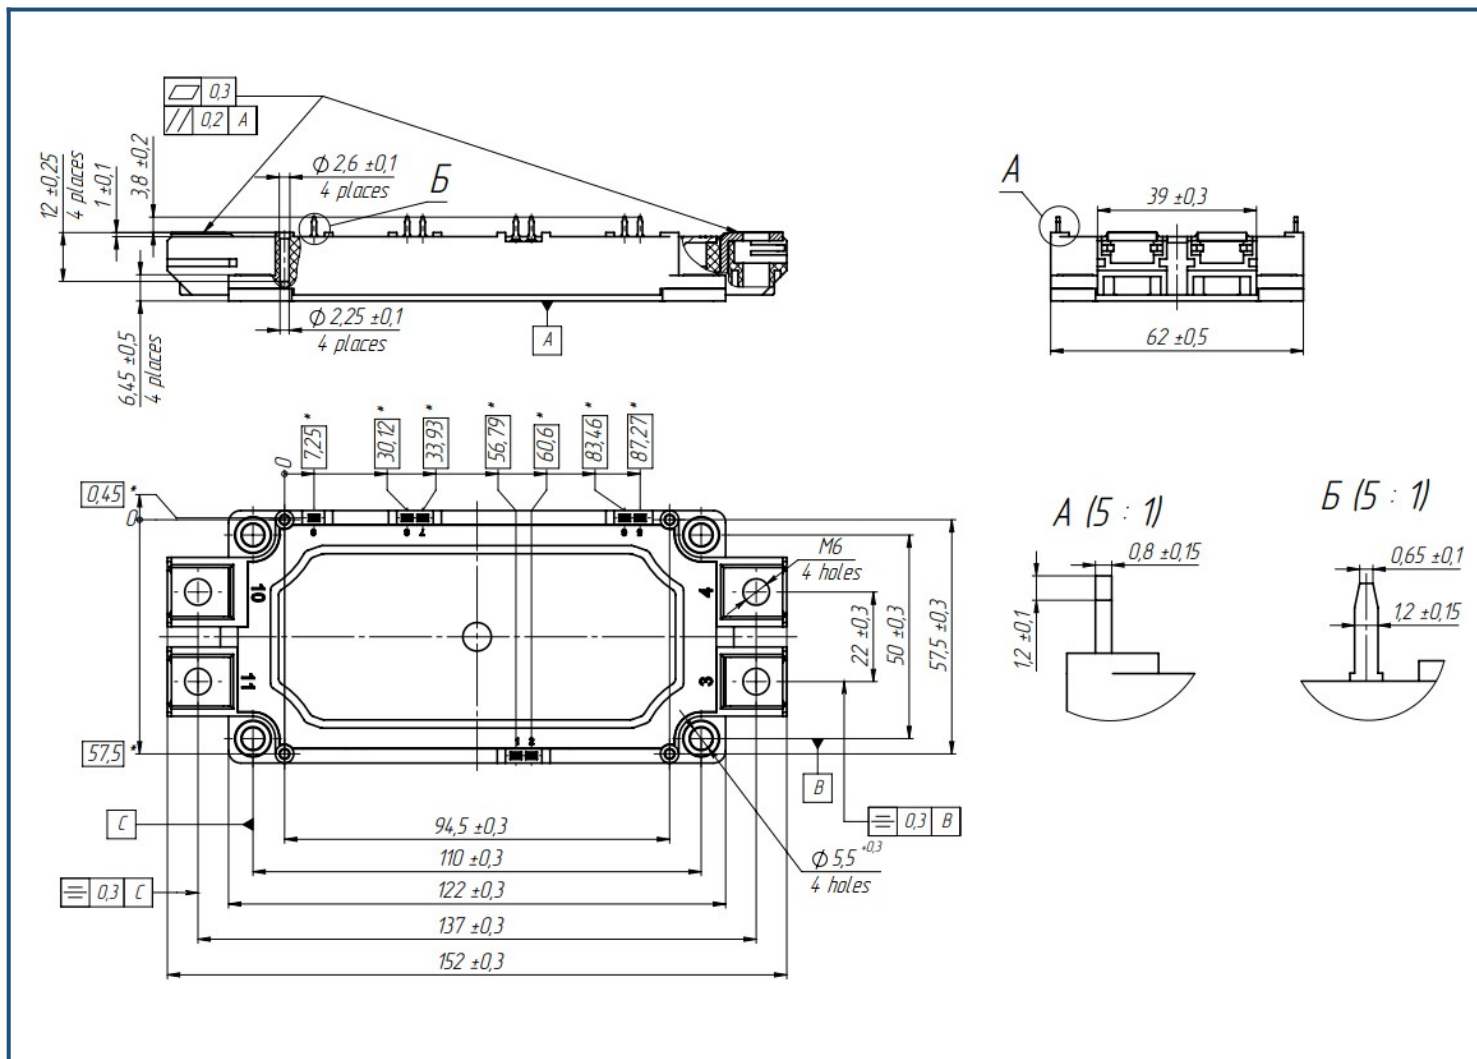
$V_{CE} = 600$ V;
 $V_{GE} = \pm 15$ V;
 $L_s = 56$ nH;
 $T_{vj\ (max)} = 150^\circ\text{C}$.

Chart 17 – max. rated current vs frequency.

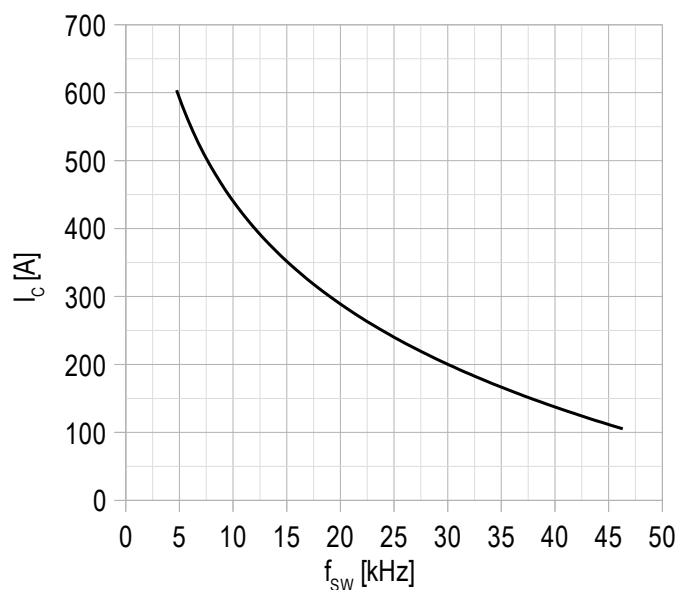

Duty cycle 50%;

 $V_{CE} = 600$ V; $T_c = 80$ °C; $T_{vj(max)} = 175$ °C.

Overall dimensions: Package type – D2

Part numbering guide

MID2	-	HB	12	SG	-	600	N	
MID2								IGBT module package type: D2
		HB						2 switches as Half-Bridge
			12					Voltage rating ($V_{CES}/100$)
				SG				IGBT+FRD chipset modification
						600		Current Rating
							N	Climatic version: normal climate

The information contained herein is protected by Copyright. In the interest of product improvement, Proton-Electrotex reserves the right to change datasheet without notice.