



High power cycling capability
Low on-state and switching losses
Designed for traction and industrial applications

Phase Control Thyristor Type T853-500-65

Maximum allowable mean on-state current					I _{TAV}		500 A					
Repetitive peak off-state voltage					V _{DRM}		4600...6500 V					
Repetitive peak reverse voltage					V _{RRM}							
Turn-off time					t _q		800 μs					
V _{DRM} , V _{RRM} , V	4600	4800	5000	5200	5400	5600	5800	6000	6200	6400	6500	
Voltage code	46	48	50	52	54	56	58	60	62	64	65	
T _j , °C	-60...+125											

MAXIMUM ALLOWABLE RATINGS

Symbols and parameters		Units	Values	Test conditions	
ON-STATE					
I_{TAV}	Maximum allowable mean on-state current	A	500 651	$T_c=98\text{ }^{\circ}\text{C}$, Double side cooled $T_c=85\text{ }^{\circ}\text{C}$, Double side cooled 180° half-sine wave; 50 Hz	
I_{TRMS}	RMS on-state current	A	785	$T_c=98\text{ }^{\circ}\text{C}$, Double side cooled 180° half-sine wave; 50 Hz	
I_{TSM}	Surge on-state current	kA	9.5 11.0	$T_j=T_{j\text{ max}}$ $T_j=25\text{ }^{\circ}\text{C}$	180° half-sine wave; $t_p=10\text{ ms}$; single pulse; $V_D=V_R=0\text{ V}$; Gate pulse: $I_G=2\text{ A}$; $t_{GP}=50\text{ }\mu\text{s}$; $di_G/dt\geq 1\text{ A}/\mu\text{s}$
			10.0 11.5	$T_j=T_{j\text{ max}}$ $T_j=25\text{ }^{\circ}\text{C}$	180° half-sine wave; $t_p=8.3\text{ ms}$; single pulse; $V_D=V_R=0\text{ V}$; Gate pulse: $I_G=2\text{ A}$; $t_{GP}=50\text{ }\mu\text{s}$; $di_G/dt\geq 1\text{ A}/\mu\text{s}$
I^2t	Safety factor	$A^2s\cdot 10^3$	450 600	$T_j=T_{j\text{ max}}$ $T_j=25\text{ }^{\circ}\text{C}$	180° half-sine wave; $t_p=10\text{ ms}$; single pulse; $V_D=V_R=0\text{ V}$; Gate pulse: $I_G=2\text{ A}$; $t_{GP}=50\text{ }\mu\text{s}$; $di_G/dt\geq 1\text{ A}/\mu\text{s}$
			410 540	$T_j=T_{j\text{ max}}$ $T_j=25\text{ }^{\circ}\text{C}$	180° half-sine wave; $t_p=8.3\text{ ms}$; single pulse; $V_D=V_R=0\text{ V}$; Gate pulse: $I_G=2\text{ A}$; $t_{GP}=50\text{ }\mu\text{s}$; $di_G/dt\geq 1\text{ A}/\mu\text{s}$
BLOCKING					
V_{DRM}, V_{RRM}	Repetitive peak off-state and Repetitive peak reverse voltages	V	4600...6500	$T_{j\text{ min}} < T_j < T_{j\text{ max}}$; 180° half-sine wave; 50 Hz; Gate open	
V_{DSM}, V_{RSM}	Non-repetitive peak off-state and Non-repetitive peak reverse voltages	V	4700...6600	$T_{j\text{ min}} < T_j < T_{j\text{ max}}$; 180° half-sine wave; single pulse; Gate open	
V_D, V_R	Direct off-state and Direct reverse voltages	V	$0.6\cdot V_{DRM}$ $0.6\cdot V_{RRM}$	$T_j=T_{j\text{ max}}$; Gate open	

TRIGGERING				
I_{FGM}	Peak forward gate current	A	8	$T_j = T_{j\max}$
V_{RGM}	Peak reverse gate voltage	V	5	
P_G	Gate power dissipation	W	4	$T_j = T_{j\max}$ for DC gate current
SWITCHING				
$(di_T/dt)_{crit}$	Critical rate of rise of on-state current non-repetitive ($f=1$ Hz)	A/ μ s	400	$T_j = T_{j\max}$; $V_D = 0.67 \cdot V_{DRM}$; $I_{TM} = 2150$ A; Gate pulse: $I_G = 2$ A; $t_{GP} = 50$ μ s; $di_G/dt \geq 2$ A/ μ s
THERMAL				
T_{stg}	Storage temperature	$^{\circ}$ C	-60...+50	
T_j	Operating junction temperature	$^{\circ}$ C	-60...+125	
MECHANICAL				
F	Mounting force	kN	24.0...28.0	
a	Acceleration	m/s ²	50	Device clamped

CHARACTERISTICS

Symbols and parameters		Units	Values	Conditions	
ON-STATE					
V _{TM}	Peak on-state voltage, max	V	2.50	T _j =25 °C; I _{TM} =1570 A	
V _{T(TO)}	On-state threshold voltage, max	V	1.272	T _j =T _{j max} ;	
r _T	On-state slope resistance, max	mΩ	1.125	0.5 π I _{TAV} < I _T < 1.5 π I _{TAV}	
I _L	Latching current, max	mA	1500	T _j =25 °C; V _D =12 V; Gate pulse: I _G =2 A; t _{GP} =50 μs; di _G /dt≥1 A/μs	
I _H	Holding current, max	mA	300	T _j =25 °C; V _D =12 V; Gate open	
BLOCKING					
I _{DRM} , I _{RRM}	Repetitive peak off-state and Repetitive peak reverse currents, max	mA	200	T _j =T _{j max} ; V _D =V _{DRM} ; V _R =V _{RRM}	
(dv _D /dt) _{crit}	Critical rate of rise of off-state voltage ¹⁾ , min	V/μs	1000, 1600, 2000, 2500	T _j =T _{j max} ; V _D =0.67·V _{DRM} ; Gate open	
TRIGGERING					
V _{GT}	Gate trigger direct voltage, max	V	3.00 2.50 1.50	T _j = T _{j min} T _j =25 °C T _j = T _{j max}	V _D =12 V; I _D =3 A; Direct gate current
I _{GT}	Gate trigger direct current, max	mA	400 250 150	T _j = T _{j min} T _j = 25 °C T _j = T _{j max}	
V _{GD}	Gate non-trigger direct voltage, min	V	0.45	T _j =T _{j max} ; V _D =0.67·V _{DRM} ;	
I _{GD}	Gate non-trigger direct current, min	mA	65.00	Direct gate current	
SWITCHING					
t _{gd}	Delay time, max	μs	3.00	T _j =25 °C; V _D =1500 V; I _{TM} =I _{TAV} ; di/dt=200 A/μs;	
t _{gt}	Turn-on time, max	μs	10.00	Gate pulse: I _G =2 A; V _G =20 V; t _{GP} =50 μs; di _G /dt=2 A/μs	
t _q	Turn-off time ²⁾ , max	μs	800	dv _D /dt=50 V/μs; T _j =T _{j max} ; I _{TM} = I _{TAV} ; di _R /dt=-10 A/μs; V _R =100V; V _D =2000 V	
Q _{rr}	Recovered charge, max	μC	4500	T _j =T _{j max} ; I _{TM} =1000 A;	
t _{rr}	Reverse recovery time, max	μs	60.0	di _R /dt=-5 A/μs;	
I _{rr}	Reverse recovery current, max	A	150	V _R =100 V	

THERMAL					
R _{thjc}	Thermal resistance, junction to case, max	°C/W	0.020	Direct current	Double side cooled
R _{thjc-A}			0.044		Anode side cooled
R _{thjc-K}			0.036		Cathode side cooled
R _{thck}	Thermal resistance, case to heatsink, max	°C/W	0.004	Direct current	
MECHANICAL					
m	Weight, max	g	670		
D _s	Surface creepage distance	mm (inch)	39.55 (1.557)		
D _a	Air strike distance	mm (inch)	25.50 (1.004)		

PART NUMBERING GUIDE							NOTES														
T	853	500	65	A2	B2	N	1) Critical rate of rise of off-state voltage														
1	2	3	4	5	6	7	<table><tr><td>Symbol of Group</td><td>A2</td><td>T1</td><td>P1</td><td>M1</td></tr><tr><td>(dv_D/dt)_{crit}, V/μs</td><td>1000</td><td>1600</td><td>2000</td><td>2500</td></tr></table>					Symbol of Group	A2	T1	P1	M1	(dv _D /dt) _{crit} , V/μs	1000	1600	2000	2500
Symbol of Group	A2	T1	P1	M1																	
(dv _D /dt) _{crit} , V/μs	1000	1600	2000	2500																	
1. Phase Control Thyristor							2) Turn-off time (dv _D /dt=50 V/μs)														
2. Design version							<table><tr><td>Symbol of Group</td><td colspan="4">B2</td></tr><tr><td>t_q, μs</td><td colspan="4">800</td></tr></table>					Symbol of Group	B2				t _q , μs	800			
Symbol of Group	B2																				
t _q , μs	800																				
3. Mean on-state current, A																					
4. Voltage code																					
5. Critical rate of rise of off-state voltage, V/μs																					
6. Turn-off time (dv _D /dt=50 V/μs)																					
7. Ambient conditions: N – normal; T – tropical																					



page 4 of 11

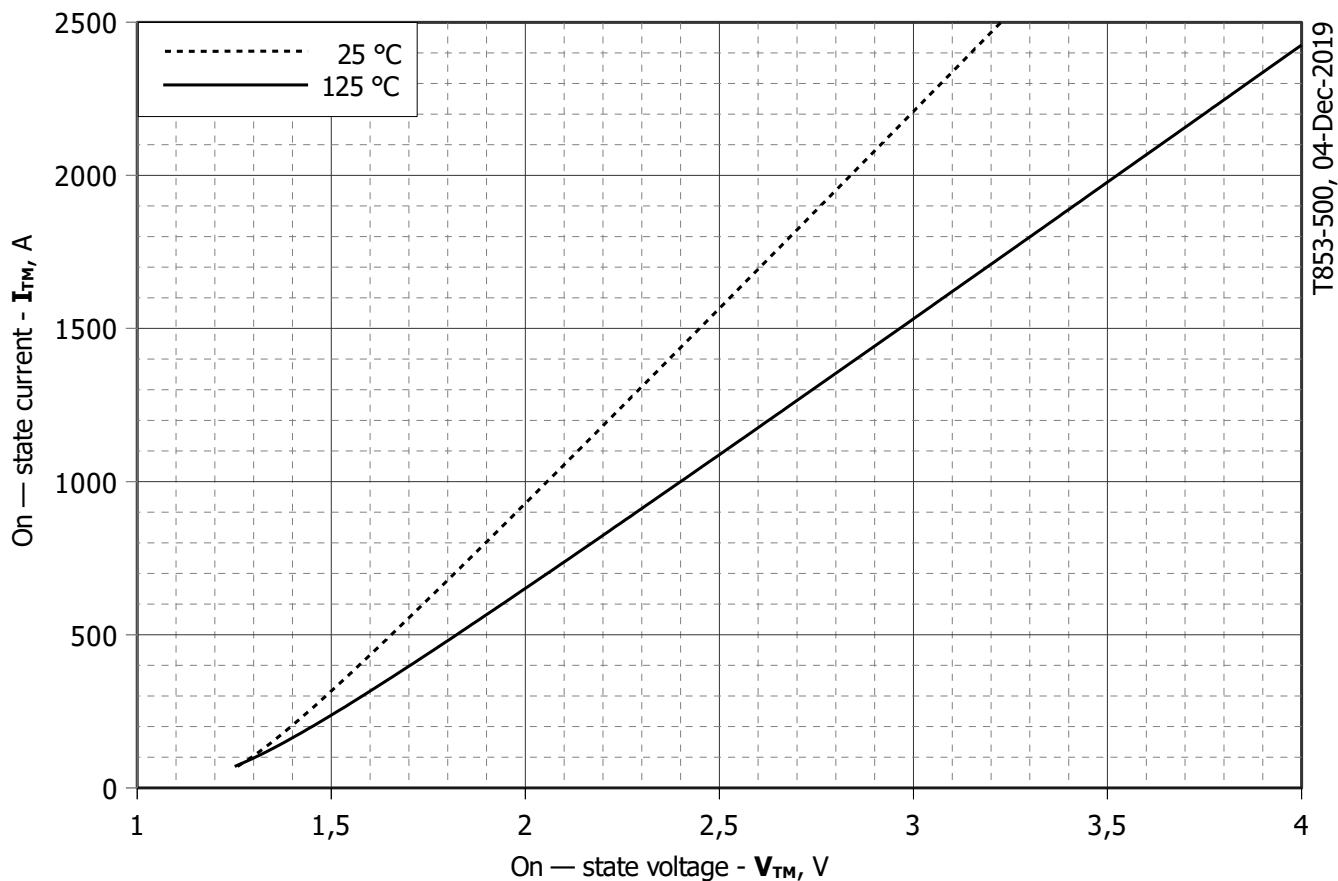


Fig 1 – On-state characteristics of Limit device

Analytical function for On-state characteristic:

$$V_T = A + B \cdot i_T + C \cdot \ln(i_T + 1) + D \cdot \sqrt{i_T}$$

	Coefficients for max curves	
	$T_j = 25^\circ\text{C}$	$T_j = T_{j \max}$
A	1.02180000	0.89838310
B	0.00077615	0.00112210
C	0.04676500	0.07137240
D	-0.00204380	-0.00358350

On-state characteristic model (see Fig. 1)

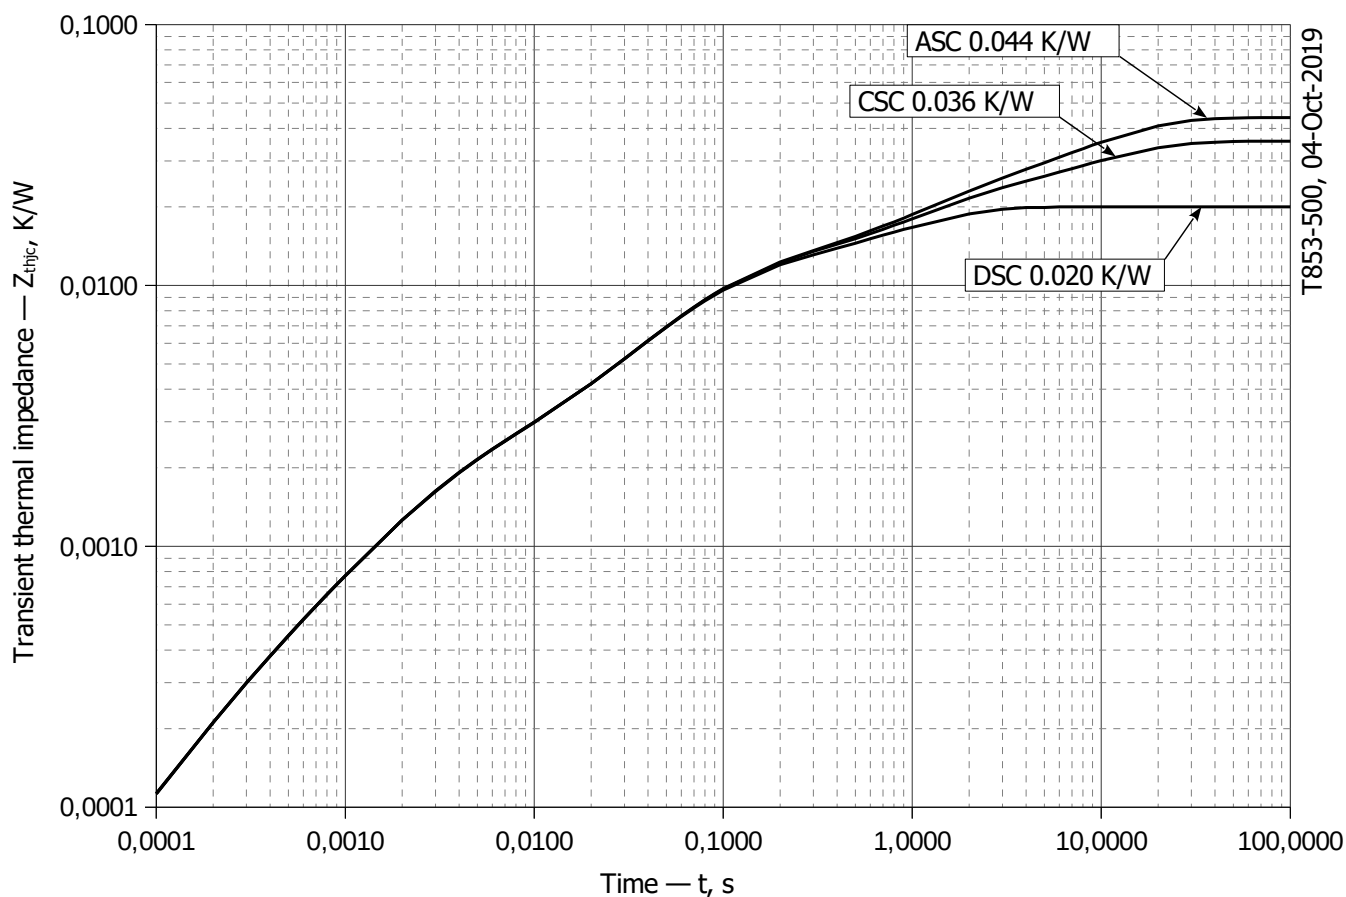


Fig 2 – Transient thermal impedance Z_{thjc} vs. time t

Analytical function for Transient thermal impedance junction to case Z_{thjc} for DC:

$$Z_{thjc} = \sum_{i=1}^n R_i \left(1 - e^{-\frac{t}{\tau_i}} \right)$$

Where $i = 1$ to n , n is the number of terms in the series.

t = Duration of heating pulse in seconds.

Z_{thjc} = Thermal resistance at time t .

R_i = Amplitude of p_{th} term.

τ_i = Time constant of r_{th} term.

DC Double side cooled

i	1	2	3	4	5	6
R_i , K/W	0.009168	0.002899	0.001522	0.006297	0.00003033	0.00008163
τ_i , s	0.9681	0.05144	0.002417	0.07706	0.0004122	0.0002166

DC Anode side cooled

i	1	2	3	4	5	6
R_i , K/W	0.02398	0.009274	0.009094	-0.00003741	0.00155	0.0001282
τ_i , s	9.752	1.065	0.06762	0.01374	0.002533	0.0002841

DC Cathode side cooled

i	1	2	3	4	5	6
R_i , K/W	0.01568	0.00922	0.009098	0.00006319	0.001526	0.000116
τ_i , s	9.755	1.039	0.06857	0.01397	0.002449	0.0002632

Transient thermal impedance junction to case Z_{thjc} model (see Fig. 2)

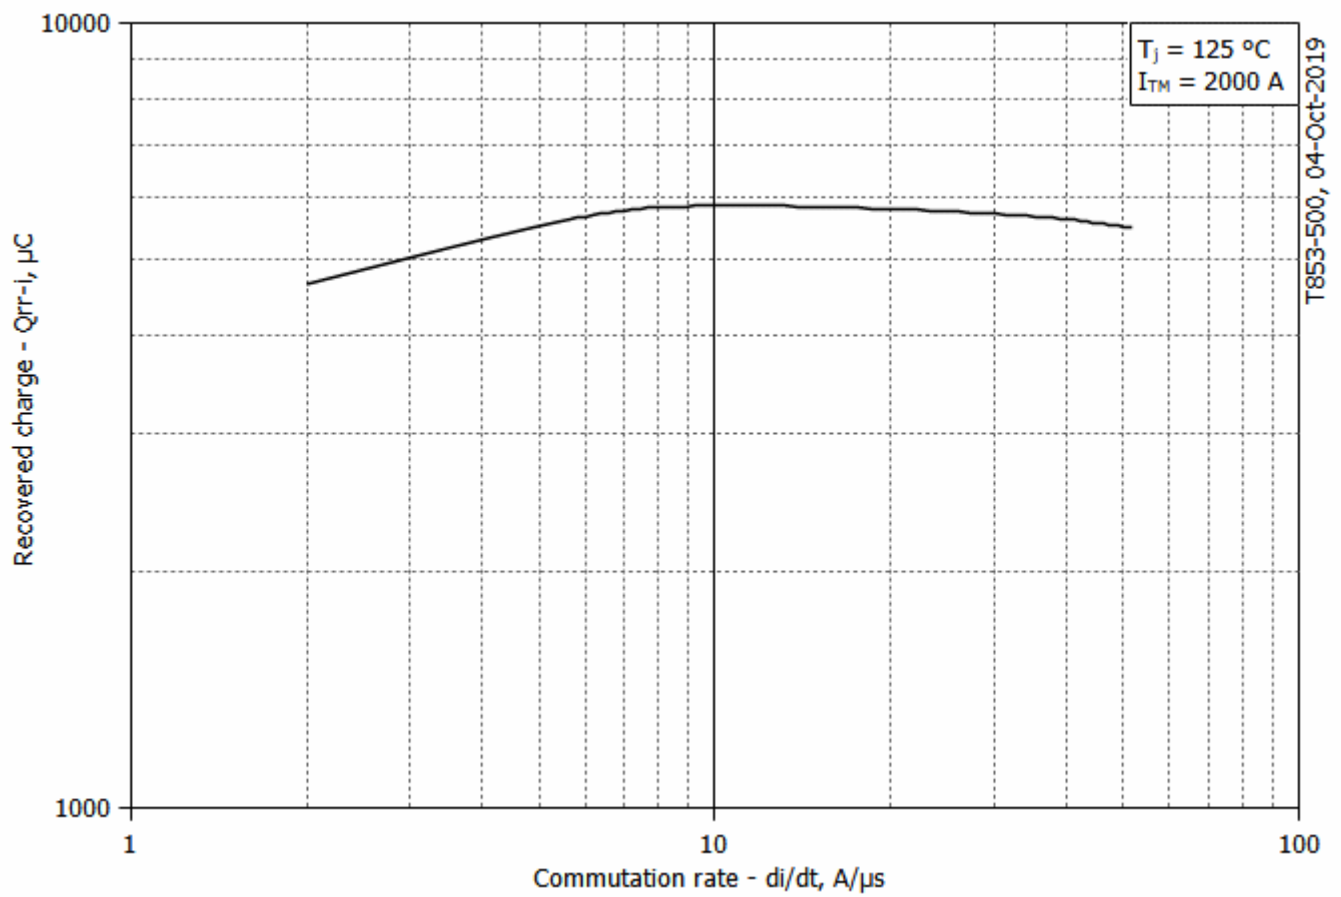


Fig 3 – Maximum recovered charge Q_{rr-i} (integral) vs. commutation rate di_R/dt

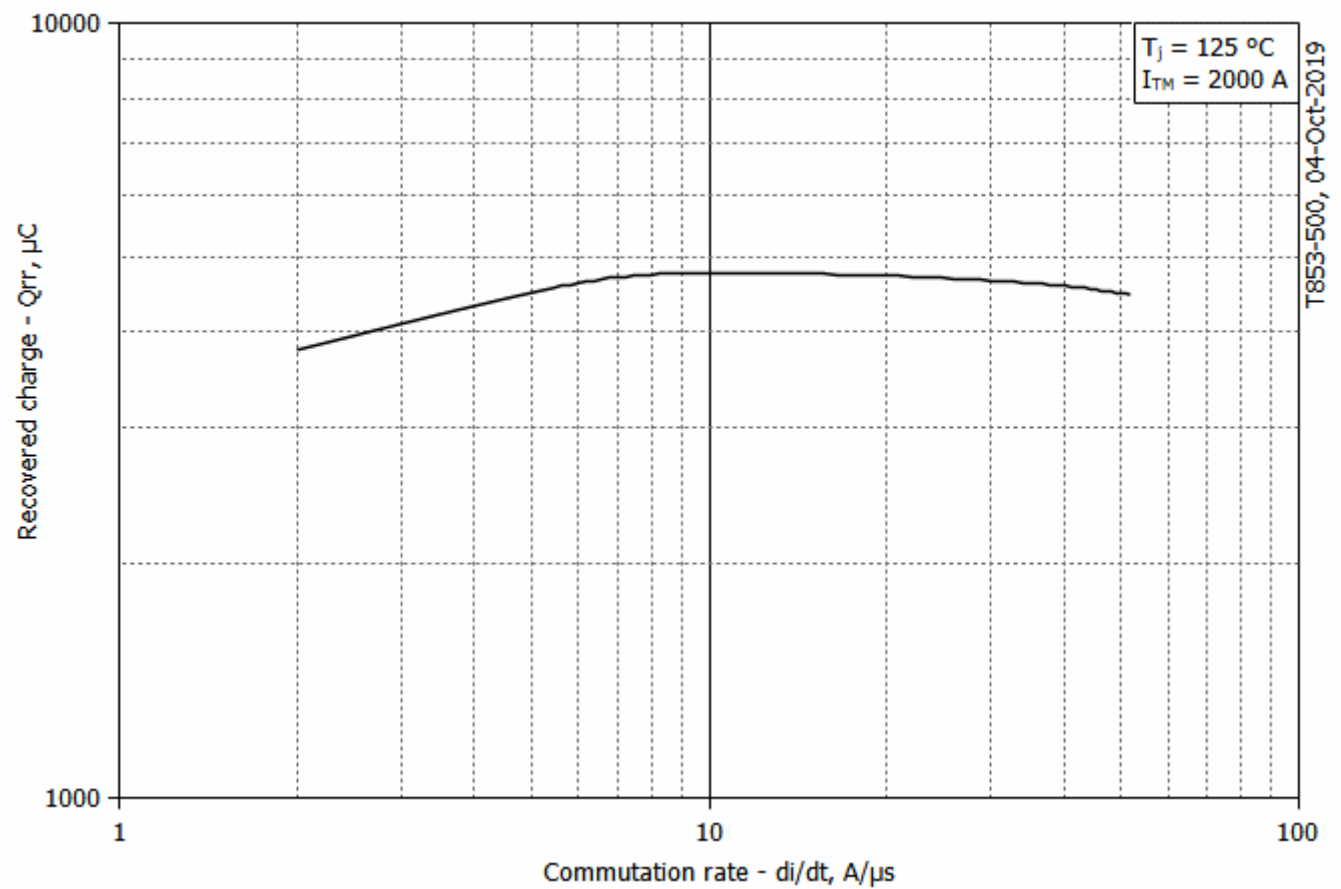


Fig 4 – Maximum recovered charge Q_{rr} vs. commutation rate di_R/dt (25% chord)

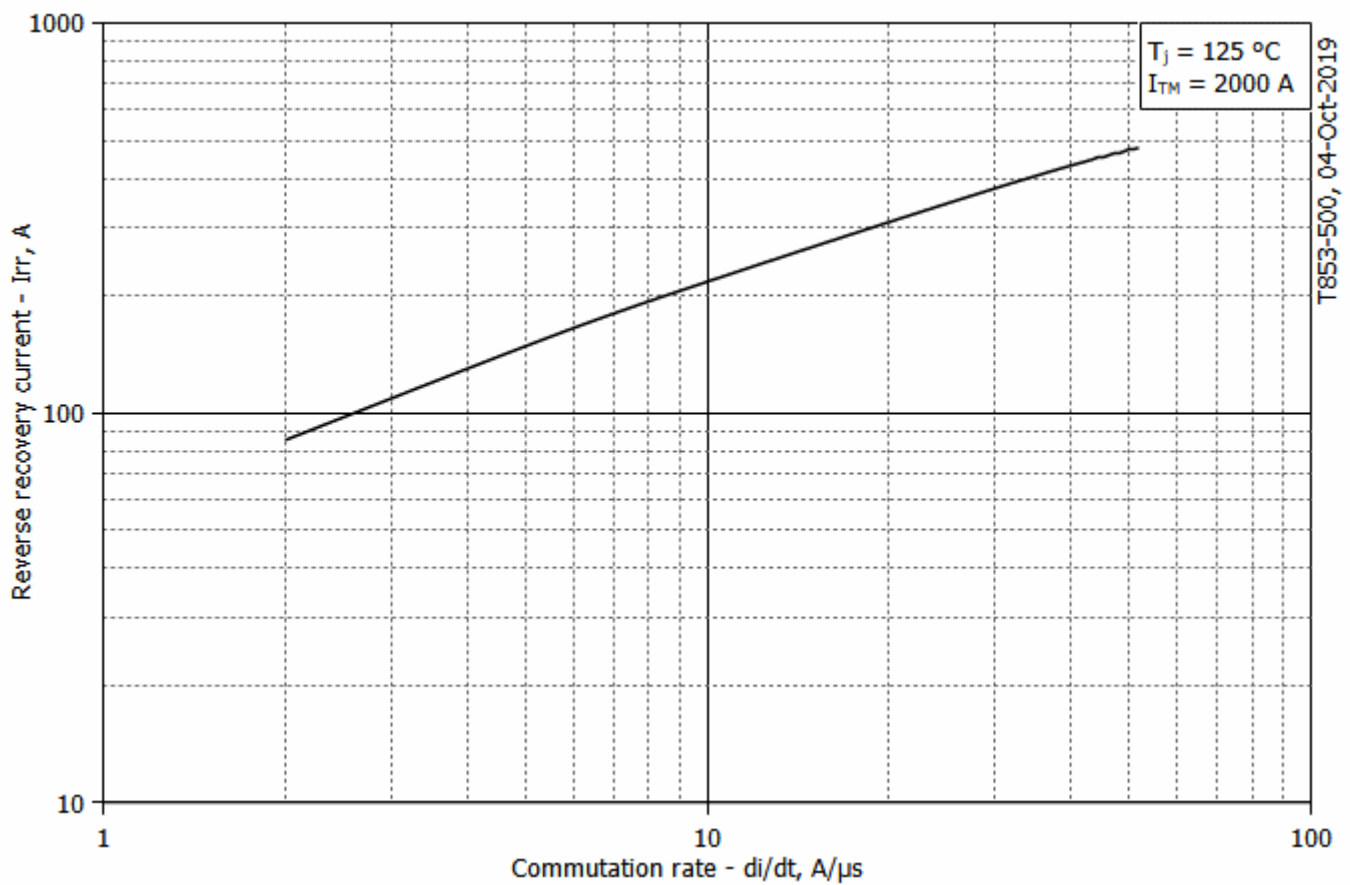


Fig 5 – Maximum reverse recovery current I_{rr} vs. commutation rate di_r/dt



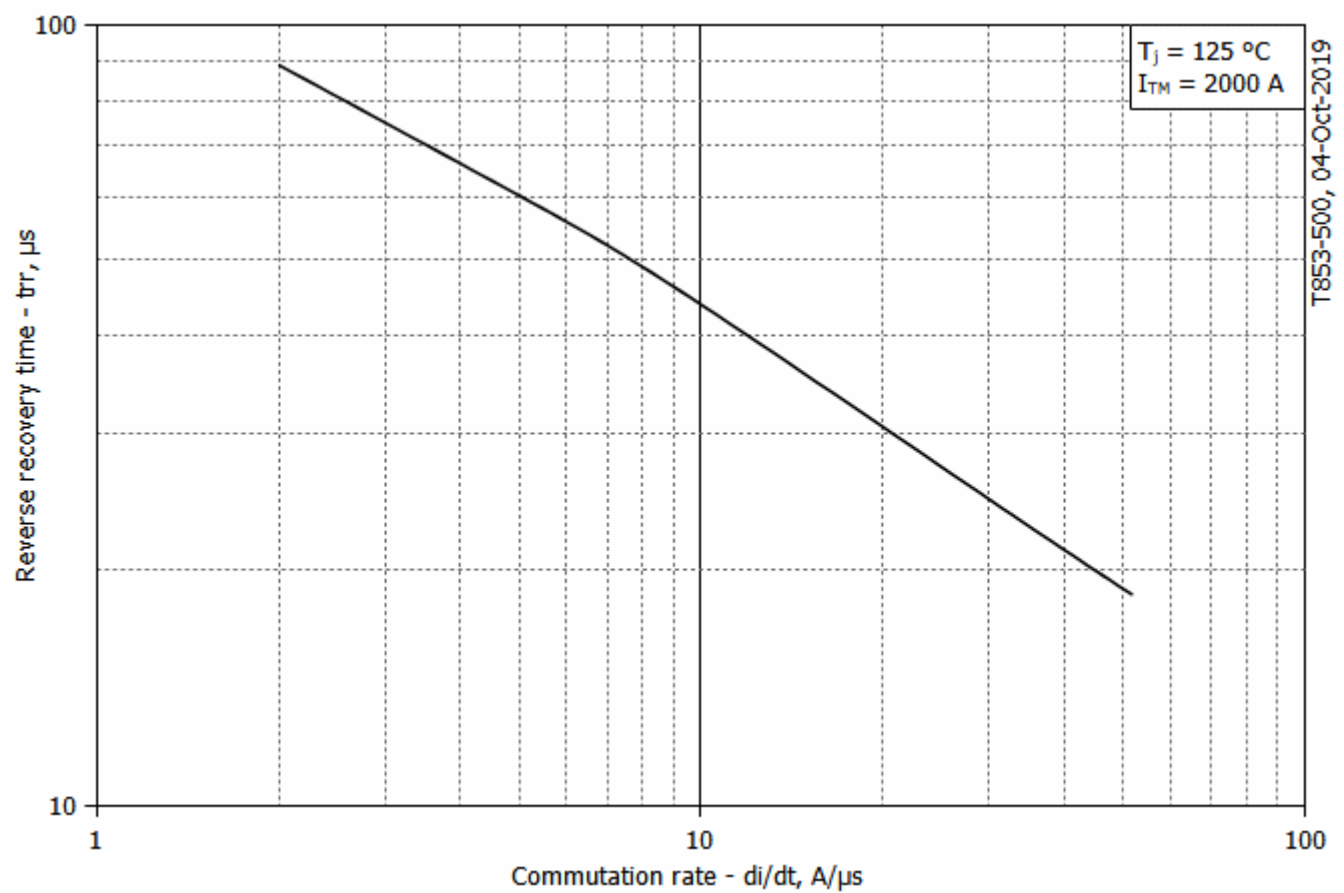


Fig 6 – Maximum recovery time t_{rr} vs. commutation rate di_r/dt (25% chord)

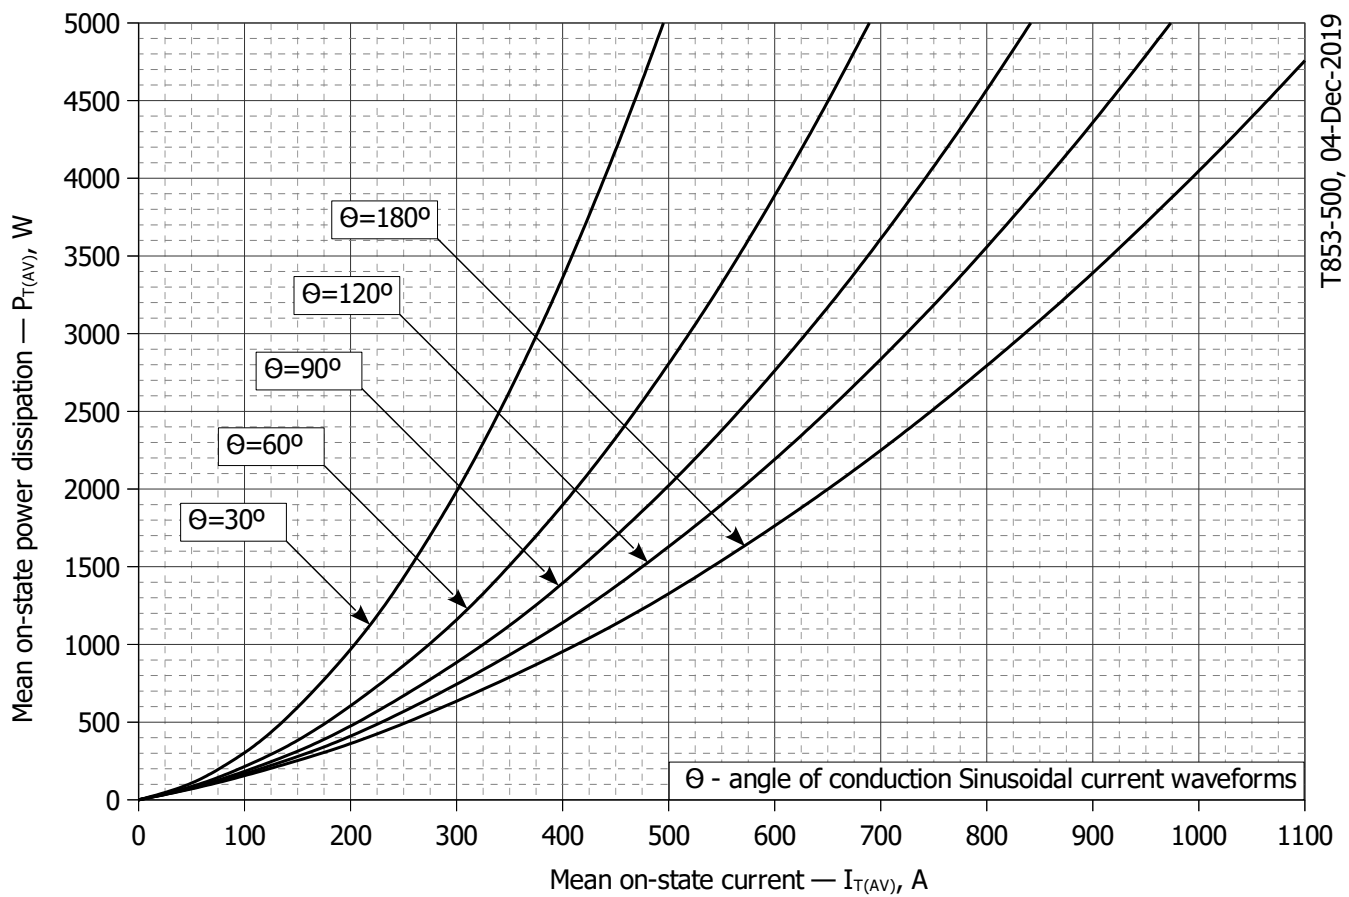


T853-500, 04-Dec-2019

Fig. 7 - Mean on-state power dissipation P_{TAV} vs. mean on-state current I_{TAV} for sinusoidal current waveforms at different conduction angles ($f=50\text{Hz}$, DSC)

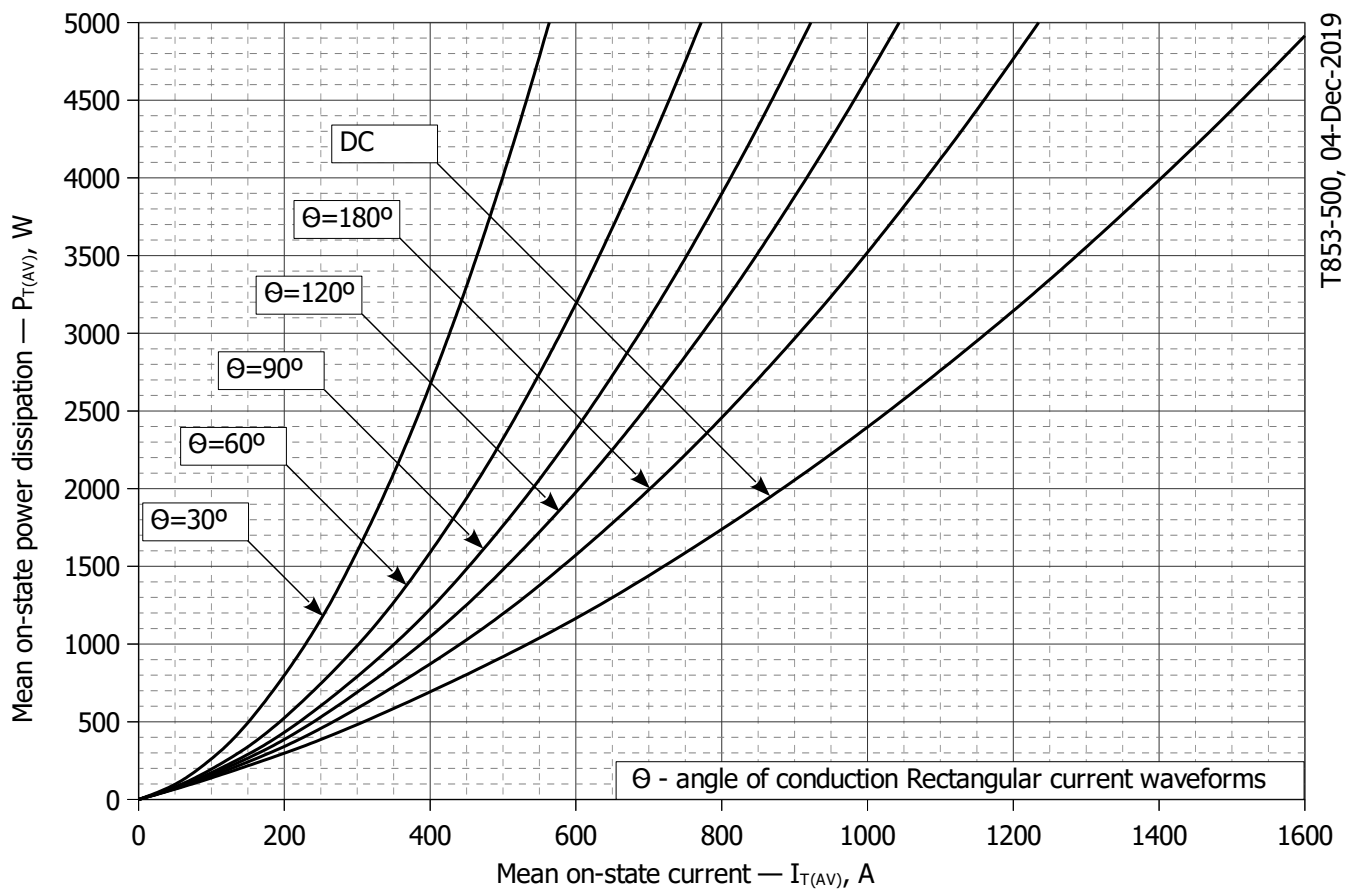


T853-500, 04-Dec-2019

Fig. 8 - Mean on-state power dissipation P_{TAV} vs. mean on-state current I_{TAV} for rectangular current waveforms at different conduction angles and for DC ($f=50\text{Hz}$, DSC)

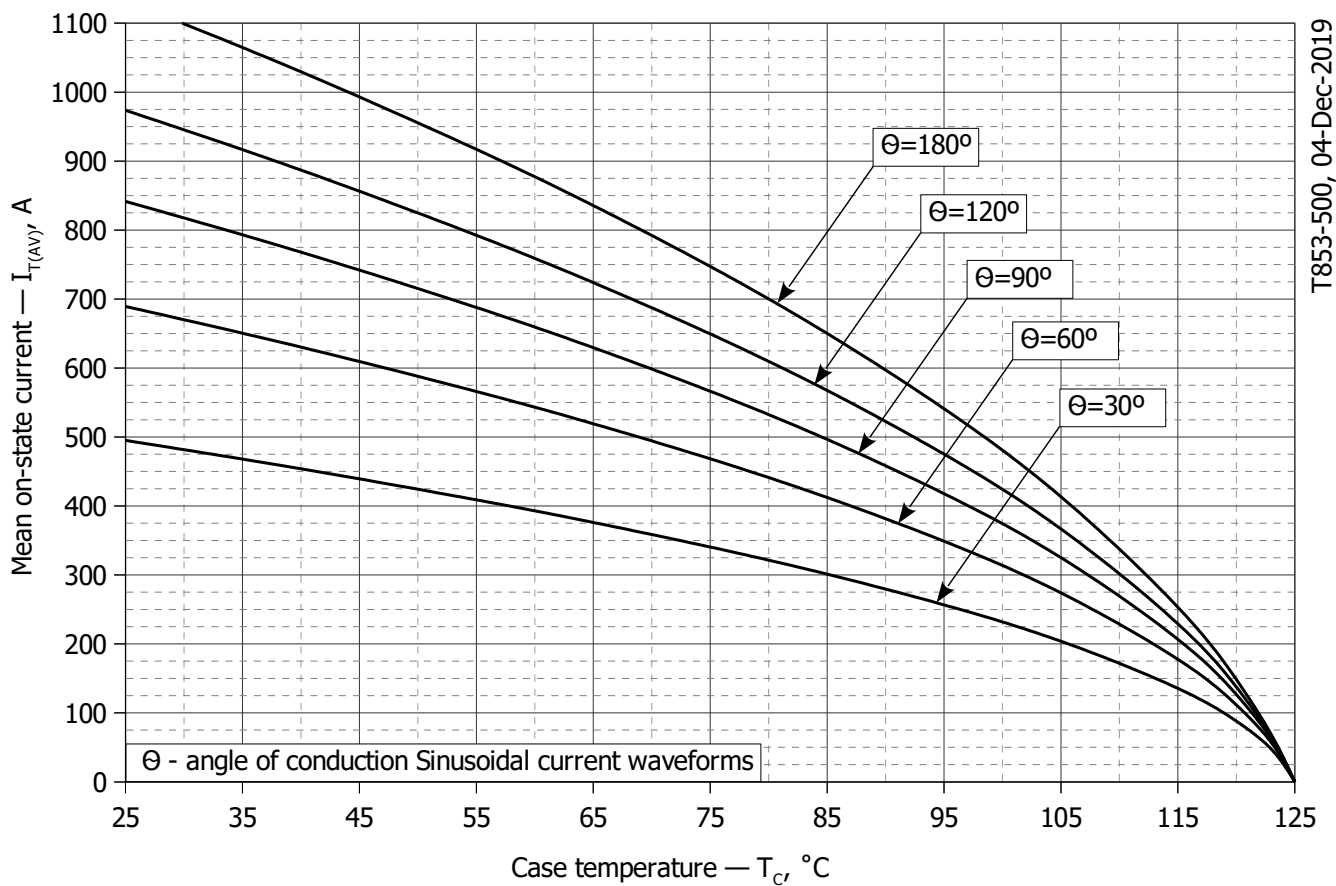

T853-500, 04-Dec-2019

Fig. 9 – Mean on-state current I_{TAV} vs. case temperature T_c for sinusoidal current waveforms at different conduction angles ($f=50\text{Hz}$, DSC)

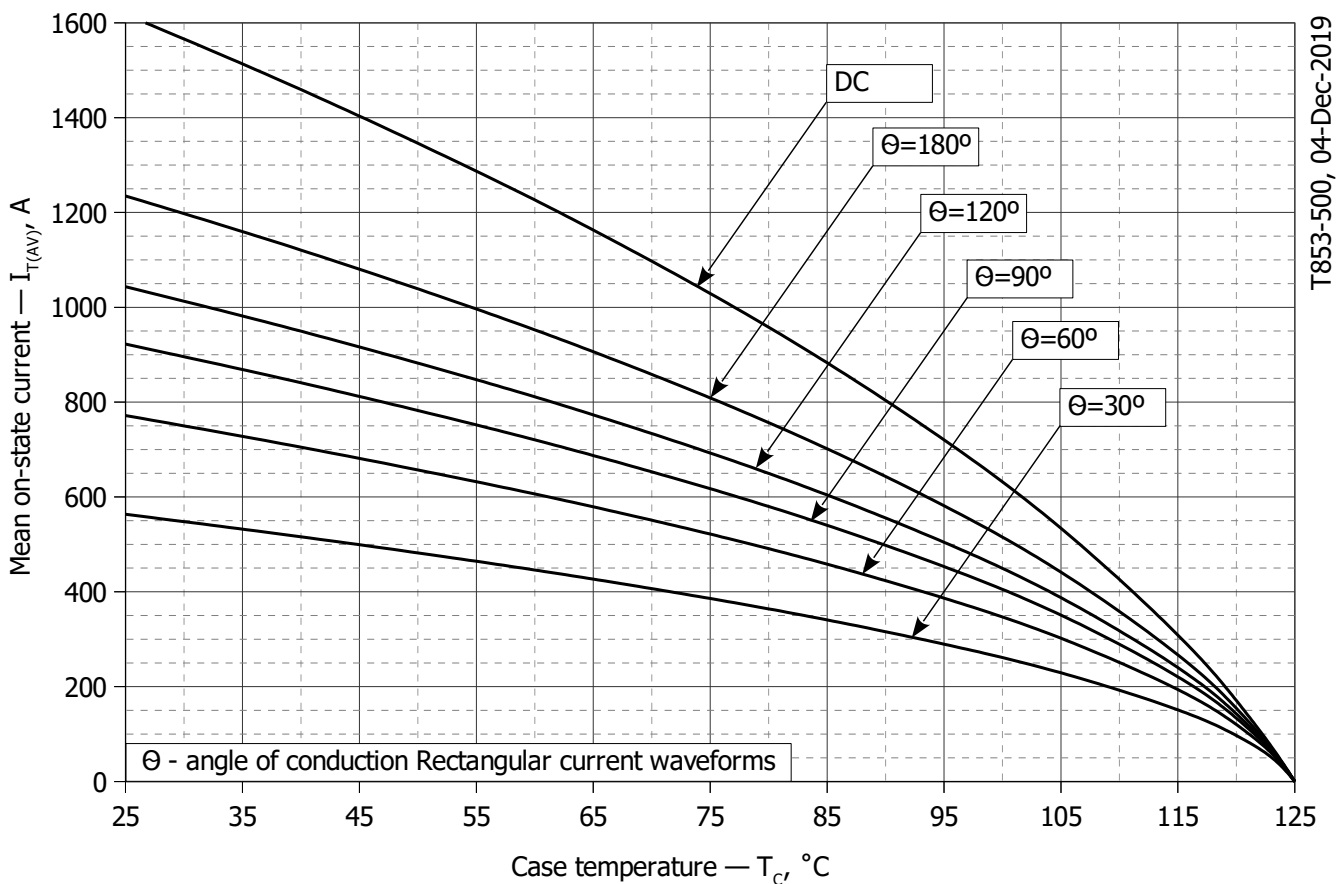

T853-500, 04-Dec-2019

Fig. 10 - Mean on-state current I_{TAV} vs. case temperature T_c for rectangular current waveforms at different conduction angles and for DC ($f=50\text{Hz}$, DSC)

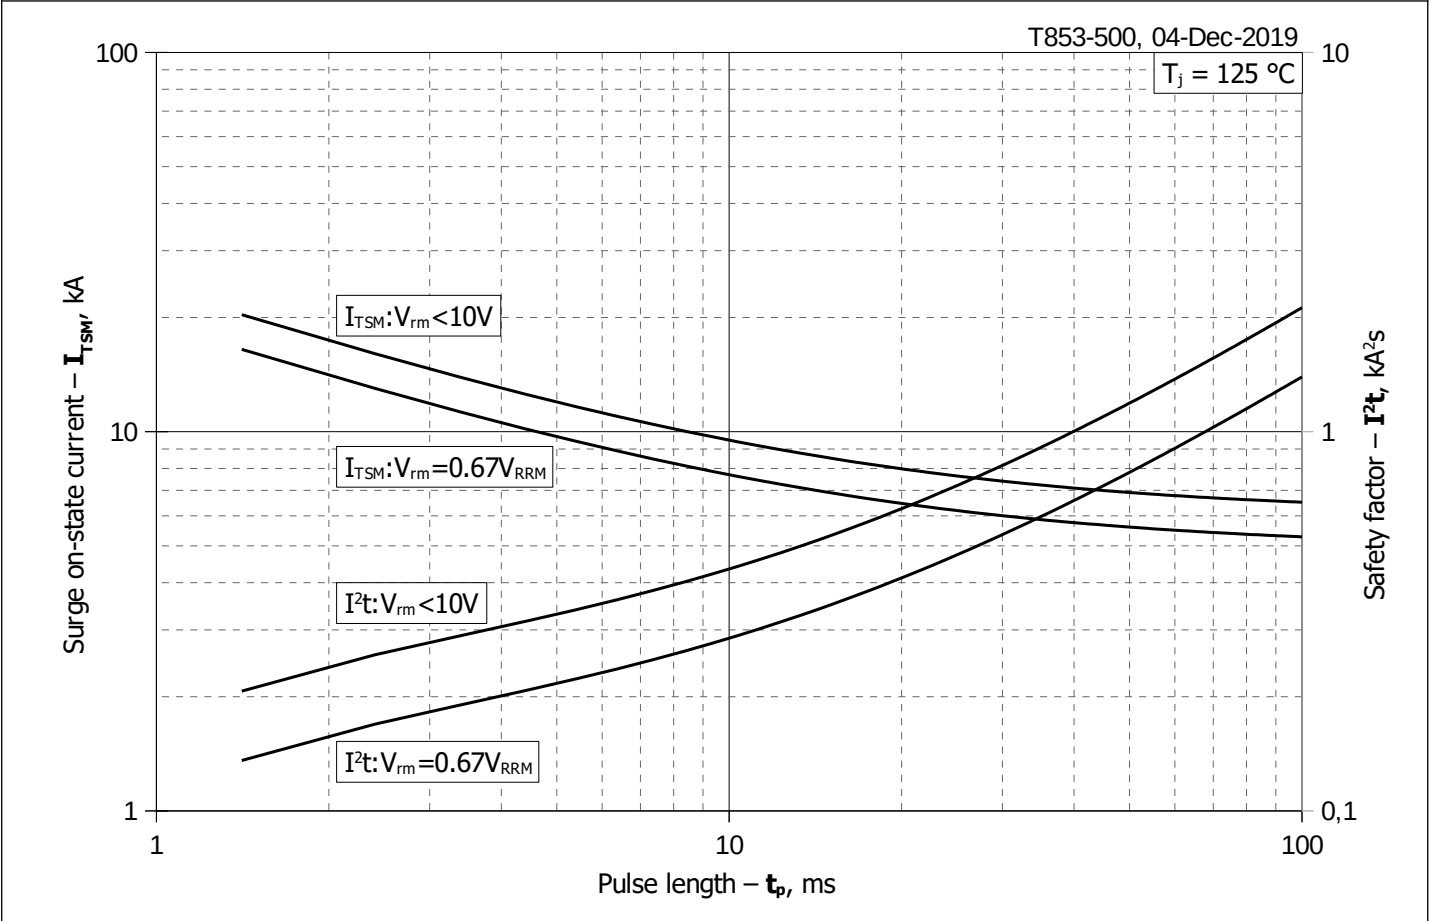


Fig. 11 – Maximum surge on-state current I_{TSM} and safety factor I^2t vs. pulse length t_p

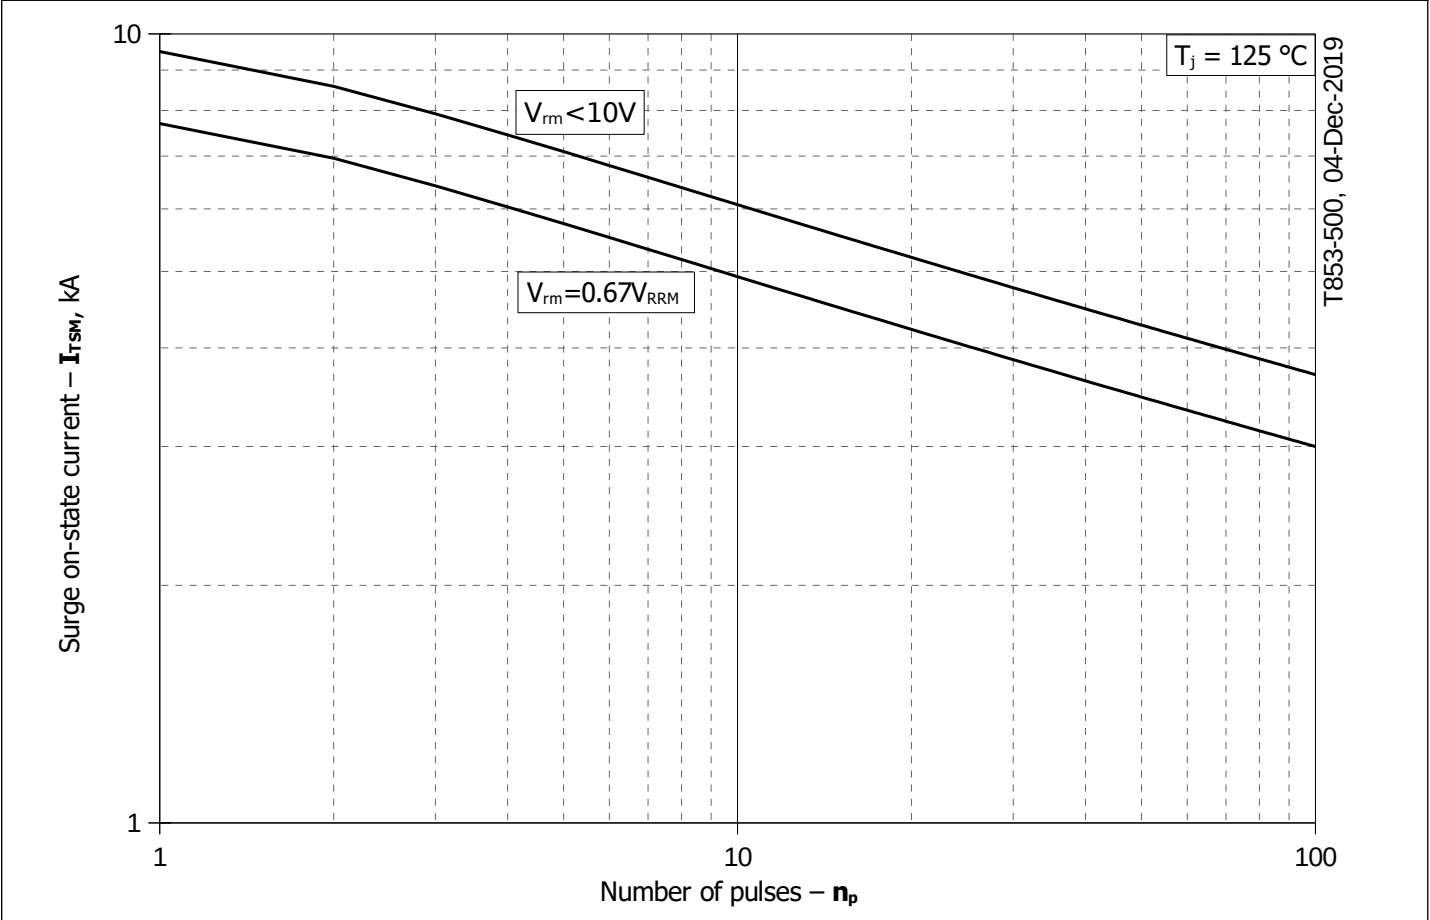


Fig. 12 - Maximum surge on-state current I_{TSM} vs. number of pulses n_p