

STARPOWER

SEMICONDUCTOR

IGBT

GD75MLT60L3SF


600V/75A 3-level and PressFIT

General Description

STARPOWER IGBT Power Module provides ultra low conduction loss as well as short circuit ruggedness. They are designed for the applications such as 3-level-application.

Features


- Low $V_{CE(sat)}$ Trench IGBT technology
- Low switching loss
- 6 μ s short circuit capability
- $V_{CE(sat)}$ with positive temperature coefficient
- Maximum junction temperature 175°C
- Fast & soft reverse recovery anti-parallel FWD
- PressFIT contact technology
- Low inductance case

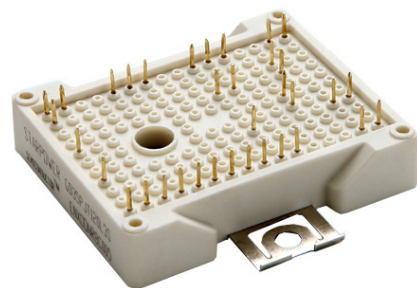

Typical Applications

- Solar power
- UPS
- 3-level-application

Equivalent Circuit Schematic

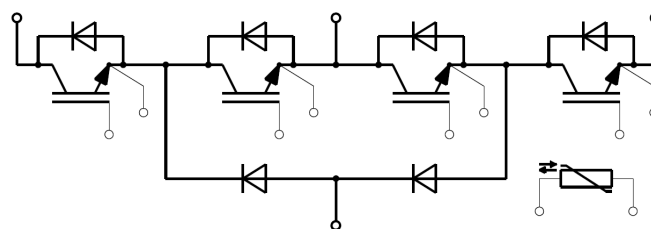

Absolute Maximum Ratings $T_C=25^{\circ}\text{C}$ unless otherwise noted**T1-T4 IGBT**

Symbol	Description	Value	Unit
V_{CES}	Collector-Emitter Voltage	600	V
V_{GES}	Gate-Emitter Voltage	± 20	V
I_C	Collector Current @ $T_C=25^{\circ}\text{C}$ @ $T_C=95^{\circ}\text{C}$	118 75	A
I_{CM}	Pulsed Collector Current $t_p=1\text{ms}$	150	A
P_D	Maximum Power Dissipation @ $T_j=175^{\circ}\text{C}$	331	W

D1-D4 Diode

Symbol	Description	Value	Unit
V_{RRM}	Repetitive Peak Reverse Voltage	600	V
I_F	Diode Continuous Forward Current	75	A
I_{FM}	Diode Maximum Forward Current $t_p=1\text{ms}$	150	A

D5,D6 Diode

Symbol	Description	Value	Unit
V_{RRM}	Repetitive Peak Reverse Voltage	600	V
I_F	Diode Continuous Forward Current	75	A
I_{FM}	Diode Maximum Forward Current $t_p=1\text{ms}$	150	A

Module

Symbol	Description	Value	Unit
T_{jmax}	Maximum Junction Temperature	175	$^{\circ}\text{C}$
T_{jop}	Operating Junction Temperature	-40 to +150	$^{\circ}\text{C}$
T_{STG}	Storage Temperature Range	-40 to +125	$^{\circ}\text{C}$
V_{ISO}	Isolation Voltage RMS, $f=50\text{Hz}$, $t=1\text{min}$	2500	V

T1-T4 IGBT Characteristics $T_C=25^{\circ}\text{C}$ unless otherwise noted

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_{CE(sat)}$	Collector to Emitter Saturation Voltage	$I_C=75\text{A}, V_{GE}=15\text{V}, T_j=25^{\circ}\text{C}$		1.45	1.90	V
		$I_C=75\text{A}, V_{GE}=15\text{V}, T_j=125^{\circ}\text{C}$		1.60		
		$I_C=75\text{A}, V_{GE}=15\text{V}, T_j=150^{\circ}\text{C}$		1.70		
$V_{GE(th)}$	Gate-Emitter Threshold Voltage	$I_C=1.2\text{mA}, V_{CE}=V_{GE}, T_j=25^{\circ}\text{C}$	5.1	5.8	6.4	V
I_{CES}	Collector Cut-Off Current	$V_{CE}=V_{CES}, V_{GE}=0\text{V}, T_j=25^{\circ}\text{C}$			1.0	mA
I_{GES}	Gate-Emitter Leakage Current	$V_{GE}=V_{GES}, V_{CE}=0\text{V}, T_j=25^{\circ}\text{C}$			400	nA
R_{Gint}	Internal Gate Resistance			0		Ω
C_{ies}	Input Capacitance	$V_{CE}=25\text{V}, f=1\text{MHz}, V_{GE}=0\text{V}$		4.62		nF
C_{res}	Reverse Transfer Capacitance			0.14		nF
Q_G	Gate Charge	$V_{GE}=-15 \dots +15\text{V}$		0.80		μC
$t_{d(on)}$	Turn-On Delay Time	$V_{CC}=300\text{V}, I_C=75\text{A}, R_G=5.1\Omega, V_{GE}=\pm 15\text{V}, T_j=25^{\circ}\text{C}$		24		ns
t_r	Rise Time			20		ns
$t_{d(off)}$	Turn-Off Delay Time			198		ns
t_f	Fall Time			84		ns
E_{on}	Turn-On Switching Loss			0.46		mJ
E_{off}	Turn-Off Switching Loss			1.68		mJ
$t_{d(on)}$	Turn-On Delay Time	$V_{CC}=300\text{V}, I_C=75\text{A}, R_G=5.1\Omega, V_{GE}=\pm 15\text{V}, T_j=125^{\circ}\text{C}$		25		ns
t_r	Rise Time			23		ns
$t_{d(off)}$	Turn-Off Delay Time			223		ns
t_f	Fall Time			122		ns
E_{on}	Turn-On Switching Loss			0.61		mJ
E_{off}	Turn-Off Switching Loss			2.31		mJ
$t_{d(on)}$	Turn-On Delay Time	$V_{CC}=300\text{V}, I_C=75\text{A}, R_G=5.1\Omega, V_{GE}=\pm 15\text{V}, T_j=150^{\circ}\text{C}$		25		ns
t_r	Rise Time			24		ns
$t_{d(off)}$	Turn-Off Delay Time			232		ns
t_f	Fall Time			138		ns
E_{on}	Turn-On Switching Loss			0.70		mJ
E_{off}	Turn-Off Switching Loss			2.40		mJ
I_{SC}	SC Data	$t_p \leq 6\mu\text{s}, V_{GE}=15\text{V}, T_j=150^{\circ}\text{C}, V_{CC}=360\text{V}, V_{CEM} \leq 600\text{V}$		380		A

D1-D4 Diode Characteristics $T_C=25^{\circ}\text{C}$ unless otherwise noted

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_F	Diode Forward Voltage	$I_F=75\text{A}, V_{GE}=0\text{V}, T_j=25^{\circ}\text{C}$		1.55	1.95	V
		$I_F=75\text{A}, V_{GE}=0\text{V}, T_j=125^{\circ}\text{C}$		1.50		
		$I_F=75\text{A}, V_{GE}=0\text{V}, T_j=150^{\circ}\text{C}$		1.45		
Q_r	Recovered Charge	$V_R=300\text{V}, I_F=75\text{A},$ $-di/dt=3600\text{A}/\mu\text{s}, V_{GE}=-15\text{V}$ $T_j=25^{\circ}\text{C}$		3.6		μC
I_{RM}	Peak Reverse Recovery Current			96		A
E_{rec}	Reverse Recovery Energy			0.91		mJ
Q_r	Recovered Charge	$V_R=300\text{V}, I_F=75\text{A},$ $-di/dt=3600\text{A}/\mu\text{s}, V_{GE}=-15\text{V}$ $T_j=125^{\circ}\text{C}$		6.5		μC
I_{RM}	Peak Reverse Recovery Current			104		A
E_{rec}	Reverse Recovery Energy			1.52		mJ
Q_r	Recovered Charge	$V_R=300\text{V}, I_F=75\text{A},$ $-di/dt=3600\text{A}/\mu\text{s}, V_{GE}=-15\text{V}$ $T_j=150^{\circ}\text{C}$		7.1		μC
I_{RM}	Peak Reverse Recovery Current			112		A
E_{rec}	Reverse Recovery Energy			1.75		mJ

D5,D6 Diode Characteristics $T_C=25^{\circ}\text{C}$ unless otherwise noted

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_F	Diode Forward Voltage	$I_F=75\text{A}, V_{GE}=0\text{V}, T_j=25^{\circ}\text{C}$		1.45	1.90	V
		$I_F=75\text{A}, V_{GE}=0\text{V}, T_j=125^{\circ}\text{C}$		1.35		
		$I_F=75\text{A}, V_{GE}=0\text{V}, T_j=150^{\circ}\text{C}$		1.30		
Q_r	Recovered Charge	$V_R=300\text{V}, I_F=75\text{A},$ $-di/dt=3100\text{A}/\mu\text{s}, V_{GE}=-15\text{V}$ $T_j=25^{\circ}\text{C}$		3.6		μC
I_{RM}	Peak Reverse Recovery Current			83		A
E_{rec}	Reverse Recovery Energy			0.98		mJ
Q_r	Recovered Charge	$V_R=300\text{V}, I_F=75\text{A},$ $-di/dt=3100\text{A}/\mu\text{s}, V_{GE}=-15\text{V}$ $T_j=125^{\circ}\text{C}$		7.1		μC
I_{RM}	Peak Reverse Recovery Current			101		A
E_{rec}	Reverse Recovery Energy			1.81		mJ
Q_r	Recovered Charge	$V_R=300\text{V}, I_F=75\text{A},$ $-di/dt=3100\text{A}/\mu\text{s}, V_{GE}=-15\text{V}$ $T_j=150^{\circ}\text{C}$		8.0		μC
I_{RM}	Peak Reverse Recovery Current			106		A
E_{rec}	Reverse Recovery Energy			2.05		mJ

NTC Characteristics $T_C=25^{\circ}\text{C}$ unless otherwise noted

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
R_{25}	Rated Resistance			5.0		k Ω
$\Delta R/R$	Deviation of R_{100}	$T_C=100^{\circ}\text{C}, R_{100}=493.3\Omega$	-5		5	%
P_{25}	Power Dissipation				20.0	mW
$B_{25/50}$	B-value	$R_2=R_{25}\exp[B_{25/50}(1/T_2-1/(298.15\text{K}))]$		3375		K

Module Characteristics $T_C=25^{\circ}\text{C}$ unless otherwise noted

Symbol	Parameter	Min.	Typ.	Max.	Unit
L_{CE}	Stray Inductance		15		nH
$R_{CC'+EE'}$	Module Lead Resistance, Terminal to Chip		2.00		m Ω
$R_{\theta JC}$	Junction-to-Case (per T1-T4 IGBT)		0.412	0.453	K/W
	Junction-to-Case (per D1-D4 Diode)		0.716	0.788	
	Junction-to-Case (per D5,D6 Diode)		0.471	0.518	
$R_{\theta CS}$	Case-to-Sink (per T1-T4 IGBT)		0.298		K/W
	Case-to-Sink (per D1-D4 Diode)		0.518		
	Case-to-Sink (per D5,D6 Diode)		0.341		
$R_{\theta CS}$	Case-to-Sink		0.037		K/W
F	Mounting Force Per Clamp	40		80	K/W
G	Weight of Module		39		g

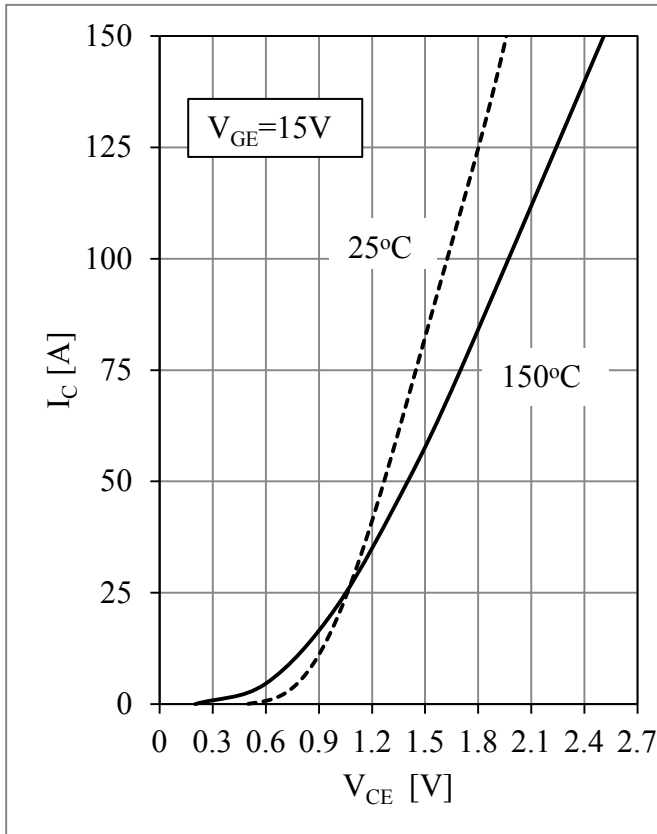


Fig 1. T1-T4 IGBT Output Characteristics

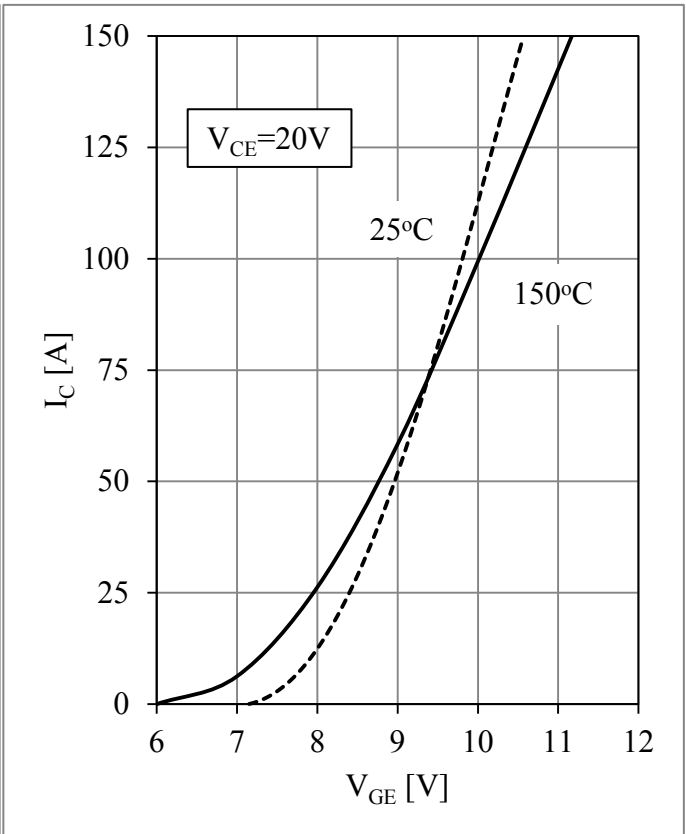
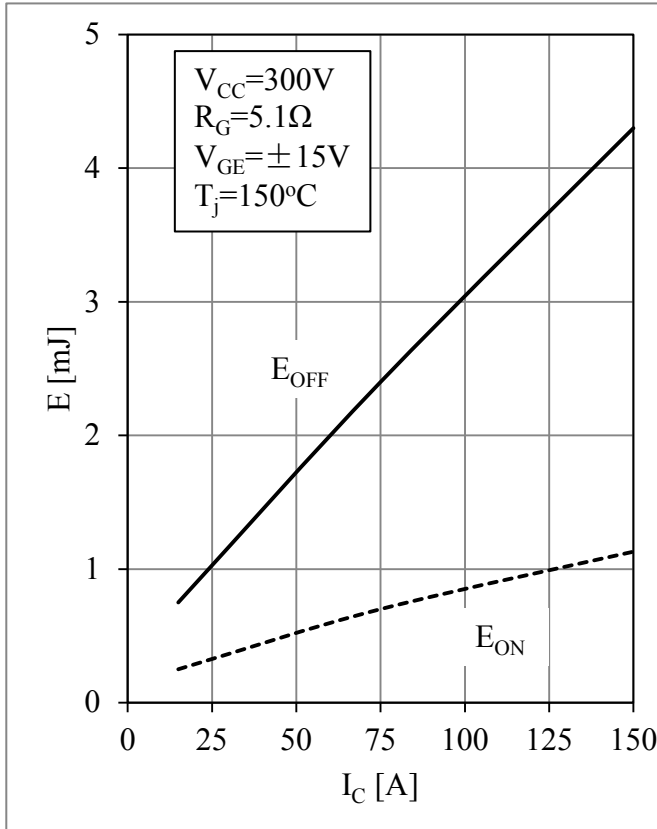
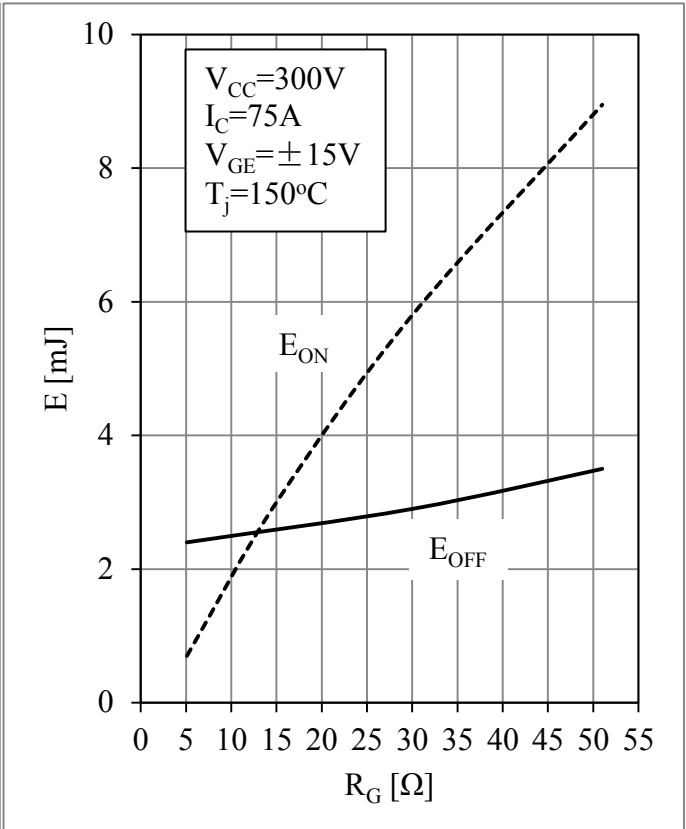


Fig 2. T1-T4 IGBT Transfer Characteristics

Fig 3. T1-T4 IGBT Switching Loss vs. I_C Fig 4. T1-T4 IGBT Switching Loss vs. R_G

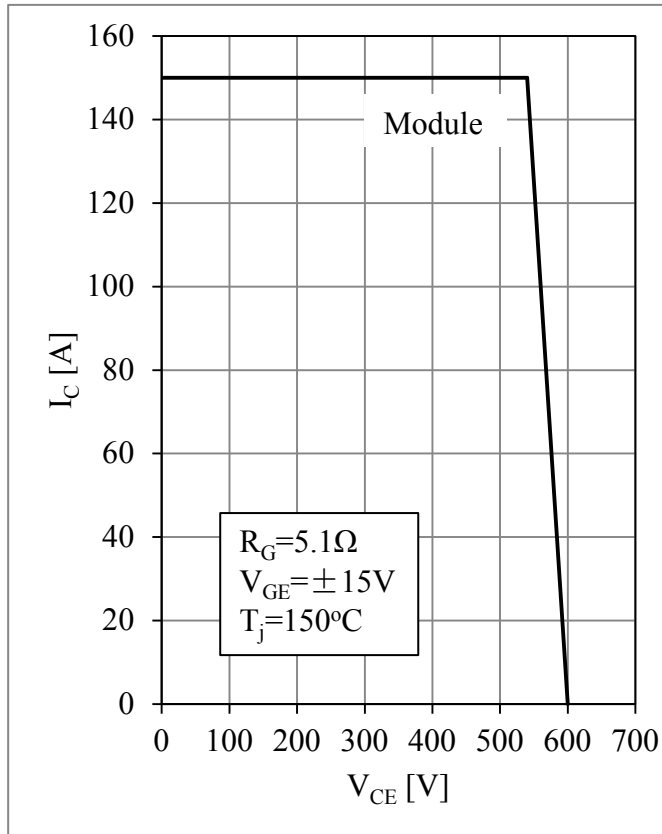


Fig 5. T1-T4 RBSOA

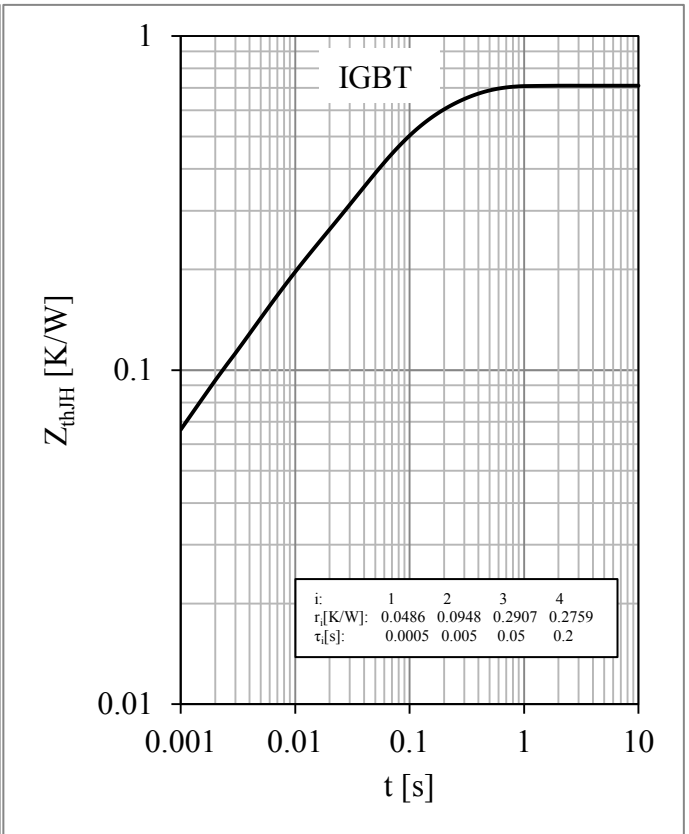


Fig 6. T1-T4 IGBT Transient Thermal Impedance

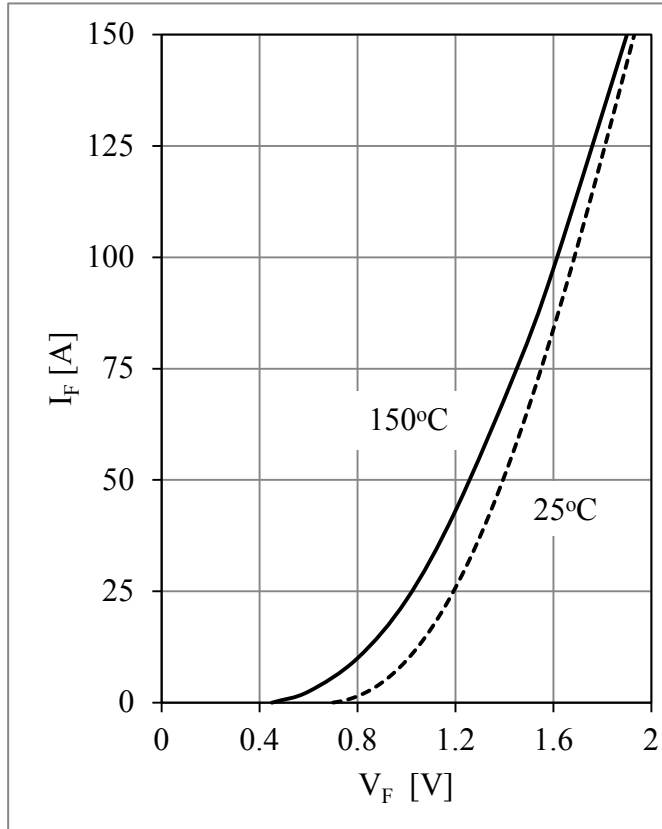
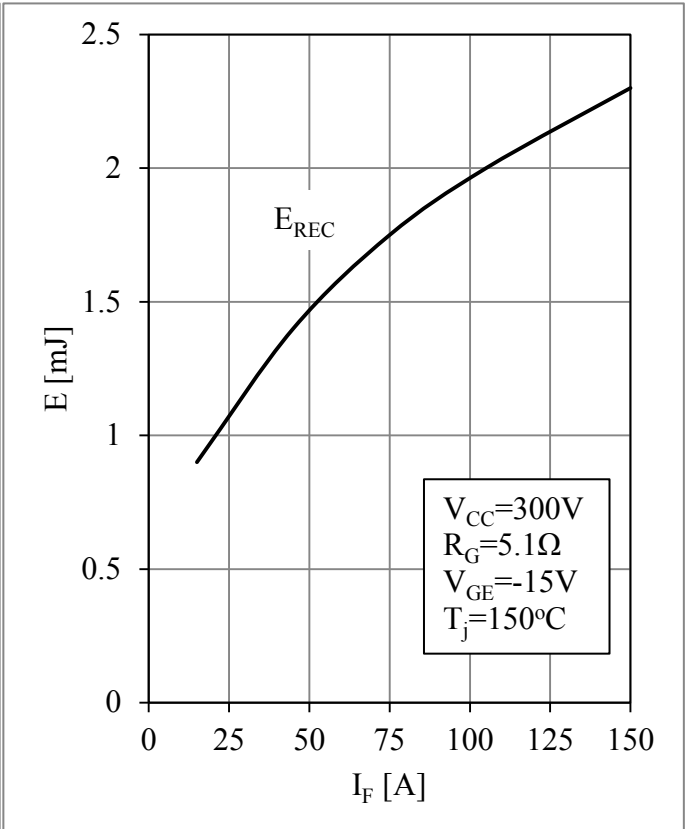


Fig 7. D1-D4 Diode Forward Characteristics

Fig 8. D1-D4 Diode Switching Loss vs. I_F



Fig 9. D1-D4 Diode Switching Loss vs. R_G 

Fig 10. D1-D4 Diode Transient Thermal Impedance









Fig 11. D5,D6 Diode Forward Characteristics

Fig 12. D5,D6 Diode Switching Loss vs. I_F

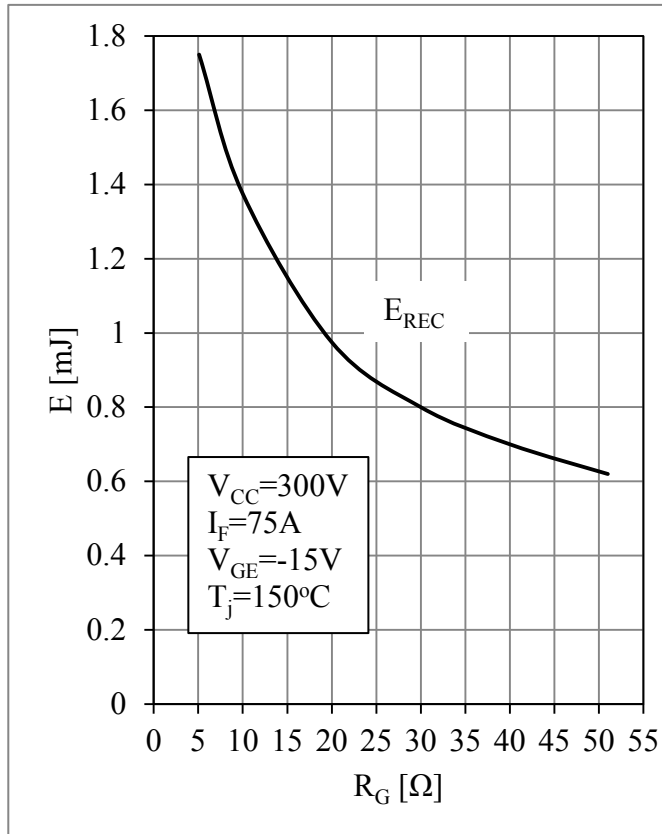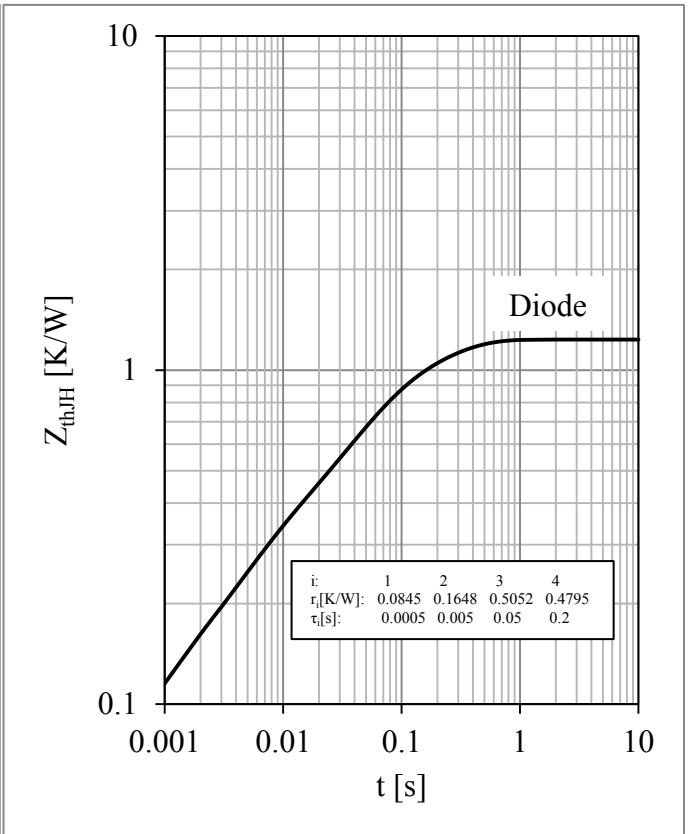


Circuit Schematic

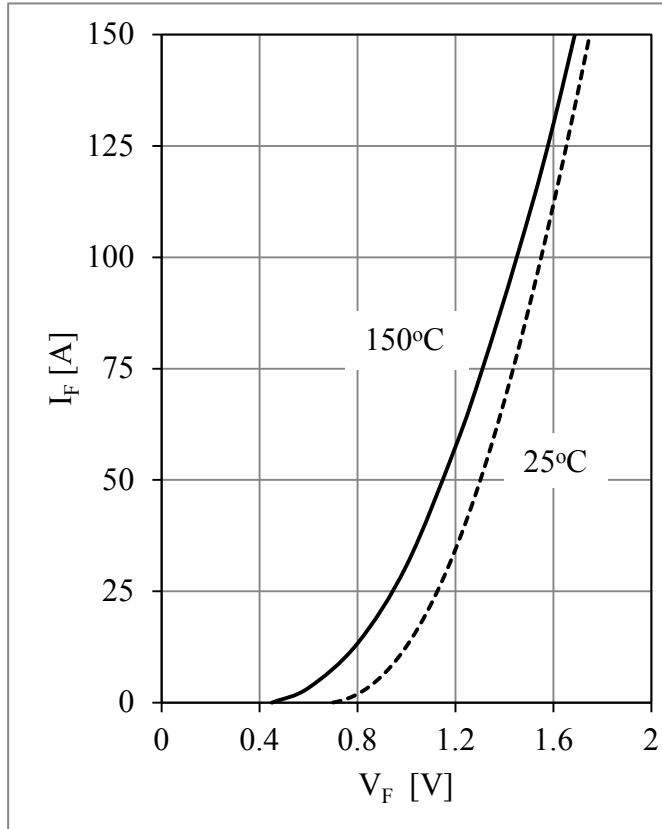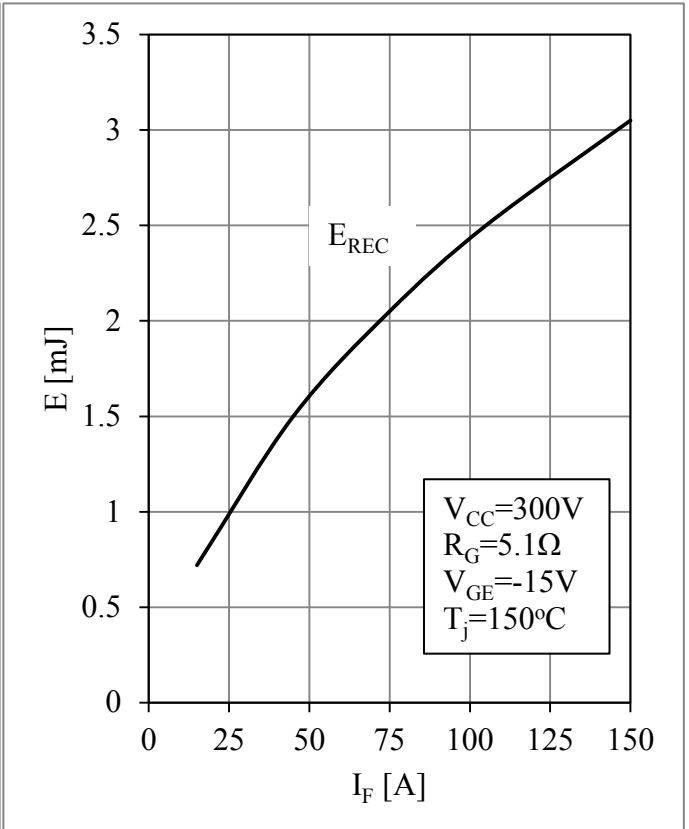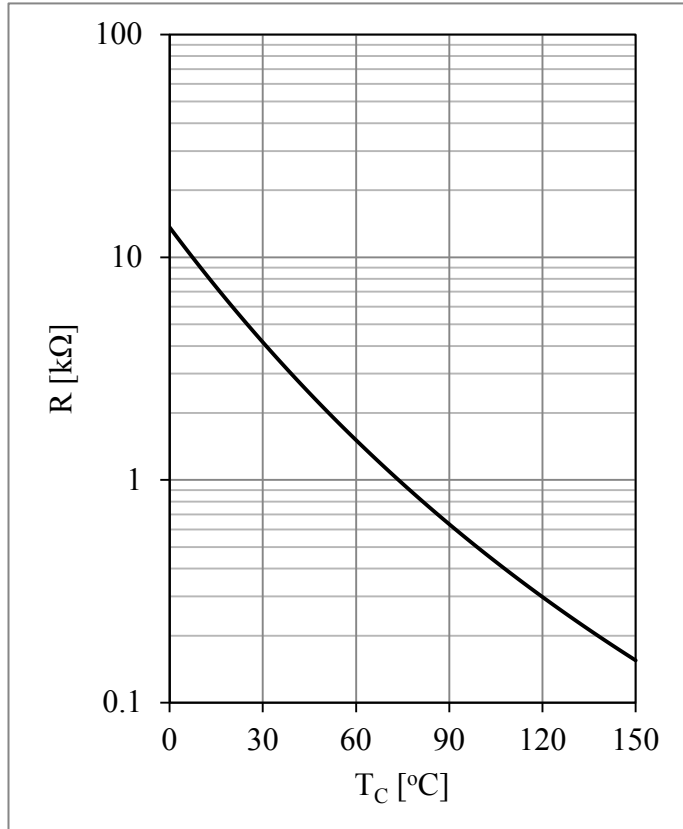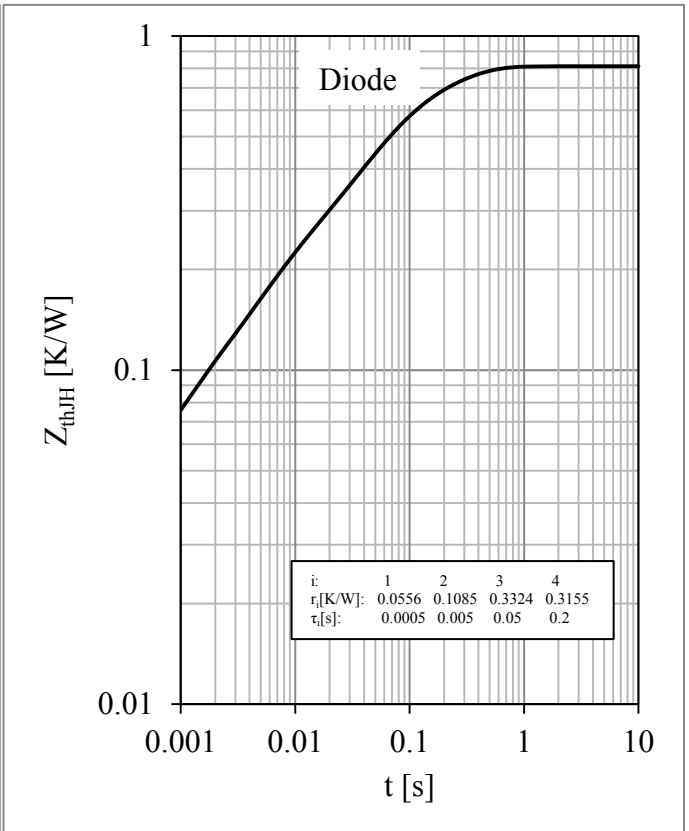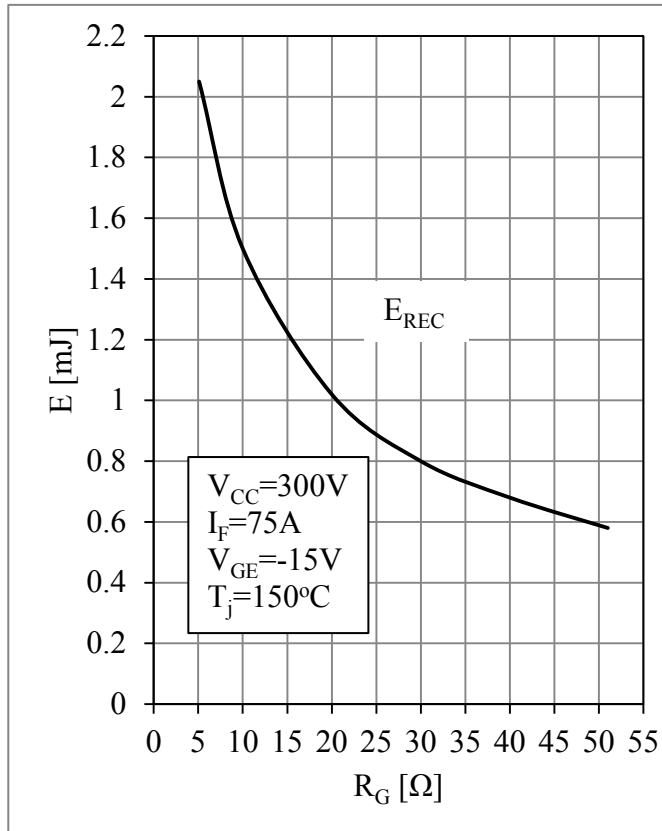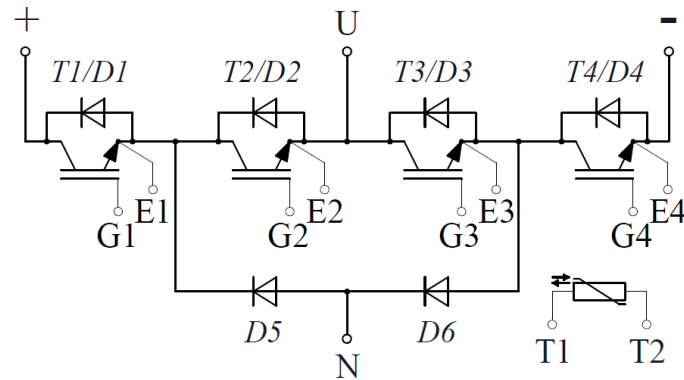

Package Dimensions

Dimensions in Millimeters

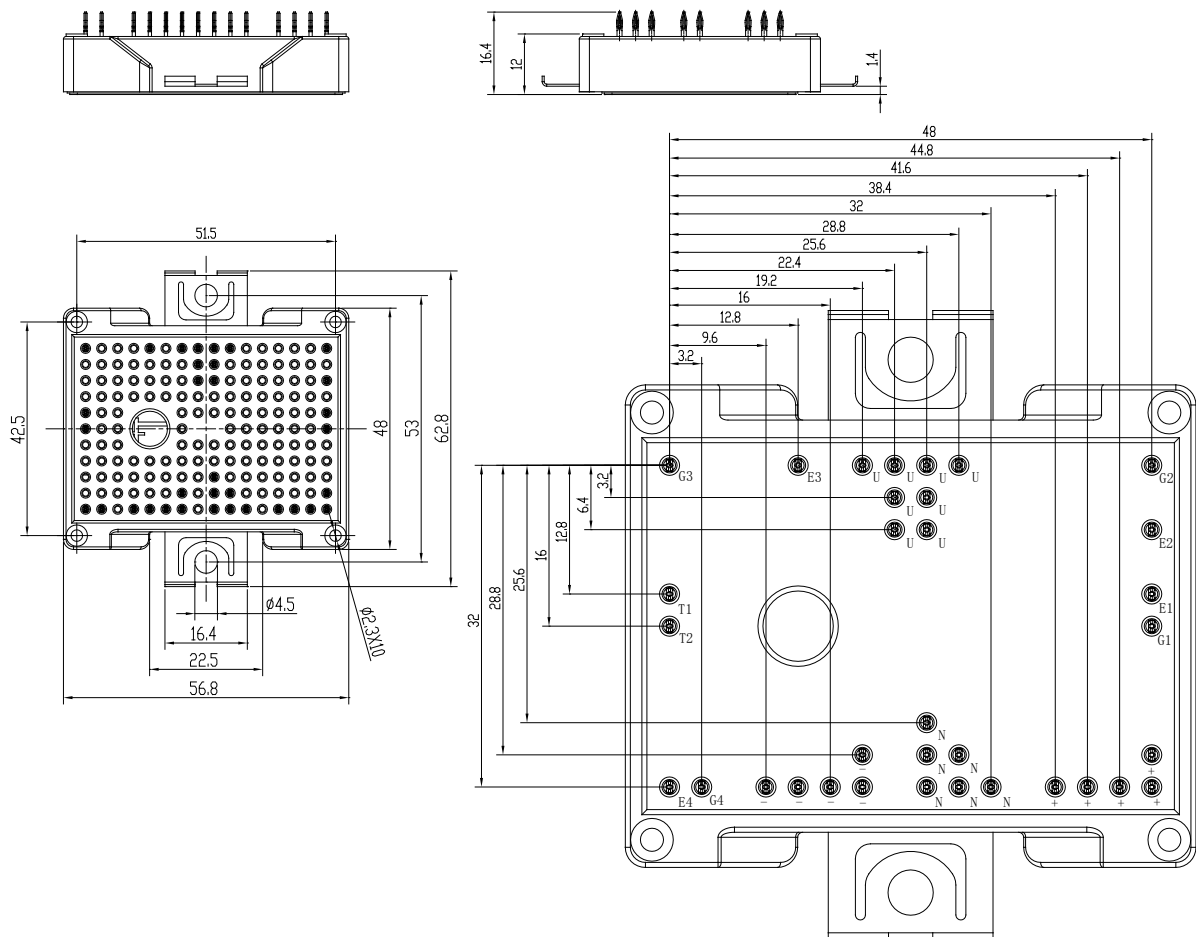

Terms and Conditions of Usage

The data contained in this product datasheet is exclusively intended for technically trained staff. you and your technical departments will have to evaluate the suitability of the product for the intended application and the completeness of the product data with respect to such application.

This product data sheet is describing the characteristics of this product for which a warranty is granted. Any such warranty is granted exclusively pursuant the terms and conditions of the supply agreement. There will be no guarantee of any kind for the product and its characteristics.

Should you require product information in excess of the data given in this product data sheet or which concerns the specific application of our product, please contact the sales office, which is responsible for you (see www.powersemi.cc), For those that are specifically interested we may provide application notes.

Due to technical requirements our product may contain dangerous substances. For information on the types in question please contact the sales office, which is responsible for you.

Should you intend to use the Product in aviation applications, in health or live endangering or life support applications, please notify.

If and to the extent necessary, please forward equivalent notices to your customers.
Changes of this product data sheet are reserved.