

Features

Low forward voltage drop
High reverse voltage
Hermetic metal cases with ceramic insulators

Typical Applications

All purpose high power rectifier diodes
High power resistance welding equipment
Non-controllable and half-controllable rectifiers
Controlled rectifiers

Part No. Y24ZPB-ZT19aT		
$I_{F(AV)}$	**860A**	
V_{RRM}	**200V**	**400V**
	600V	**800V**
	1000V	**1200V**
	1400V	

SYMBOL	CHARACTERISTIC	TEST CONDITIONS		T_j(C)	VALUE			UNIT
					Min	Type	Max	
$I_{F(AV)}$	Mean forward current	180 half sine wave 50Hz Double side cooled,	T_C=85 C	190			860	A
V_{RRM}	Repetitive peak reverse voltage	tp=10ms		190	200		1400	V
I_{RRM}	Repetitive peak current	at V_{RRM}		190			16	mA
I_{FSM}	Surge forward current	10ms half sine wave V_R=0.6V_{RRM}		190			8	kA
I^2t	I^2t for fusing coordination						320	A^2s*10^3
V_{FO}	Threshold voltage			190			0.80	V
r_F	Forward slope resistance						0.34	mΩ
V_{FM}	Peak forward voltage	I_{FM}=600A, F=5.0kN		25			1.80	V
Q_{rr}	Recovery charge	I_{FM}=1000A, tp=4000μs, di/dt=-20A/μs, V_R=100V		190		1400		μC
$R_{th(j-c)}$	Thermal resistance Junction to case	At 180^0 sine double side cooled Clamping force 5.0kN					0.080	C /W
$R_{th(c-h)}$	Thermal resistance case to heat sink						0.020	
F_m	Mounting force				3.3		5.5	kN
T_{vj}	Junction temperature				-40		190	C
T_{stg}	Stored temperature				-40		190	C
W_t	Weight					60		g
Outline	ZT19aT							

TECHSEM

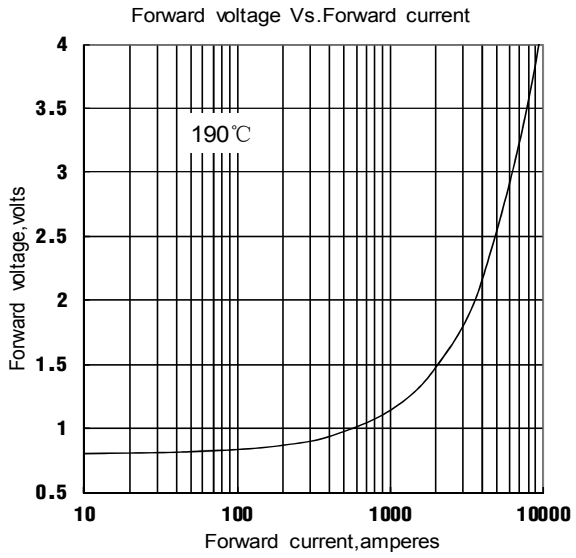


Fig1

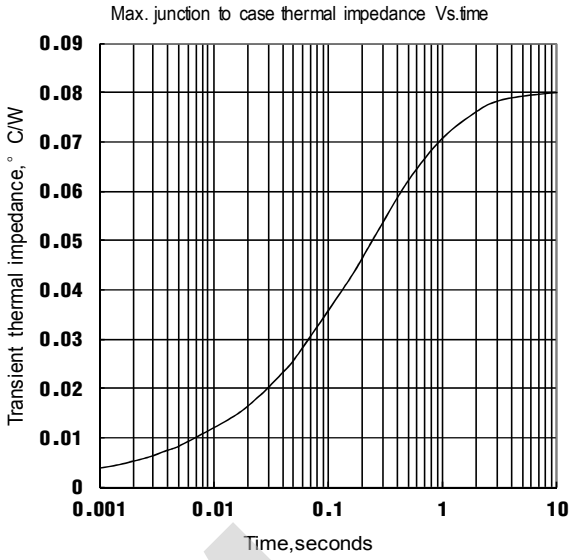


Fig2

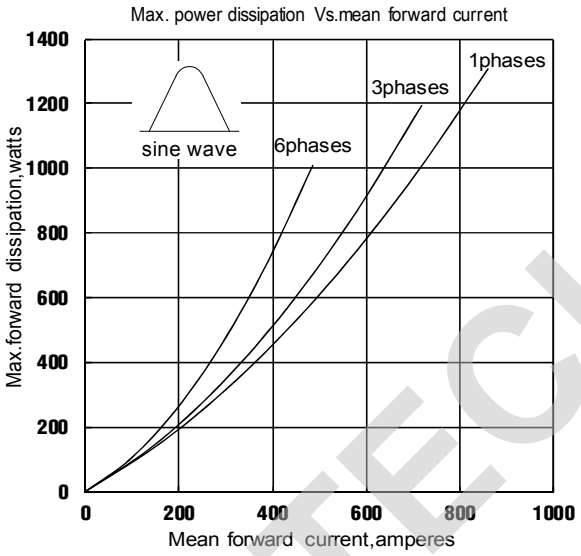


Fig3

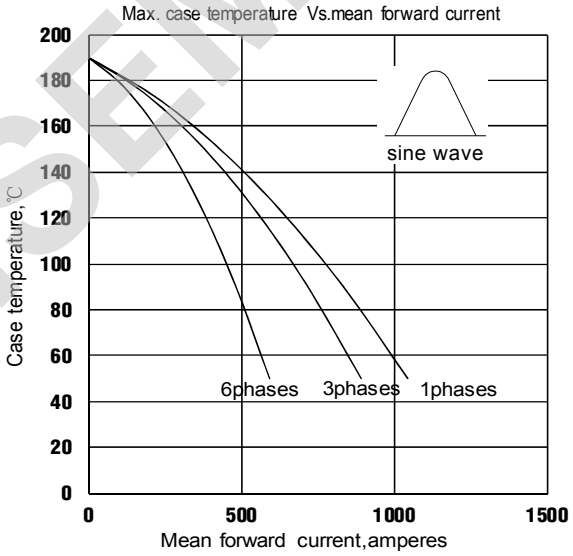


Fig4

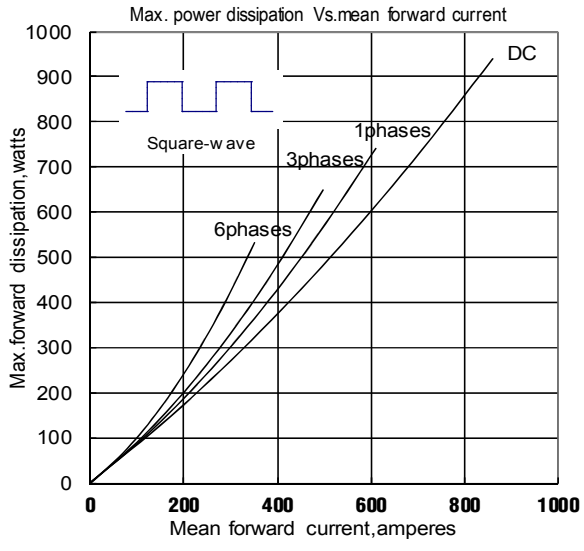


Fig5

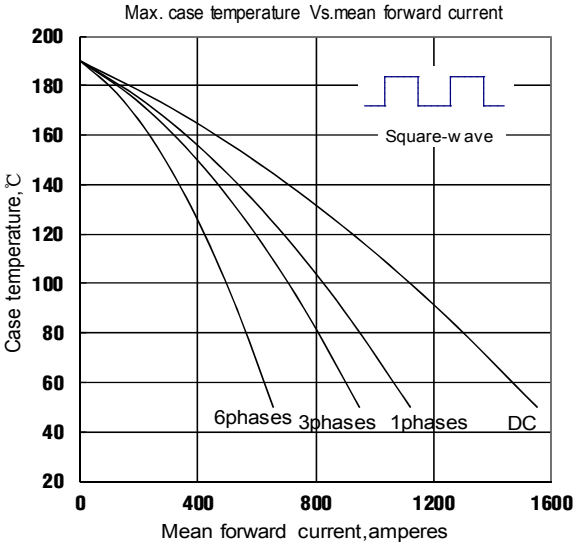


Fig6

TECHSEM

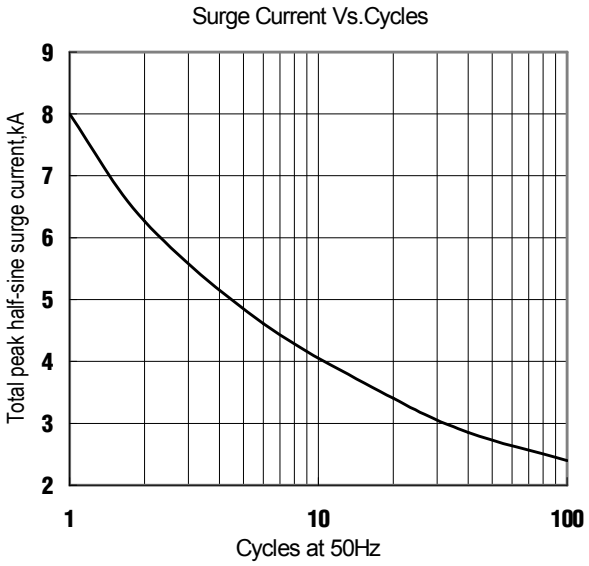


Fig.7


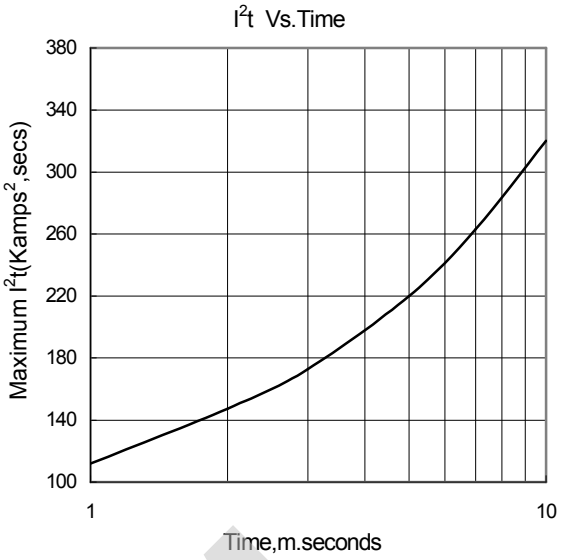


Fig.8

Outline:

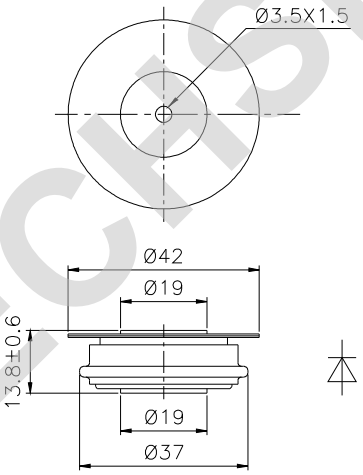

TECHSEM

TECHSEM reserves the right to change specifications without notice.