


Small Signal Schottky Diode

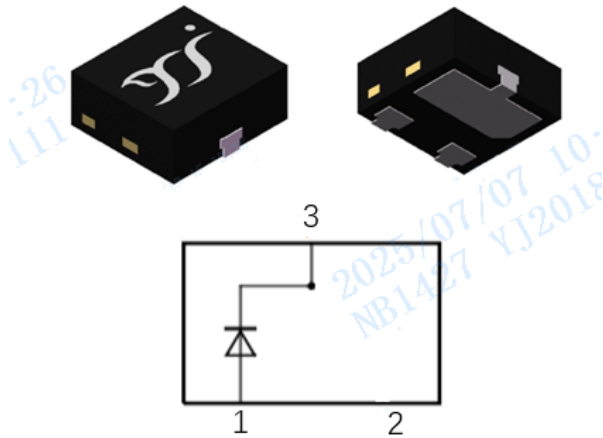

Features

- Epoxy meets UL-94 V-0 flammability rating and halogen free
- Moisture Sensitivity Level 1
- V_R 40V
- I_F 120mA
- Part no. with suffix "Q" means AEC-Q101 qualified

Applications

- Ultra high speed switching
- Automotive

Mechanical Data

- **Case:** DFN1412-3L-SWF
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102

■ Maximum Ratings ($T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	CONDITIONS	VALUE
Reverse Voltage	V_R	V		40
Forward Current	I_F	mA		120
Peak Forward Surge Current	I_{FSM}	A	$t=8.3\text{ms}$	1
Power Dissipation	P_{tot}	mW		150
Thermal Resistance Junction to Ambient	R_{thJA}	$^\circ\text{C}/\text{W}$		833
Junction Temperature	T_j	$^\circ\text{C}$		-55 to +150
Storage Temperature Range	T_{stg}	$^\circ\text{C}$		-55 to +150

■ Electrical Characteristics ($T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	CONDITIONS	MIN	MAX
Forward Voltage	V_F	V	$I_F=1\text{mA}$		0.38
			$I_F=40\text{mA}$		1
Reverse Current	I_R	μA	$V_R=30\text{V}$		0.2
Reverse Breakdown Voltage	V_{BR}	V	$I_R=10\mu\text{A}$	40	
Junction Capacitance	C_J	pF	$V_R=0\text{V}$, $f=1\text{MHz}$		5
Reverse Recovery Time	t_{rr}	ns	$I_F=I_R=10\text{mA}$, $I_{rr}=1\text{mA}$, $R_L=100\Omega$		7



BAS40QCHQ

■ Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
BAS40QCHQ	F1	Approximate0.0025	3K	30K	120K	7" reel

■ Characteristics (Typical)

Fig.1: PD-Ta Curve

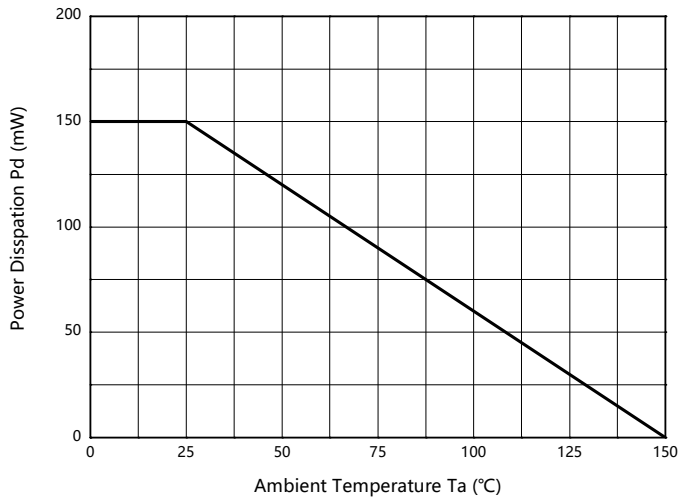


Fig.2: Capacitance Characteristics

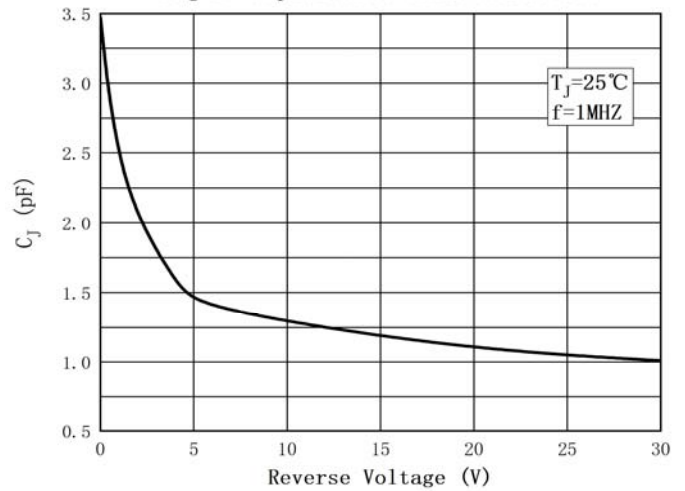


Fig.3:Forward Characteristics


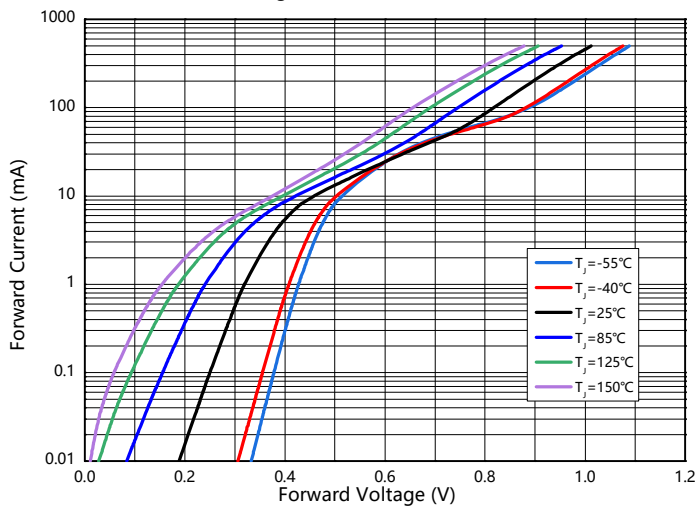



Fig.4: Reverse Characteristics



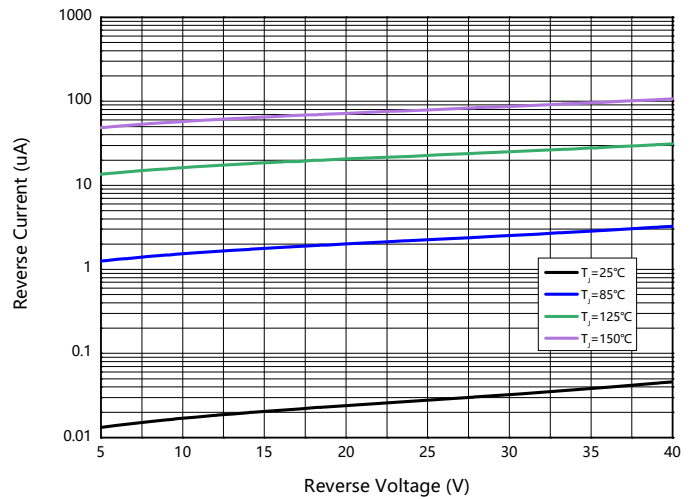


BAS40QCHQ

■ Outline Dimensions

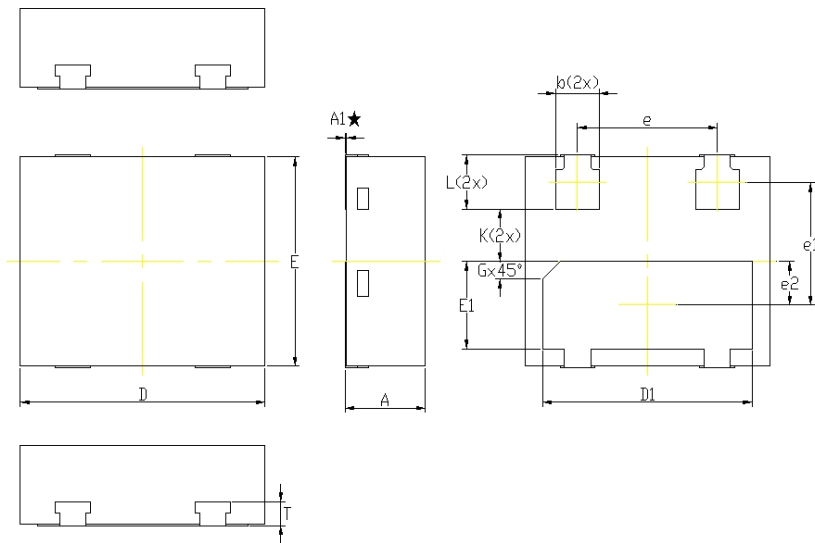

SYMBOY	MILLIMETER		
	MIN	NOM	MAX
A	0.4100	0.4600	0.5100
A1	0.0050		0.1000
b	0.1600	0.2500	0.3400
D	1.3000	1.4000	1.5000
D1	1.1500	1.2000	1.2500
E	1.1000	1.2000	1.3000
E1	0.4500	0.5000	0.5500
e	\	0.8000	\
e1	\	0.7000	\
e2	\	0.2500	\
G	\	0.1(REF)	\
K	0.2500	\	\
L	0.2500	0.3000	0.3500
T	0.1000	0.1600	0.2200

■ Marking Information



Note:

1. All marking is at middle of the product body
2. All marking is in laser marking
3. 43 is Marking Code
4. Body color: Black



BAS40QCHQ

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, life-saving, life-sustaining, or military. Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.