


NPN Plastic-Encapsulate Transistor

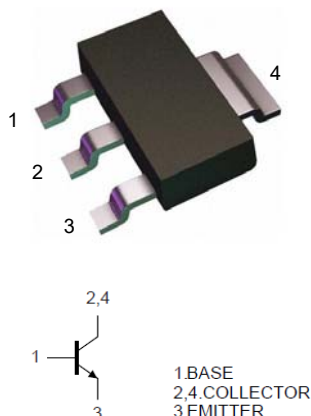

SOT-223

Features

- Epoxy meets UL-94 V-0 flammability rating and halogen free
- Moisture Sensitivity Level 1
- Halogen Free.
- Part no. with suffix "Q" means AEC-Q101 qualified

Applications

- Linear voltage regulators
- Low-side switches
- Battery-driven devices
- MOSFET drivers
- Amplifiers

Mechanical Data

- Case: SOT-223
- Terminals: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- Marking: BCP56-16.

■ Maximum Ratings (Ta= 25°C unless otherwise noted)

Item	Symbol	Unit	Value
Collector-Base Voltage	V_{CBO}	V	100
Collector-Emitter Voltage	V_{CEO}	V	80
Emitter-Base Voltage	V_{EBO}	V	5
Collector Current -Continuous	I_C	A	1
Total Device Dissipation (*)	P_D	W	1.5
Thermal Resistance From Junction To Ambient (*)	$R_{\theta JA}$	°C/W	83.3
Thermal Resistance From Junction To Solder Point (*)	$R_{\theta JS}$	°C/W	16
Junction Temperature	T_j	°C	-55 to +150
Storage Temperature	T_{STG}	°C	-55 to +150

(*) Device mounted on FR-4 PCB 1.575 x 1.575 x 0.0625 inch; mounting pad for collector =0.93 sq in



BCP56-16Q

■ Electrical Characteristics (Ta= 25°C unless otherwise noted)

Item	Symbol	Unit	Conditions	Min	Typ	Max
Collector-base breakdown voltage	V_{CBO}	V	$I_C = 100\mu A, I_E = 0$	100		
Collector-emitter breakdown voltage	V_{CEO}	V	$I_C = 10mA, I_B = 0$	80		
Emitter-base breakdown voltage	V_{EBO}	V	$I_E = 10\mu A, I_C = 0$	5		
Collector-base cut-off current	I_{CBO}	μA	$V_{CB} = 30V, I_E = 0$			0.1
DC current gain	h_{FE}		$V_{CE} = 2V, I_C = 5mA$	25		
	h_{FE}		$V_{CE} = 2V, I_C = 150mA$	100		250
	h_{FE}		$V_{CE} = 2V, I_C = 500mA$	25		
Collector-emitter saturation voltage	$V_{CE(sat)}$	V	$I_C = 500mA, I_B = 50mA$			0.5
Base-emitter saturation voltage	V_{BE}	V	$V_{CE} = 2V, I_C = 500mA$			1.0

■ Other Characteristics (Ta= 25°C unless otherwise noted)

Item	Symbol	Unit	Conditions	Min	Typ	Max
Transition frequency	f_T	MHz	$V_{CE} = 10V, I_C = 50mA, f = 100MHz$	100		

■ Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
BCP56-16Q	F2	Approximate 0.1	2500	5000	25000	13" reel

■ Characteristics(Typical)

Fig.1 - Collector Saturation Region

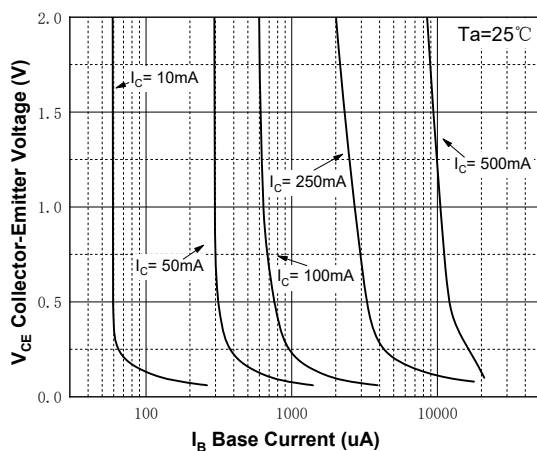


Fig.2 - DC Current Gain

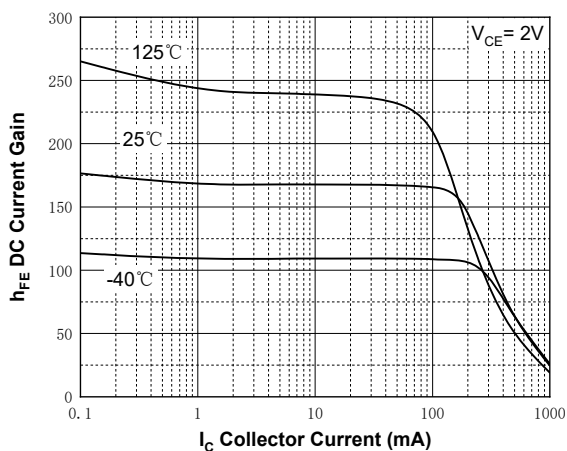


Fig.3 - Collector-Emitter Saturation Voltage vs. Collector Current

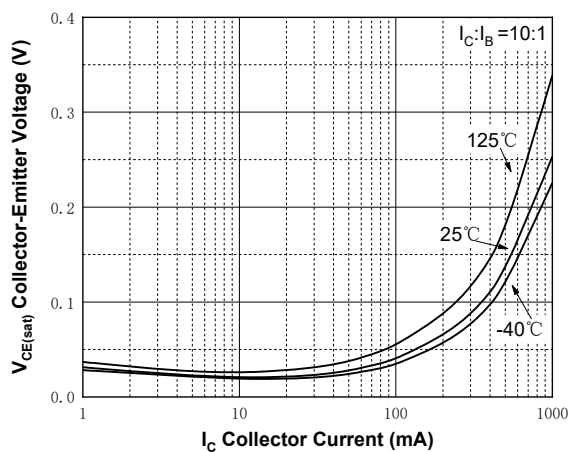


Fig.4 - Base-Emitter Saturation Voltage vs. Collector Current

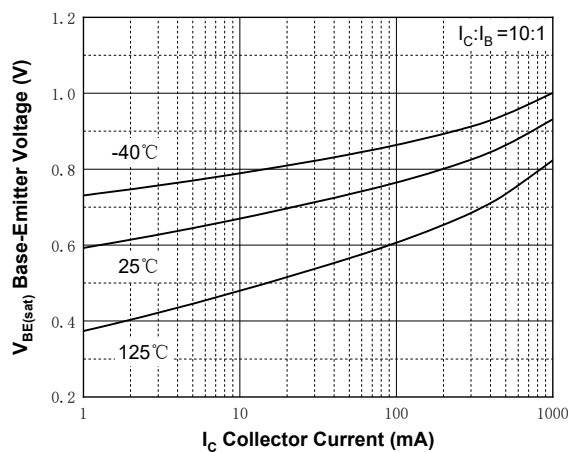


Fig.5 - Capacitance



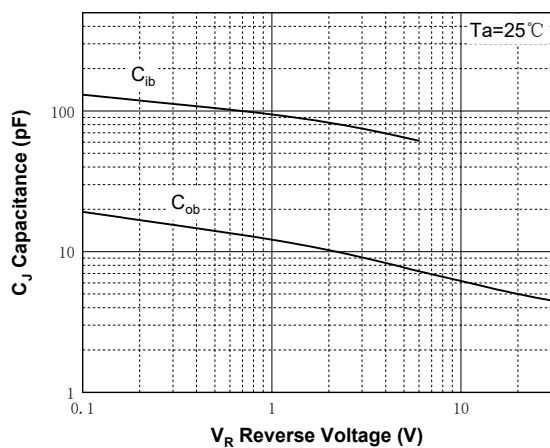


Fig.6 - Power Derating Curve

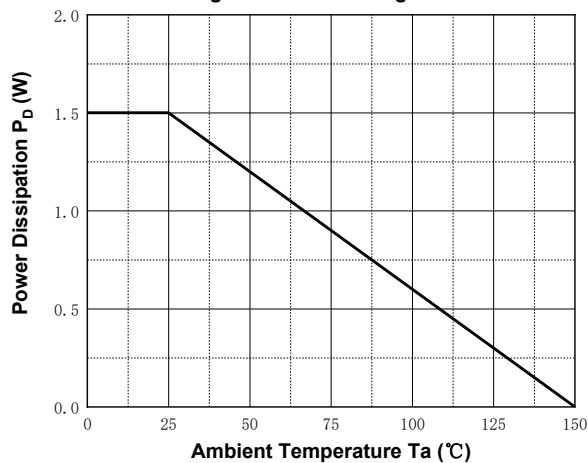


■ SOT-223 Package Outline Dimensions

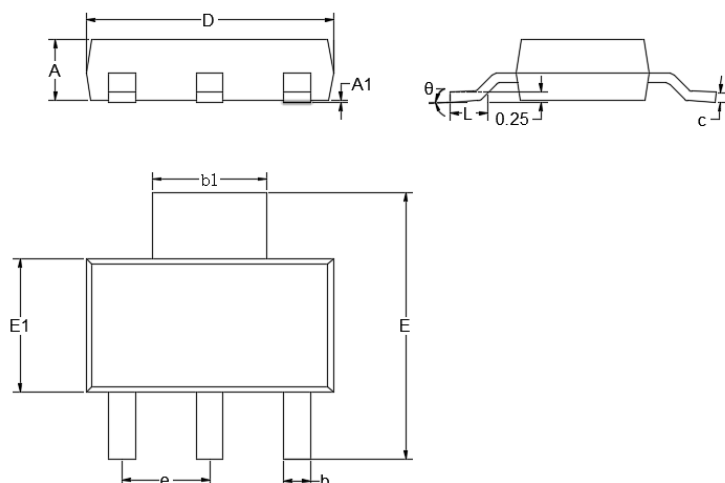


DIM	DIMENSIONS			
	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.0591	0.0670	1.5000	1.7000
A1	0.0008	0.0039	0.0200	0.1000
b	0.0259	0.0330	0.6600	0.8400
b1	0.1140	0.1220	2.9000	3.1000
c	0.0090	0.0138	0.2300	0.3500
D	0.2480	0.2640	6.3000	6.7000
E	0.2637	0.2874	6.7000	7.3000
E1	0.1290	0.1460	3.3000	3.7000
e	0.0866	0.0945	2.2000	2.4000
L	0.0295	0.0492	0.7500	1.2500
θ	0°	10°	0°	10°

■ SOT-223 Suggested Pad Layout

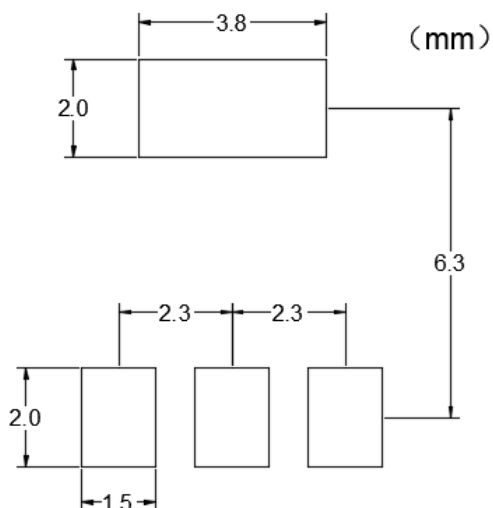

■ Marking Information



Note:

1. All marking is at middle of the product body
2. All marking is in laser marking
3. BCP56-16. is Marking Code
4. Body color: Black



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, life-saving, life-sustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.