


Small Signal Zener Diodes



SOT-23

Features

- Epoxy meets UL-94 V-0 flammability rating and halogen free
- Moisture Sensitivity Level 1
- Zener Voltage 3.6V~36V
- V_Z -tolerance $\pm 2\%$ approximately
- Part no. with suffix "Q" means AEC-Q101 qualified

Applications

- General regulation functions

Mechanical Data

- **Case:** SOT-23
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102

■ Maximum Ratings ($T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	VALUE
Power Dissipation	P_D	mW	350
Storage Temperature Range	T_{stg}	$^\circ\text{C}$	-55~+150
Junction Temperature	T_J	$^\circ\text{C}$	-55~+150
Maximum Regulator Current	I_{ZM}	mA	P_D / V_Z
Maximum Forward Voltage ($I_F=10\text{mA}_{dc}$)	V_F	V	0.9
Thermal Resistance Junction to Ambient Air	$R_{\theta JA}$	$^\circ\text{C}/\text{W}$	357

■ Ordering Information (Example)

PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
BZX84B3V6HQ THRU BZX84B36HQ	F2	Approximate 0.01	3000	30000	120000	7" reel



BZX84B3V6HQ THRU BZX84B36HQ







■ Electrical Characteristics (T_a=25℃ Unless otherwise specified)

Type Number	Device Marking	V _z at I _{zt} (V)			I _{zt} mA	Z _{zt} (Ω)		Z _{zk} (Ω)		I _R (μA)@V _R		Typical Temperature Coefficient@ I _{ZTC} mV/℃		Test Current I _{ZTC} mA
		min.	typ.	max.		I _{zt} (mA)	max.	I _{zk} (mA)	max.	uA	V _R (V)	Min	Max	
BZX84B3V6HQ	Z15	3.53	3.6	3.67	5	5	90	1.0	600	5	1.0	-3.5	0	5
BZX84B3V9HQ	Z16	3.82	3.9	3.98	5	5	90	1.0	600	3	1.0	-3.5	0	5
BZX84B4V3HQ	Z17	4.21	4.3	4.39	5	5	90	1.0	600	3	1.0	-3.5	0	5
BZX84B4V7HQ	Z1	4.61	4.7	4.79	5	5	80	1.0	500	3	2.0	-3.5	0.2	5
BZX84B5V1HQ	Z2	5.0	5.1	5.2	5	5	60	1.0	480	2	2.0	-2.7	1.2	5
BZX84B5V6HQ	Z3	5.49	5.6	5.71	5	5	40	1.0	400	1	2.0	-2	2.5	5
BZX84B6V2HQ	Z4	6.08	6.2	6.32	5	5	10	1.0	150	3	4.0	0.4	3.7	5
BZX84B6V8HQ	Z5	6.66	6.8	6.94	5	5	15	1.0	80	2	4.0	1.2	4.5	5
BZX84B7V5HQ	Z6	7.35	7.5	7.65	5	5	15	1.0	80	1	5.0	2.5	5.3	5
BZX84B8V2HQ	Z7	8.04	8.2	8.36	5	5	15	1.0	80	0.7	5.0	3.2	6.2	5
BZX84B9V1HQ	Z8	8.92	9.1	9.28	5	5	15	1.0	100	0.5	6.0	3.8	7.0	5
BZX84B10HQ	Z9	9.8	10	10.2	5	5	20	1.0	150	0.2	7.0	4.5	8.0	5
BZX84B11HQ	Y1	10.78	11	11.22	5	5	20	1.0	150	0.1	8.0	5.4	9.0	5
BZX84B12HQ	Y2	11.76	12	12.24	5	5	25	1.0	150	0.1	8.0	6.0	10.0	5
BZX84B13HQ	Y3	12.74	13	13.3	5	5	30	1.0	170	0.1	8.0	7.0	11.0	5
BZX84B15HQ	Y4	14.7	15	15.3	5	5	30	1.0	200	0.1	10.5	9.2	13.0	5
BZX84B16HQ	Y5	15.68	16	16.3	5	5	40	1.0	200	0.1	11.2	10.4	14.0	5
BZX84B18HQ	Y6	17.6	18	18.4	5	5	45	1.0	225	0.1	12.6	12.4	16.0	5
BZX84B20HQ	Y7	19.6	20	20.4	5	5	55	1.0	225	0.1	14.0	14.4	18.0	5
BZX84B22HQ	Y8	21.56	22	22.44	5	5	55	1.0	250	0.1	15.4	16.4	20.0	5
BZX84B24HQ	Y9	23.52	24	24.5	5	5	70	1.0	250	0.1	16.8	18.4	22.0	5
BZX84B27HQ	Y10	26.46	27	27.54	2	2	80	0.5	300	0.1	18.9	21.4	25.3	2
BZX84B30HQ	Y11	29.4	30	30.6	2	2	80	0.5	300	0.1	21.0	24.4	29.4	2
BZX84B33HQ	Y12	32.34	33	33.7	2	2	80	0.5	325	0.1	23.1	27.4	33.4	2
BZX84B36HQ	Y13	35.28	36	36.72	2	2	90	0.5	350	0.1	25.2	30.4	37.4	2




BZX84B3V6HQ THRU BZX84B36HQ

■ Characteristics (Typical)

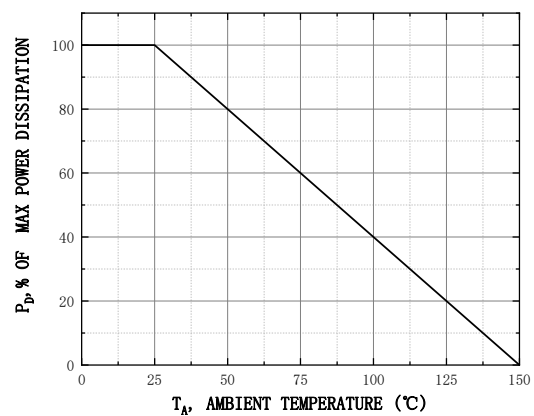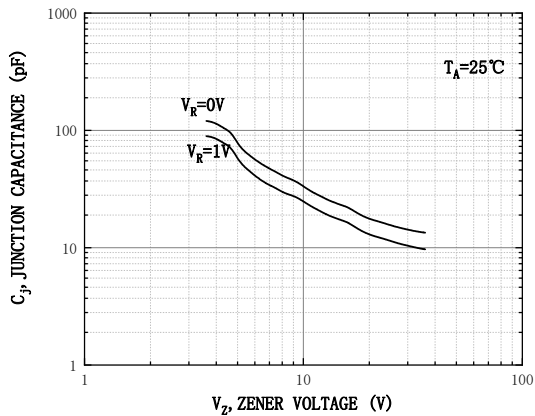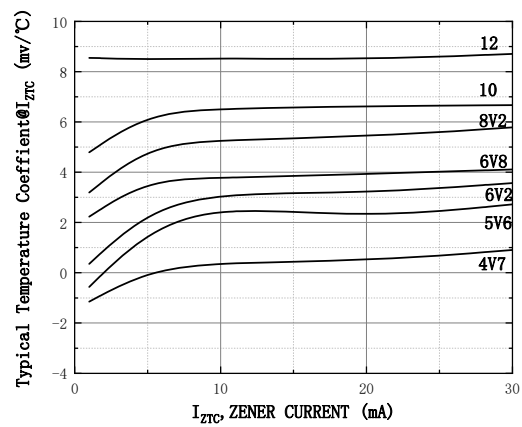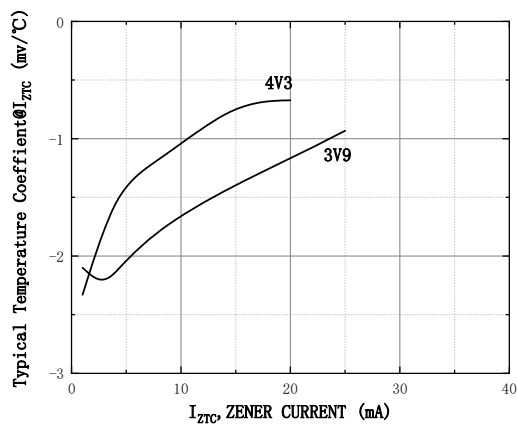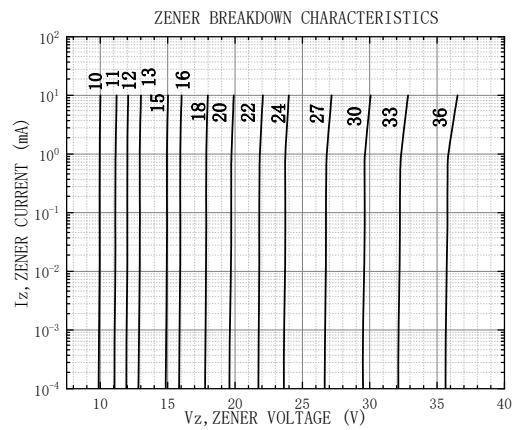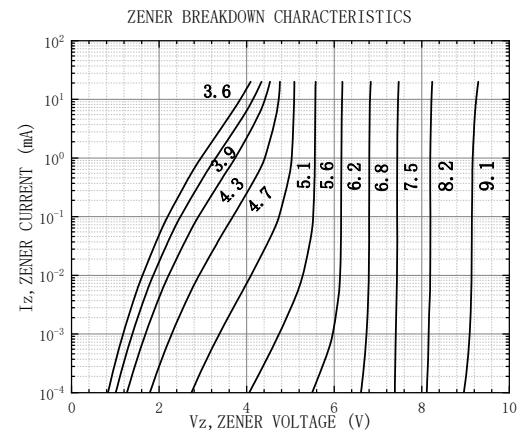







BZX84B3V6HQ THRU BZX84B36HQ

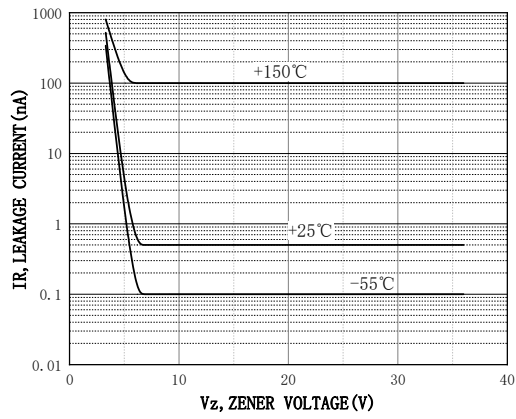



BZX84B3V6HQ THRU BZX84B36HQ

■ Outline Dimensions



UNIT: mm


SUGGESTED SOLDER PAD LAYOUT

SYMBOL	DIMENSIONS			
	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.035	0.045	0.900	1.150
A1	0.000	0.004	0.000	0.100
A2	0.035	0.041	0.900	1.050
b	0.012	0.020	0.300	0.500
c	0.004	0.008	0.100	0.200
D	0.110	0.118	2.800	3.000
E	0.047	0.055	1.200	1.400
E1	0.089	0.100	2.250	2.550
e	0.037TYP		0.950TYP	
e1	0.071	0.079	1.800	2.000
L	0.022REF		0.550REF	
L1	0.012	0.200	0.300	0.500
θ	0°	8°	0°	8°

NOTE:

- 1.PACKAGE BODY SIZES EXCLUDE MOLD FLASH AND GATE BURRS.
- 2.TOLERANCE 0.1mm UNLESS OTHERWISE SPECIFIED.
- 3.THE PAD LAYOUT IS FOR REFERENCE PURPOSES ONLY.

■ Marking Information

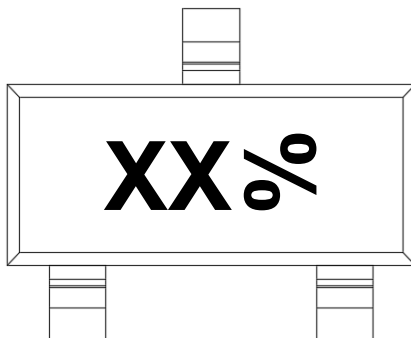

Note:

1. All marking is at middle of the product body
2. All marking is in laser marking
3. XX is Marking Code
4. % is a date code, rotated 90° counterclockwise

*Date Code vary depending upon production date



BZX84B3V6HQ THRU BZX84B36HQ

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, life-saving, lifesustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.