


Small Signal Zener Diodes



SOT-23

Features

- Epoxy meets UL-94 V-0 flammability rating and halogen free
- Moisture Sensitivity Level 1
- Zener Voltage 2.4V~47V
- V_Z -tolerance $\pm 5\%$ approximately
- Part no. with suffix "Q" means AEC-Q101 qualified

Applications

- General regulation functions

Mechanical Data

- **Case:** SOT-23
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102

■ Maximum Ratings ($T_a=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	VALUE
Power Dissipation	P_D	mW	350
Storage Temperature Range	T_{stg}	$^\circ\text{C}$	-55~+150
Junction Temperature	T_J	$^\circ\text{C}$	-55~+150
Maximum Regulator Current	I_{ZM}	mA	P_D / V_Z
Maximum Forward Voltage ($I_F=10\text{mA}_{dc}$)	V_F	V	0.9
Thermal Resistance Junction to Ambient Air*	$R_{\theta JA}$	$^\circ\text{C} / \text{W}$	357

■ Ordering Information (Example)

PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
BZX84C2V4HQ THRU BZX84C47HQ	F2	Approximate 0.01	3000	30000	120000	7" reel



BZX84C2V4HQ THRU BZX84C47HQ







■ Electrical Characteristics (T_a=25℃ Unless otherwise specified)

Type Number	Device Marking	V _z at I _{zt} (V)			I _{zt} mA	Z _{zt} (Ω)		Z _{zk} (Ω)		I _R (μA)@V _R		Typical Temperature Coefficient@ I _{ZTC} mV/℃		Test Current I _{ZTC} mA
		min.	typ.	max.		I _{zt} (mA)	max.	I _{zk} (mA)	max.	uA	V _R (V)	Min	Max	
BZX84C2V4HQ	Z11	2.28	2.4	2.56	5	5	100	1.0	600	50	1.0	-3.5	0	5
BZX84C2V7HQ	Z12	2.5	2.7	2.9	5	5	100	1.0	600	20	1.0	-3.5	0	5
BZX84C3V0HQ	Z13	2.8	3.0	3.2	5	5	95	1.0	600	10	1.0	-3.5	0	5
BZX84C3V3HQ	Z14	3.1	3.3	3.5	5	5	95	1.0	600	5	1.0	-3.5	0	5
BZX84C3V6HQ	Z15	3.4	3.6	3.8	5	5	90	1.0	600	5	1.0	-3.5	0	5
BZX84C3V9HQ	Z16	3.7	3.9	4.1	5	5	90	1.0	600	3	1.0	-3.5	0	5
BZX84C4V3HQ	Z17	4.0	4.3	4.6	5	5	90	1.0	600	3	1.0	-3.5	0	5
BZX84C4V7HQ	Z1	4.4	4.7	5.0	5	5	80	1.0	500	3	2.0	-3.5	0.2	5
BZX84C5V1HQ	Z2	4.8	5.1	5.4	5	5	60	1.0	480	2	2.0	-2.7	1.2	5
BZX84C5V6HQ	Z3	5.2	5.6	6.0	5	5	40	1.0	400	1	2.0	-2	2.5	5
BZX84C6V2HQ	Z4	5.8	6.2	6.6	5	5	10	1.0	150	3	4.0	0.4	3.7	5
BZX84C6V8HQ	Z5	6.4	6.8	7.2	5	5	15	1.0	80	2	4.0	1.2	4.5	5
BZX84C7V5HQ	Z6	7.0	7.5	7.9	5	5	15	1.0	80	1	5.0	2.5	5.3	5
BZX84C8V2HQ	Z7	7.7	8.2	8.7	5	5	15	1.0	80	0.7	5.0	3.2	6.2	5
BZX84C9V1HQ	Z8	8.5	9.1	9.6	5	5	15	1.0	100	0.5	6.0	3.8	7.0	5
BZX84C10HQ	Z9	9.4	10	10.6	5	5	20	1.0	150	0.2	7.0	4.5	8.0	5
BZX84C11HQ	Y1	10.4	11	11.6	5	5	20	1.0	150	0.1	8.0	5.4	9.0	5
BZX84C12HQ	Y2	11.4	12	12.7	5	5	25	1.0	150	0.1	8.0	6.0	10.0	5
BZX84C13HQ	Y3	12.4	13	14.1	5	5	30	1.0	170	0.1	8.0	7.0	11.0	5
BZX84C15HQ	Y4	13.8	15	15.6	5	5	30	1.0	200	0.1	10.5	9.2	13.0	5
BZX84C16HQ	Y5	15.3	16	17.1	5	5	40	1.0	200	0.1	11.2	10.4	14.0	5
BZX84C18HQ	Y6	16.8	18	19.1	5	5	45	1.0	225	0.1	12.6	12.4	16.0	5
BZX84C20HQ	Y7	18.8	20	21.2	5	5	55	1.0	225	0.1	14.0	14.4	18.0	5
BZX84C22HQ	Y8	20.8	22	23.3	5	5	55	1.0	250	0.1	15.4	16.4	20.0	5
BZX84C24HQ	Y9	22.8	24	25.6	5	5	70	1.0	250	0.1	16.8	18.4	22.0	5
BZX84C27HQ	Y10	25.1	27	28.9	2	2	80	0.5	300	0.1	18.9	21.4	25.3	2
BZX84C30HQ	Y11	28	30	32	2	2	80	0.5	300	0.1	21.0	24.4	29.4	2
BZX84C33HQ	Y12	31	33	35	2	2	80	0.5	325	0.1	23.1	27.4	33.4	2
BZX84C36HQ	Y13	34	36	38	2	2	90	0.5	350	0.1	25.2	30.4	37.4	2
BZX84C39HQ	Y14	37	39	41	2	2	130	0.5	350	0.1	27.3	33.4	41.2	2
BZX84C43HQ	Y15	40	43	46	2	2	100	0.5	700	0.1	32	37.6	50.6	2
BZX84C47HQ	Y16	44	47	50	2	2	100	0.5	750	0.1	35	42.0	55.8	2




BZX84C2V4HQ THRU BZX84C47HQ

■ Characteristics (Typical)

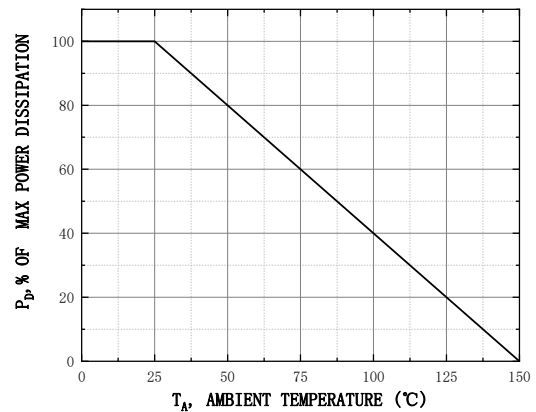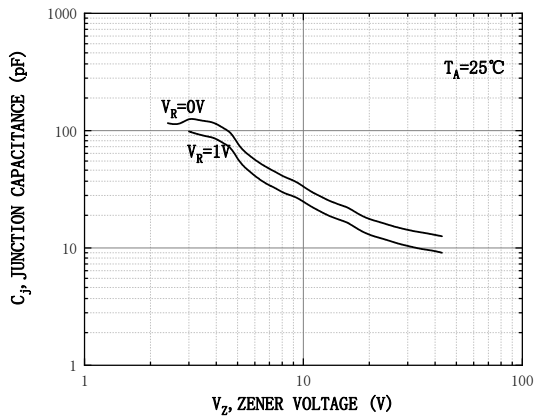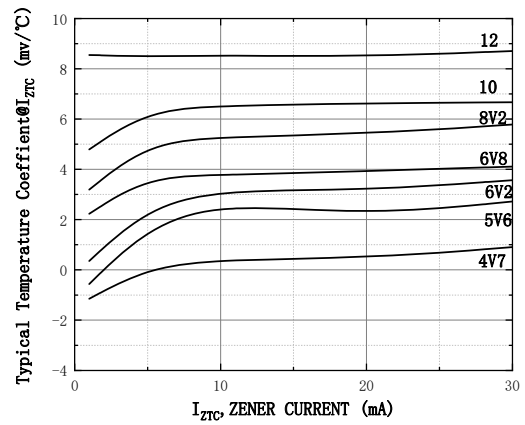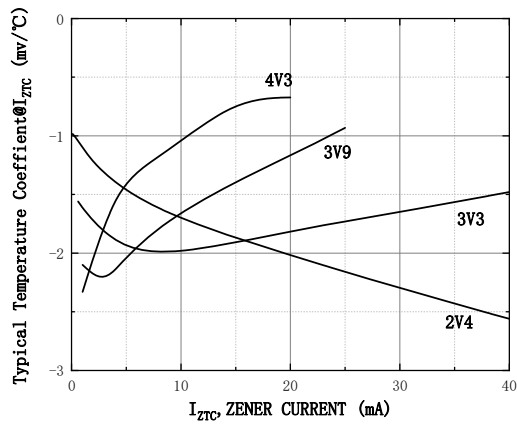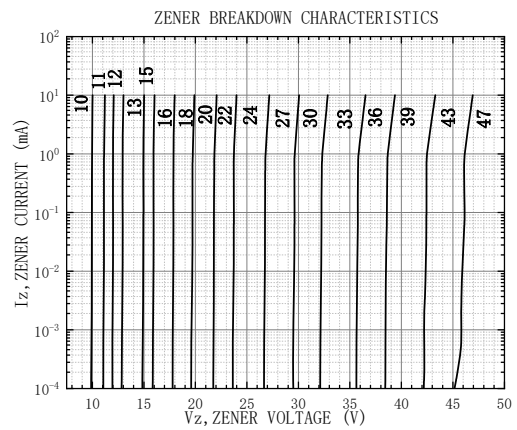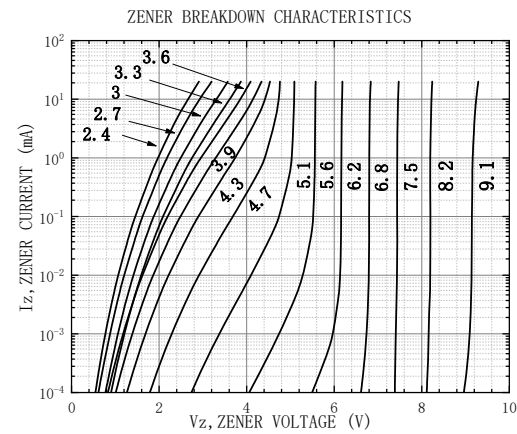







BZX84C2V4HQ THRU BZX84C47HQ

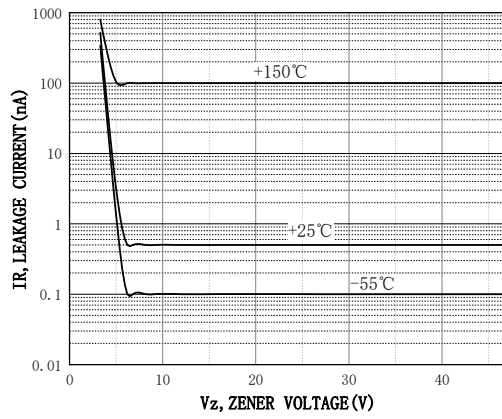



BZX84C2V4HQ THRU BZX84C47HQ

■ Outline Dimensions



UNIT: mm


SUGGESTED SOLDER PAD LAYOUT

SYMBOL	DIMENSIONS			
	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.035	0.045	0.900	1.150
A1	0.000	0.004	0.000	0.100
A2	0.035	0.041	0.900	1.050
b	0.012	0.020	0.300	0.500
c	0.004	0.008	0.100	0.200
D	0.110	0.118	2.800	3.000
E	0.047	0.055	1.200	1.400
E1	0.089	0.100	2.250	2.550
e	0.037TYP		0.950TYP	
e1	0.071	0.079	1.800	2.000
L	0.022REF		0.550REF	
L1	0.012	0.200	0.300	0.500
θ	0°	8°	0°	8°

NOTE:

- 1.PACKAGE BODY SIZES EXCLUDE MOLD FLASH AND GATE BURRS.
- 2.TOLERANCE 0.1mm UNLESS OTHERWISE SPECIFIED.
- 3.THE PAD LAYOUT IS FOR REFERENCE PURPOSES ONLY.

■ Marking Information

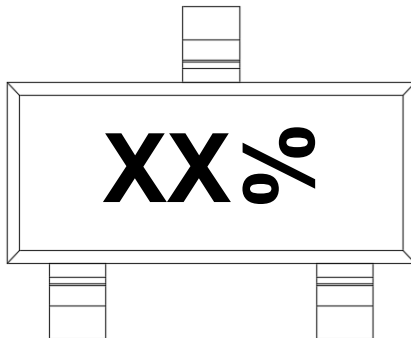

Note:

1. All marking is at middle of the product body
2. All marking is in laser marking
3. XX is Marking Code
4. % is a date code, rotated 90° counterclockwise

*Date Code vary depending upon production date



BZX84C2V4HQ THRU BZX84C47HQ

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, life-saving, lifesustaining, or military. Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.