




Small Signal Zener Diode



SOT-23

Features

- Epoxy meets UL-94 V-0 flammability rating and halogen free
- Moisture Sensitivity Level 1
- Zener Voltage 2.4V~47V
- V_Z -tolerance for both diodes in one case is $\leq 5\%$
- Part no. with suffix "Q" means AEC-Q101 qualified

Applications

- General regulation functions

Mechanical Data

- **Case:** SOT-23
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102

■Limiting Values (Absolute Maximum Rating, $T_a=25^\circ\text{C}$ Unless otherwise specified)

Characteristic	Symbol	Value	Units
Power Dissipation	$P_{D[1]}$	300	mW
Maximum Forward Voltage ($I_F=10\text{mA}$)	V_F	0.9	V
Maximum Regulator Current	$I_{ZM[1]}$	P_D / V_Z	mA
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	417	$^\circ\text{C} / \text{W}$
Storage Temperature Range	T_{STG}	-55~+150	$^\circ\text{C}$
Operation Temperature	T_J	-55~+150	$^\circ\text{C}$

[1] Single diode loaded

■Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
DZ23C2V4HQ THRU DZ23C47HQ	F2	Approximate 0.01	3000	30000	120000	7" reel



DZ23C2V4HQ THRU DZ23C47HQ







■Electrical Characteristics (T_a=25°C Unless otherwise specified)

Type Number	Device Marking	V _z at I _{zt} (V)			I _{zt} mA	Z _{zt} (Ω)		Z _{zk} (Ω)		I _R (μA)@V _R		Typical Temperature Coefficient@ I _{ZTC} mV/°C		Test Current I _{ZTC} mA
		min.	typ.	max.		I _{zt} (mA)	max.	I _{zk} (mA)	max.	uA	V _R (V)	Min	Max	
DZ23C2V4HQ	V0	2.28	2.4	2.56	5	5	100	1.0	600	50	1.0	-3.5	0	5
DZ23C2V7HQ	KV1	2.5	2.7	2.9	5	5	100	1.0	600	20	1.0	-3.5	0	5
DZ23C3V0HQ	KV2	2.8	3.0	3.2	5	5	95	1.0	600	10	1.0	-3.5	0	5
DZ23C3V3HQ	KV3	3.1	3.3	3.5	5	5	95	1.0	600	5	1.0	-3.5	0	5
DZ23C3V6HQ	KV4	3.4	3.6	3.8	5	5	90	1.0	600	5	1.0	-3.5	0	5
DZ23C3V9HQ	KV5	3.7	3.9	4.1	5	5	90	1.0	600	3	1.0	-3.5	0	5
DZ23C4V3HQ	KV6	4.0	4.3	4.6	5	5	90	1.0	600	3	1.0	-3.5	0	5
DZ23C4V7HQ	KV7	4.4	4.7	5.0	5	5	80	1.0	500	3	2.0	-3.5	0.2	5
DZ23C5V1HQ	KV8	4.8	5.1	5.4	5	5	60	1.0	480	2	2.0	-2.7	1.2	5
DZ23C5V6HQ	KV9	5.2	5.6	6.0	5	5	40	1.0	400	1	2.0	-2	2.5	5
DZ23C6V2HQ	KVA	5.8	6.2	6.6	5	5	10	1.0	150	3	4.0	0.4	3.7	5
DZ23C6V8HQ	KVB	6.4	6.8	7.2	5	5	15	1.0	80	2	4.0	1.2	4.5	5
DZ23C7V5HQ	KVC	7.0	7.5	7.9	5	5	15	1.0	80	1	5.0	2.5	5.3	5
DZ23C8V2HQ	KVD	7.7	8.2	8.7	5	5	15	1.0	80	0.7	5.0	3.2	6.2	5
DZ23C9V1HQ	KVE	8.5	9.1	9.6	5	5	15	1.0	100	0.5	6.0	3.8	7.0	5
DZ23C10HQ	KVF	9.4	10	10.6	5	5	20	1.0	150	0.2	7.0	4.5	8.0	5
DZ23C11HQ	KVG	10.4	11	11.6	5	5	20	1.0	150	0.1	8.0	5.4	9.0	5
DZ23C12HQ	KVH	11.4	12	12.7	5	5	25	1.0	150	0.1	8.0	6.0	10.0	5
DZ23C13HQ	KVI	12.4	13	14.1	5	5	30	1.0	170	0.1	8.0	7.0	11.0	5
DZ23C15HQ	KVJ	13.8	15	15.6	5	5	30	1.0	200	0.1	10.5	9.2	13.0	5
DZ23C16HQ	KVK	15.3	16	17.1	5	5	40	1.0	200	0.1	11.2	10.4	14.0	5
DZ23C18HQ	KVL	16.8	18	19.1	5	5	45	1.0	225	0.1	12.6	12.4	16.0	5
DZ23C20HQ	KVM	18.8	20	21.2	5	5	55	1.0	225	0.1	14.0	14.4	18.0	5
DZ23C22HQ	KVN	20.8	22	23.3	5	5	55	1.0	250	0.1	15.4	16.4	20.0	5
DZ23C24HQ	KVO	22.8	24	25.6	5	5	70	1.0	250	0.1	16.8	18.4	22.0	5
DZ23C27HQ	KVP	25.1	27	28.9	2	2	80	0.5	300	0.1	18.9	21.4	25.3	2
DZ23C30HQ	KVQ	28	30	32	2	2	80	0.5	300	0.1	21.0	24.4	29.4	2
DZ23C33HQ	KVR	31	33	35	2	2	80	0.5	325	0.1	23.1	27.4	33.4	2
DZ23C36HQ	KVS	34	36	38	2	2	90	0.5	350	0.1	25.2	30.4	37.4	2
DZ23C39HQ	KVT	37	39	41	2	2	130	0.5	350	0.1	27.3	33.4	41.2	2
DZ23C43HQ	KVU	40	43	46	2	2	100	0.5	700	0.1	32	37.6	50.6	2
DZ23C47HQ	KVV	44	47	50	2	2	100	0.5	750	0.1	35	42.0	55.8	2



DZ23C2V4HQ THRU DZ23C47HQ


■ Characteristics(Typical)

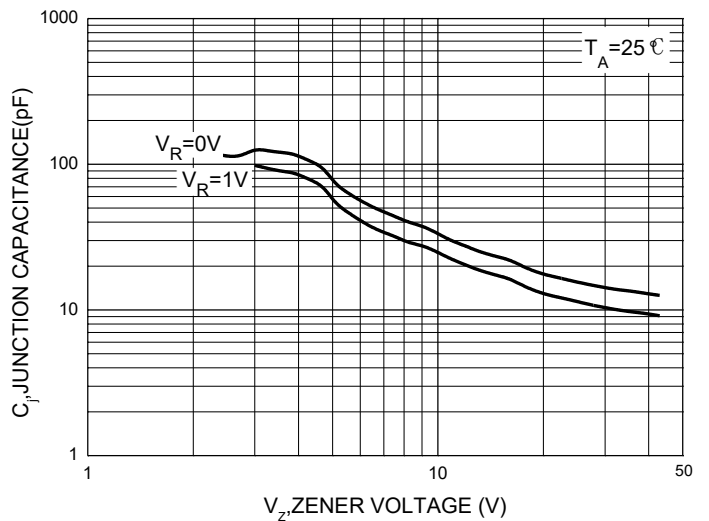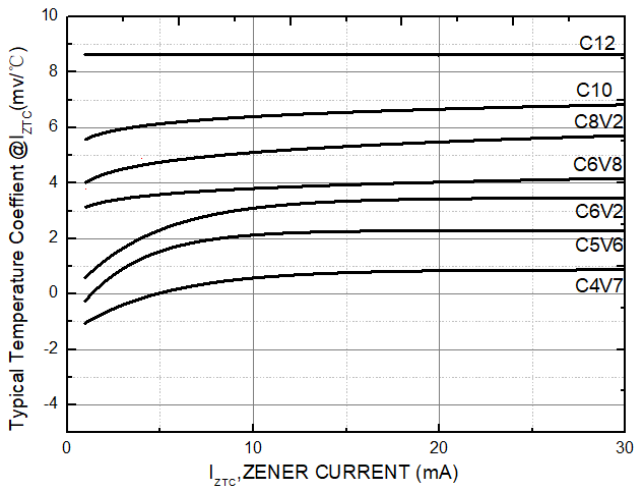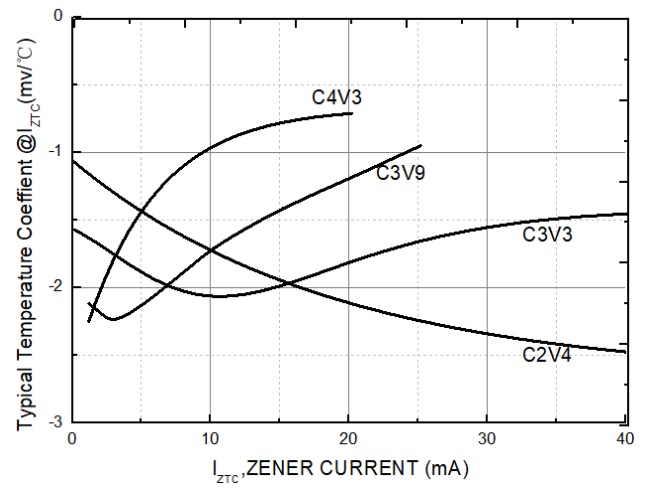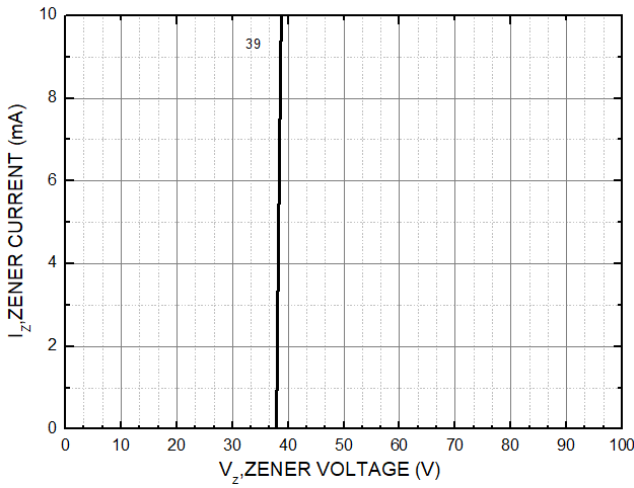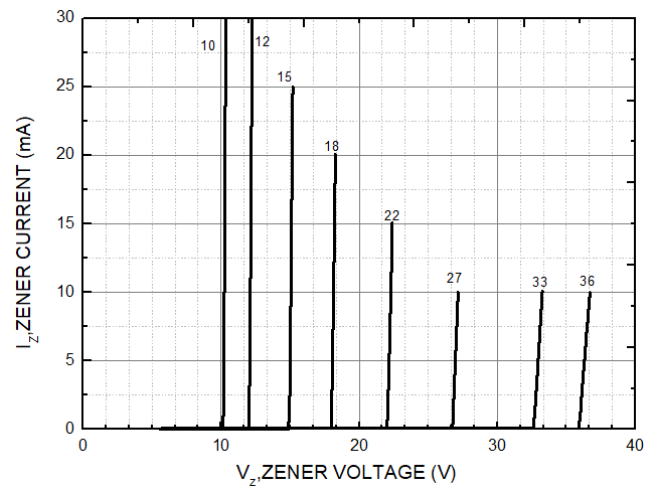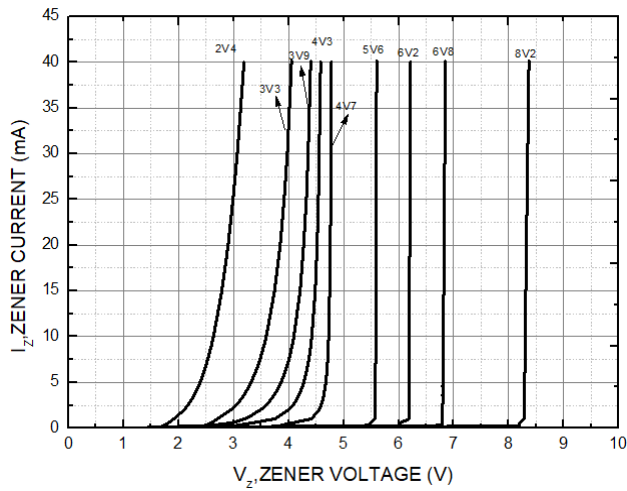




DZ23C2V4HQ THRU DZ23C47HQ


■ Outline Dimensions




TOP VIEW



SIDE VIEW



SIDE VIEW



UNIT: mm


SUGGESTED SOLDER PAD LAYOUT

SYMBOL	DIMENSIONS			
	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.035	0.045	0.900	1.150
A1	0.000	0.004	0.000	0.100
A2	0.035	0.041	0.900	1.050
b	0.012	0.020	0.300	0.500
c	0.004	0.008	0.100	0.200
D	0.110	0.118	2.800	3.000
E	0.047	0.055	1.200	1.400
E1	0.089	0.100	2.250	2.550
e	0.037TYP		0.950TYP	
e1	0.071	0.079	1.800	2.000
L	0.022REF		0.550REF	
L1	0.012	0.200	0.300	0.500
θ	0°	8°	0°	8°

NOTE:

- 1.PACKAGE BODY SIZES EXCLUDE MOLD FLASH AND GATE BURRS.
- 2.TOLERANCE 0.1mm UNLESS OTHERWISE SPECIFIED.
- 3.THE PAD LAYOUT IS FOR REFERENCE PURPOSES ONLY.

■ Marking Information

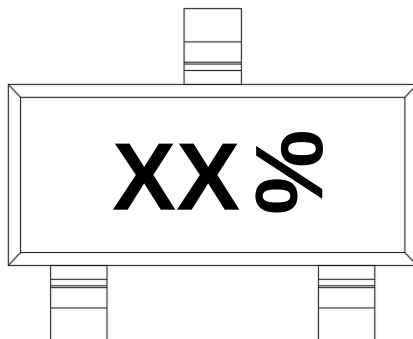

Note:

1. All marking is at middle of the product body
2. All marking is in laser marking
3. XX is Marking Code
4. % is a date code, rotated 90° counterclockwise

*Date Code vary depending upon production date



DZ23C2V4HQ THRU DZ23C47HQ

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, life-saving, lifesustaining, or military. Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.