



# KP5000-POWER THYRISTOR


6000-6500 V<sub>RSM</sub>

\*\*\*\*\*

## FREE FLOATING TYPE THYRISTOR FOR PHASE CONTROL APPLICATIONS

### Features:

- . Free-floating silicon technology
- . Low on-state and switching losses
- . Optimum power handling capability
- . Blocking capability up to 6500 volts
- . Distributed amplifying gate

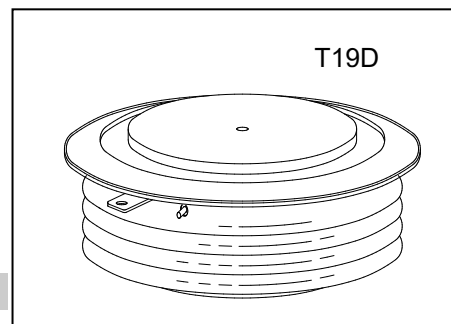

## ELECTRICAL CHARACTERISTICS AND RATINGS

### Blocking - Off State

| Device Type | V <sub>RRM</sub> (1) | V <sub>DRM</sub> (1) | V <sub>RSM</sub> (1) |
|-------------|----------------------|----------------------|----------------------|
| KP5000/60   | 5100                 | 5100                 | 6000                 |
| KP5000/62   | 5300                 | 5300                 | 6200                 |
| KP5000/65   | 5600                 | 5600                 | 6500                 |

V<sub>RRM</sub> = Repetitive peak reverse voltage

V<sub>DRM</sub> = Repetitive peak off state voltage

V<sub>RSM</sub> = Non repetitive peak reverse voltage (2)

|                                                       |                                    |                     |
|-------------------------------------------------------|------------------------------------|---------------------|
| Repetitive peak reverse leakage and off state leakage | I <sub>RRM</sub> /I <sub>DRM</sub> | 15 mA<br>350 mA (3) |
| Critical rate of voltage rise                         | dv/dt (4)                          | 2000 V/μs           |

Notes:

- (1) All voltage ratings are specified for an applied 50Hz sinusoidal waveform over the temperature range -40 °C to +115 °C.
- (2) 10 msec. max. pulse width
- (3) Maximum value for T<sub>j</sub> = 115 °C.
- (4) Minimum value for linear and exponential waveshape to 67% rated V<sub>DRM</sub>. Gate open. T<sub>j</sub> = 115 °C.
- (5) The value of di/dt is established in accordance with EIA/NIMA Standard JB/T 8950.2-2013

### Conducting - On State

| Parameter                                     | Symbol             | Min. | Max.                | Typ. | Units            | Conditions                                                                                     |
|-----------------------------------------------|--------------------|------|---------------------|------|------------------|------------------------------------------------------------------------------------------------|
| Average value of on-state current             | I <sub>T(AV)</sub> |      | 5000                |      | A                | Sinewave, 180° conduction, T <sub>c</sub> =70°C                                                |
| RMS value of on-state current                 | I <sub>TRMS</sub>  |      | 7850                |      | A                | Nominal value                                                                                  |
| Peak one cycle surge (non repetitive) current | I <sub>TSM</sub>   |      | 101000              |      | A                | 10.0 msec (50Hz), sinusoidal wave-shape, 180° conduction, T <sub>j</sub> = 115 °C              |
| I square t                                    | I <sup>2</sup> t   |      | 5.1x10 <sup>7</sup> |      | A <sup>2</sup> s | 10 msec                                                                                        |
| Latching current                              | I <sub>L</sub>     |      | 1000                |      | mA               | V <sub>D</sub> = 12 V; R <sub>L</sub> = 12 ohms                                                |
| Holding current                               | I <sub>H</sub>     |      | 200                 |      | mA               | V <sub>D</sub> = 12 V; I = 2.5 A                                                               |
| Peak on-state voltage                         | V <sub>TM</sub>    |      | 2.01                |      | V                | I <sub>TM</sub> =6000A; T <sub>j</sub> = 25°C                                                  |
| Threshold voltage, low-level                  | V <sub>TO</sub>    |      | 1.05                |      | V                | T <sub>j</sub> =115°C                                                                          |
| Slope resistance, low-level                   | r <sub>T</sub>     |      | 0.16                |      | mΩ               | 2000A to 6000A                                                                                 |
| Critical rate of rise of on-state current(5)  | di/dt              |      | 250                 |      | A/μs             | T <sub>j</sub> =115°C; V <sub>D</sub> = 0.67 V <sub>DRM</sub> ; f=50Hz; I <sub>TM</sub> =5000A |

**Gating**

| Parameter                      | Symbol      | Min. | Max. | Typ. | Units | Conditions                                                                  |
|--------------------------------|-------------|------|------|------|-------|-----------------------------------------------------------------------------|
| Peak gate power dissipation    | $P_{GM}$    |      | 20   |      | W     |                                                                             |
| Average gate power dissipation | $P_{G(AV)}$ |      | 4    |      | W     |                                                                             |
| Gate-trigger current           | $I_{GT}$    |      | 350  |      | mA    | $V_D = 12\text{ V}; R_L = 3\text{ ohms}; T_j = +25\text{ }^{\circ}\text{C}$ |
| Gate- trigger voltage          | $V_{GT}$    | 0.70 | 3.0  |      | V     | $V_D = 12\text{ V}; R_L = 3\text{ ohms}; T_j = +25\text{ }^{\circ}\text{C}$ |
| Peak negative voltage          | $V_{GRM}$   |      | 10   |      | V     |                                                                             |







**Dynamic**


| Parameter                                 | Symbol   | Min. | Max. | Typ. | Units         | Conditions                                                                                                                                               |
|-------------------------------------------|----------|------|------|------|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Delay time                                | $t_d$    |      |      | 3.0  | $\mu\text{s}$ | $I_{TM}=100\text{A}; V_D=67\%V_{DRM}$<br>Gate pulse: $V_G=30\text{V}; R_G=10\text{ohms};$<br>$t_r=0.1\mu\text{s}; t_p=20\mu\text{s}$                     |
| Turn-off time (with $V_R = -5\text{ V}$ ) | $t_q$    |      |      | 900  | $\mu\text{s}$ | $I_{TM}=2000\text{A}; di/dt=-1.5\text{A}/\mu\text{s};$<br>$V_R=100\text{V}; dv/dt=30\text{V}/\mu\text{s};$<br>$V_D=67\%V_{DRM}; T_j=115^{\circ}\text{C}$ |
| Reverse recovery charge                   | $Q_{rr}$ |      | 8000 |      | $\mu\text{C}$ | $I_{TM}=2000\text{A}; di/dt=-1.5\text{A}/\mu\text{s};$<br>$V_R=100\text{V}; T_j=115^{\circ}\text{C}$                                                     |

**THERMAL AND MECHANICAL CHARACTERISTICS AND RATINGS**

| Parameter                             | Symbol            | Min. | Max.   | Typ. | Units                       | Conditions          |
|---------------------------------------|-------------------|------|--------|------|-----------------------------|---------------------|
| Operating temperature                 | $T_j$             | -40  | +115   |      | $^{\circ}\text{C}$          |                     |
| Storage temperature                   | $T_{stg}$         | -40  | +140   |      | $^{\circ}\text{C}$          |                     |
| Thermal resistance - junction to case | $R_{\Theta(j-c)}$ |      | 0.0028 |      | $^{\circ}\text{C}/\text{W}$ | Double sided cooled |
| Thermal resistance - case to heatsink | $R_{\Theta(c-s)}$ |      | 0.0005 |      | $^{\circ}\text{C}/\text{W}$ | Double sided cooled |
| Mounting force                        | F                 | 170  | 190    | 180  | kN                          |                     |
| Weight                                | m                 |      |        | 5.0  | kg                          |                     |

\* Mounting surfaces smooth, flat and greased

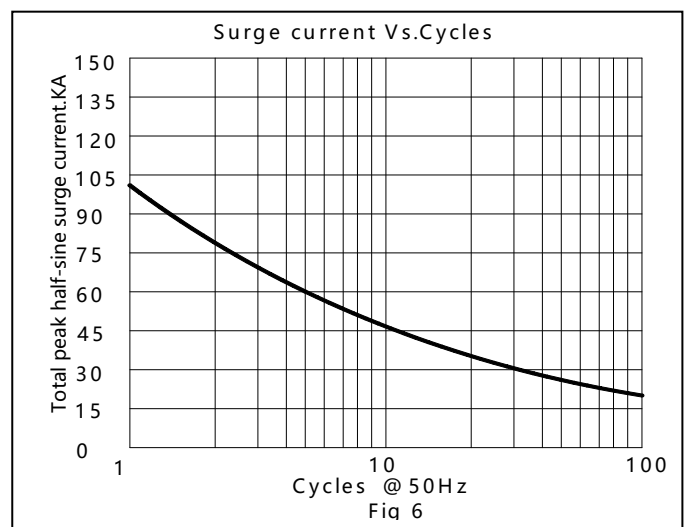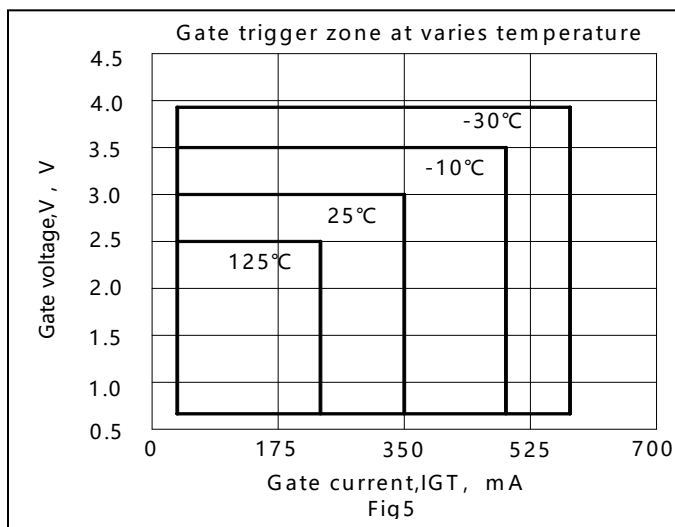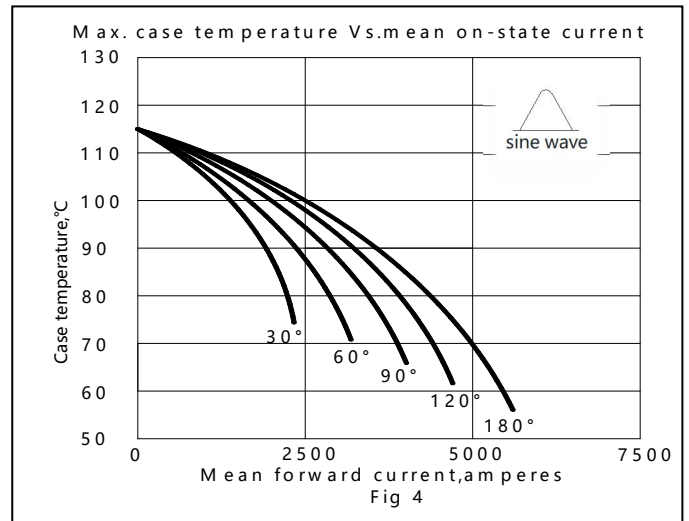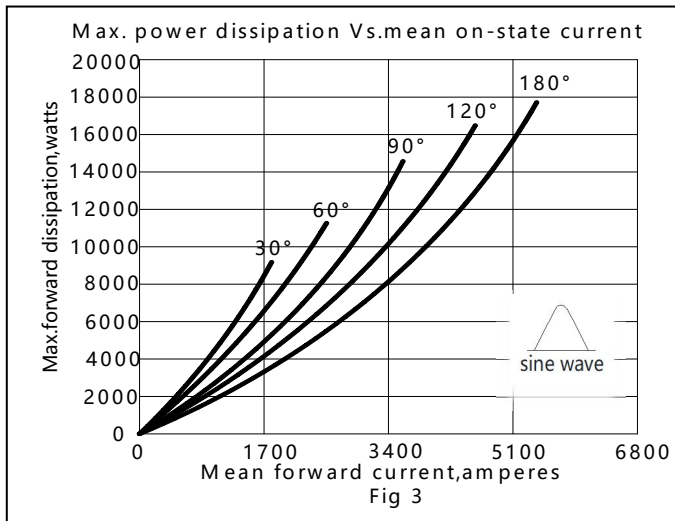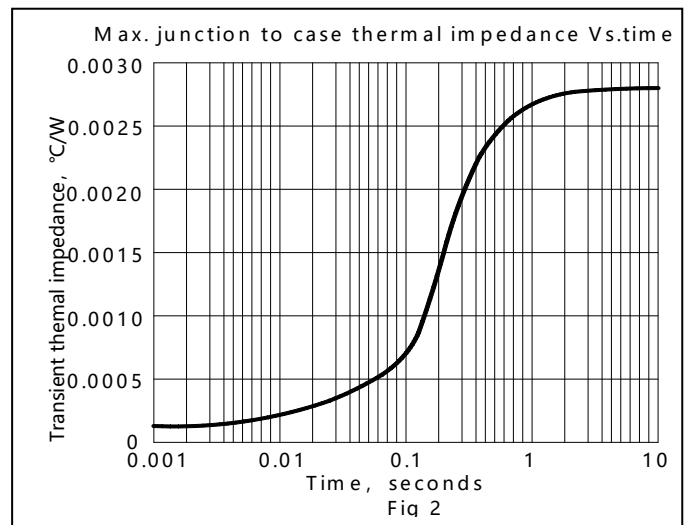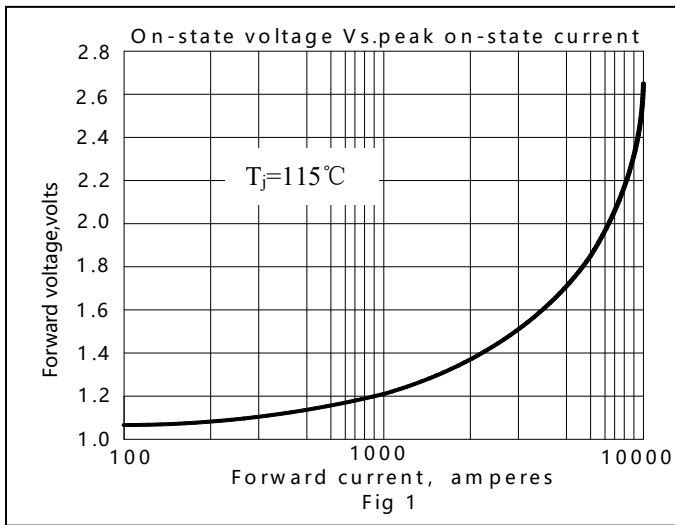

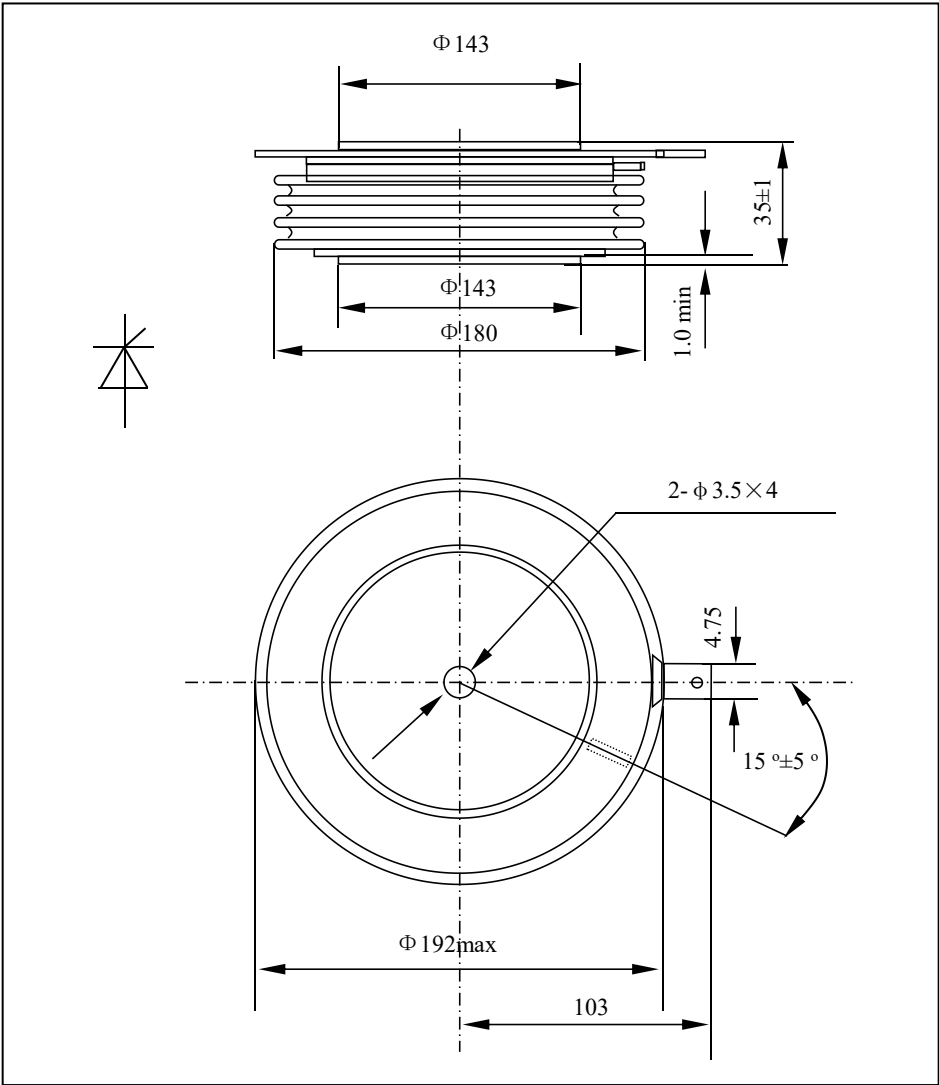

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function, or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <http://www.21yangjie.com> , or consult your nearest Yangjie's sales office for further assistance.