


Dual NPN Small Signal Transistor

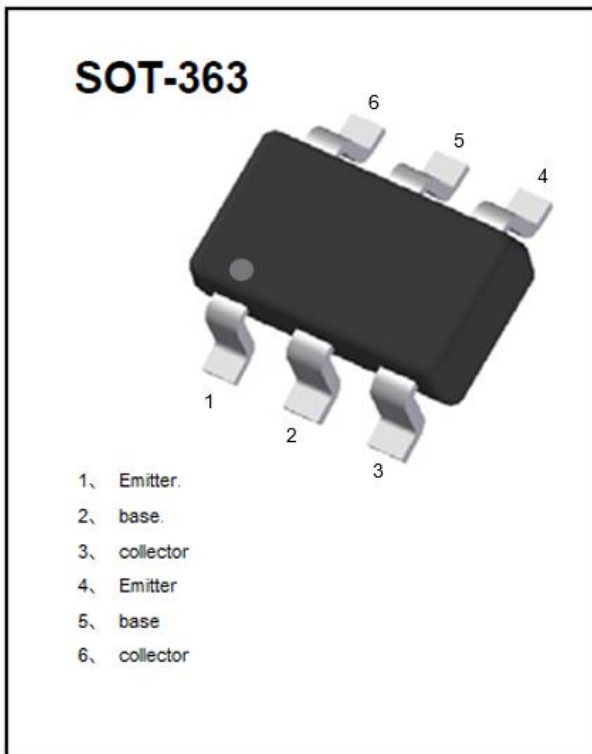


Features

- Epoxy meets UL-94 V-0 flammability rating
- Surface mount package ideally Suited for Automatic Insertion
- NPN
- Moisture Sensitivity Level 1
- Part no. with suffix "Q" means AEC-Q101 qualified

Mechanical Data

- **Package:** SOT-363
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Marking:** K6N

■Equivalent circuit

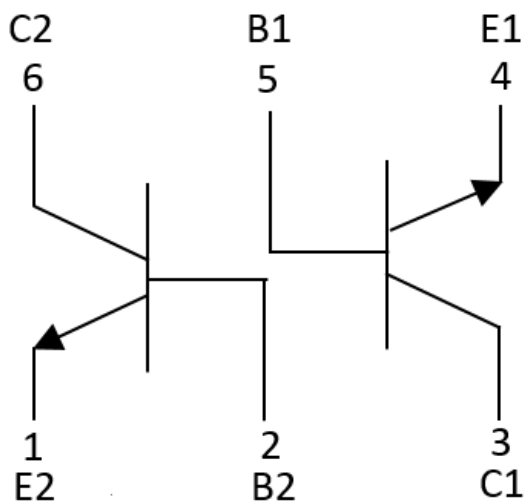



MMDT3904Q

■ Maximum Ratings (Ta=25℃ Unless otherwise specified)

Item	Symbol	Unit	Conditions	Value
Collector-Emitter Voltage	V_{CEO}	V	$I_C=1mA, I_B=0$	40
Collector-Base Voltage	V_{CBO}	V	$I_C=10\mu A, I_E=0$	60
Emitter-Base Voltage	V_{EBO}	V	$I_E=10\mu A, I_C=0$	6
Collector Current	I_C	mA		200
Collector Power Dissipation	P_C	mW		200
Thermal Resistance Junction to Ambient	R_{thJA}	K/W		625
Junction Temperature	T_J	℃		-55 to +150
Storage Temperature	T_{stg}	℃		-55 to +150

(*) Device mounted on FR-4 PCB 1.0 x 1.0 x 0.06 inch

■ Electrical Characteristics (Ta=25℃ unless otherwise specified)

Item	Symbol	Unit	Conditions	Min	TYP	Max
Collector-base breakdown voltage	V_{CBO}	V	$I_C=10\mu A, I_E=0$	60		
Collector-emitter breakdown voltage	V_{CEO}	V	$I_C=1mA, I_B=0$	40		
Emitter-base breakdown voltage	V_{EBO}	V	$I_E=10\mu A, I_C=0$	6		
Collector-Base cut-off current	I_{CBO}	nA	$V_{CB}=30V, I_E=0$			50
Collector-Emitter cut-off current	I_{CEO}	nA	$V_{CE}=30V, I_B=0$			50
Emitter-Base Cut-off current	I_{EBO}	nA	$V_{EB}=5V, I_C=0$			50
DC current gain	$h_{FE(1)}$		$V_{CE}=1V, I_C=10mA$	100		300
	$h_{FE(2)}$		$V_{CE}=1V, I_C=50mA$	60		
Collector-emitter saturation voltage	$V_{CE(sat)}$	V	$I_C=10mA, I_B=1mA$			0.2
			$I_C=50mA, I_B=5mA$			0.3
Baser-emitter saturation voltage	$V_{BE(sat)}$	V	$I_C=10mA, I_B=1mA$	0.65		0.85
			$I_C=50mA, I_B=5mA$			0.95
Collector-base Output Capacitance	C_{obo}	pF	$V_{CB}=5.0Vdc, f=1.0MHz, I_E=0$			4
Transition frequency	f_T	MHz	$V_{CE}=20V, I_C=10mA, f=100MHz$	300		
Noise figure	NF	dB	$V_{CE}=5V, I_C=0.1mA, f=1kHz, R_g=1K\Omega$			5

■ Ordering Information (Example)

PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MMDT3904Q	F2	Approximate 0.009g	3000	30000	120000	7" reel



■ Characteristics (Typical)

Fig.1 - Static Characteristic

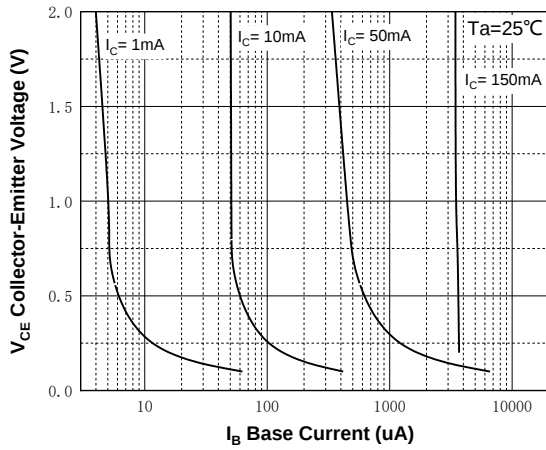


Fig.2 - DC Current Gain

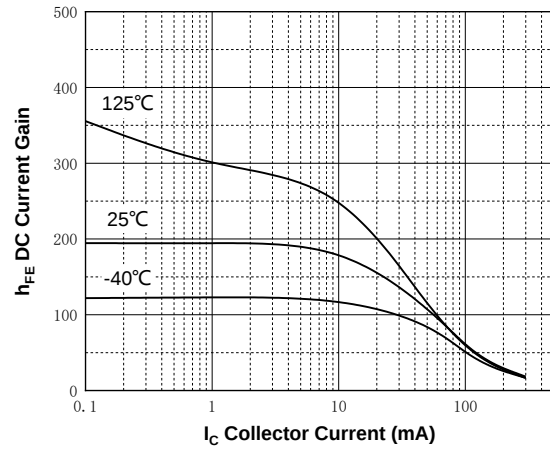


Fig.3 - Collector-Emitter Saturation Voltage

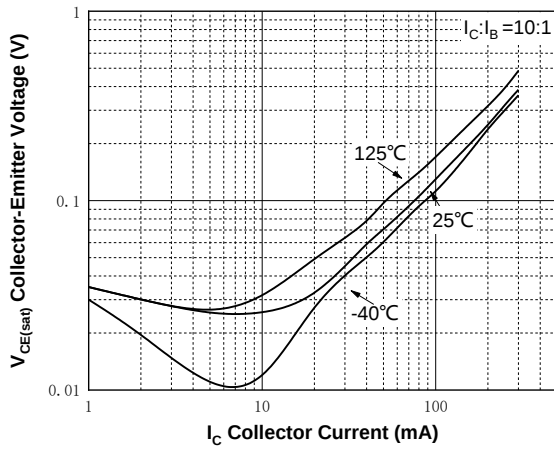


Fig.4 - Base-Emitter Saturation Voltage



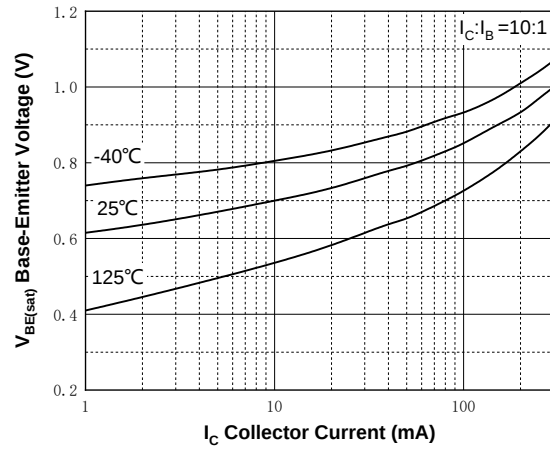


Fig.5 - Capacitance



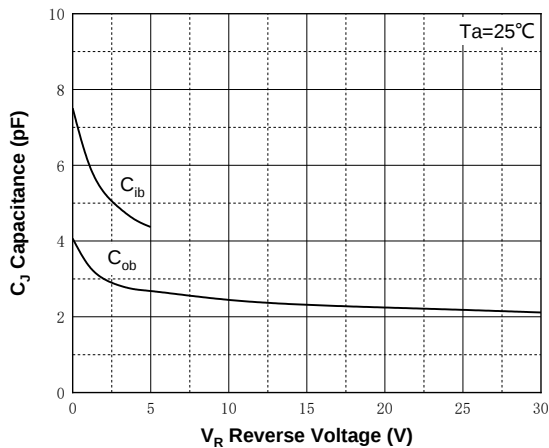


■SOT-363 Package Outline Dimensions

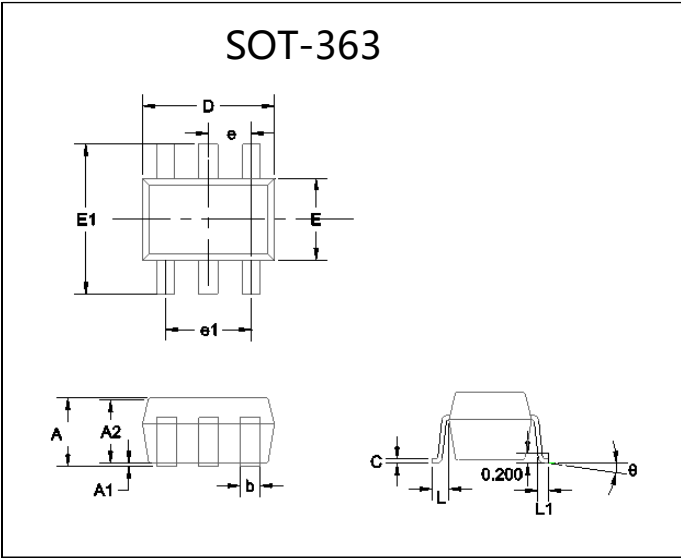

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	0.035	0.043	0.90	1.10	
A1	0.000	0.004	0.00	0.10	
A2	0.035	0.039	0.90	1.00	
b	0.006	0.014	0.15	0.35	
c	0.002	0.010	0.05	0.25	
D	0.071	0.087	1.80	2.20	
E	0.045	0.053	1.15	1.35	
E1	0.085	0.096	2.15	2.45	
e	0.026Typ		0.65Typ		
e1	0.047	0.055	1.20	1.40	
L	0.021Typ		0.525Typ		
L1	0.010	0.018	0.26	0.46	
θ	0°	8°	0°	8°	

■SOT-363 Soldering Footprint

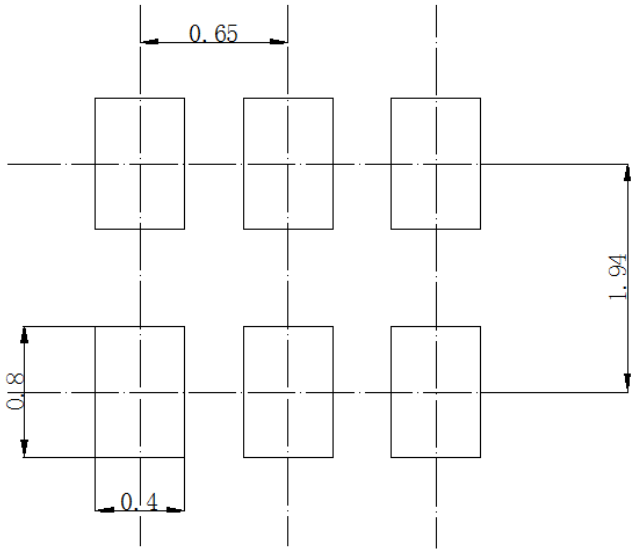

Unit: mm



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, life-saving, lifesustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.