




## Applications

- Power Converters
- Lighting Control
- DC Motor Control and Drives
- Heat and temperature control

## Features

- International standard package
- High Surge Capability
- Simple Mounting

## Internal Circuit

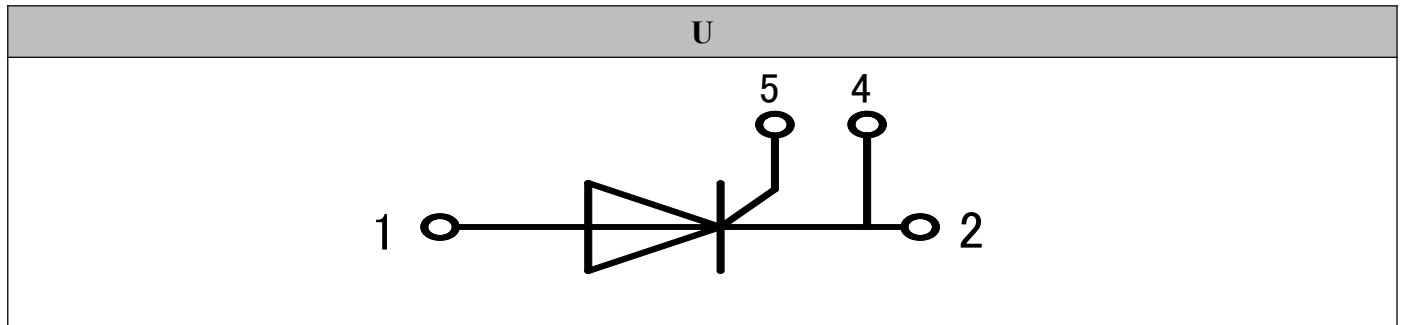

## Blocking - Off State

| TYPE       | V <sub>DRM</sub> /V <sub>RRM</sub> | V <sub>DSM</sub> /V <sub>RSM</sub> | Units |
|------------|------------------------------------|------------------------------------|-------|
| MT800U20I6 | 2000                               | 2200                               | V     |
| MT800U22I6 | 2200                               | 2400                               | V     |
| MT800U25I6 | 2500                               | 2700                               | V     |

## Maximum Ratings

| Symbol           | Conditions                                                                                                             | Values     | Units            |
|------------------|------------------------------------------------------------------------------------------------------------------------|------------|------------------|
| I <sub>TAV</sub> | Sine 180°;T <sub>c</sub> =85℃                                                                                          | 800        | A                |
| I <sub>TSM</sub> | T <sub>VJ</sub> =125℃ t=10ms, sine                                                                                     | 16000      | A                |
| I <sup>2</sup> t | T <sub>VJ</sub> =125℃ t=10ms, sine                                                                                     | 1280000    | A <sup>2</sup> s |
| Visol            | a.c.50HZ;r.m.s.;1min,I <sub>iso</sub> :2mA(MAX)                                                                        | 3000       | V                |
| T <sub>vj</sub>  |                                                                                                                        | -40 to 125 | ℃                |
| T <sub>stg</sub> |                                                                                                                        | -40 to 125 | ℃                |
| M <sub>t</sub>   | To terminals(M12)                                                                                                      | 14±15%     | Nm               |
| M <sub>s</sub>   | To heatsink(M6)                                                                                                        | 8±15%      | Nm               |
| di/dt            | T <sub>VJ</sub> = T <sub>VJM</sub> ,V <sub>DM</sub> ≤2/3V <sub>DRM</sub> , I <sub>GM</sub> =1.5A t <sub>r</sub> ≤1.5μs | 100        | A/μs             |
| dv/dt            | T <sub>VJ</sub> = T <sub>VJM</sub> ,2/3V <sub>DRM</sub> , linear voltage rise                                          | 1000       | V/μs             |
| Weight           | Module(Approximately)                                                                                                  | 2680       | g                |

## Thermal Characteristics

| Symbol               | Conditions | Values | Units |
|----------------------|------------|--------|-------|
| R <sub>th(j-c)</sub> | per chip   | 0.042  | ℃/W   |
| R <sub>th(c-h)</sub> | per chip   | 0.03   | ℃/W   |



## Electrical Characteristics

| Symbol            | Conditions                                                       | Values |      |      | Units      |
|-------------------|------------------------------------------------------------------|--------|------|------|------------|
|                   |                                                                  | Min.   | Typ. | Max. |            |
| $V_{TM}$          | $T=25^{\circ}\text{C}$ $I_{TM}=2400\text{A}$                     |        |      | 1.5  | V          |
| $I_{RRM}/I_{DRM}$ | $T_{VJ}=T_{VJM}$ , $V=V_{RRM}$ , $V=V_{DRM}$                     |        |      | 65   | mA         |
| $V_{TO}$          | $T_{VJ}=T_{VJM}$                                                 |        |      | 0.85 | V          |
| $r_T$             | $T_{VJ}=T_{VJM}$                                                 |        |      | 0.17 | m $\Omega$ |
| $V_{GT}$          | $T_{VJ}=25^{\circ}\text{C}$ , $V_D=12\text{V}$ , $R_L=3\ \Omega$ | 0.8    |      | 2.5  | V          |
| $I_{GT}$          | $T_{VJ}=25^{\circ}\text{C}$ , $V_D=12\text{V}$ , $R_L=3\ \Omega$ | 30     |      | 150  | mA         |
| $I_L$             | $T_{VJ}=25^{\circ}\text{C}$ , $V_D=12\text{V}$ , $R_L=3\ \Omega$ |        |      | 1000 | mA         |
| $I_H$             | $T_{VJ}=25^{\circ}\text{C}$ , $V_D=12\text{V}$ , $R_L=3\ \Omega$ | 20     |      | 150  | mA         |
| $V_{GD}$          | $T_{VJ}=T_{VJM}$ , $V_{DM}=67\%V_{DRM}$                          | 0.2    |      |      | V          |

## Performance Curves

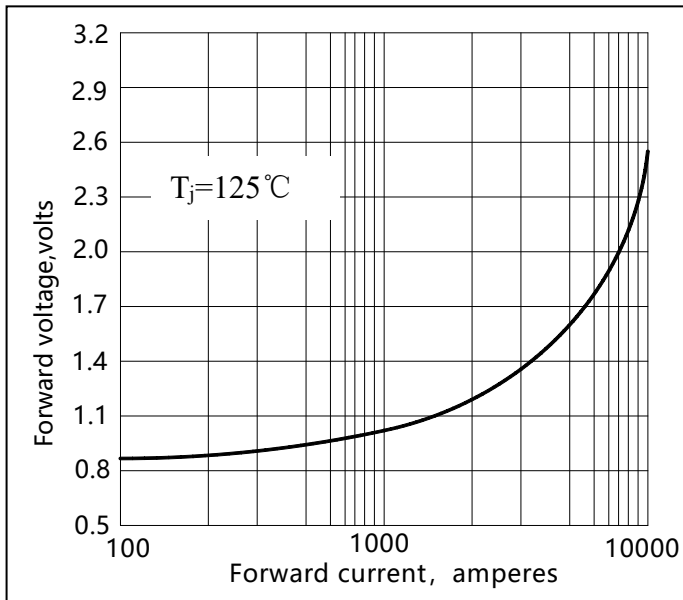


Fig1. Peak On-state Voltage Vs Peak On-state

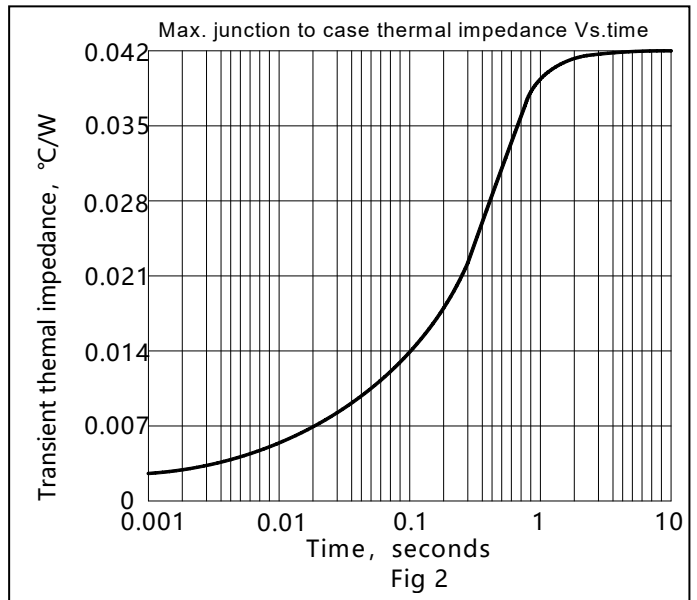


Fig2. Max. junction To case Thermal Impedance Vs Time

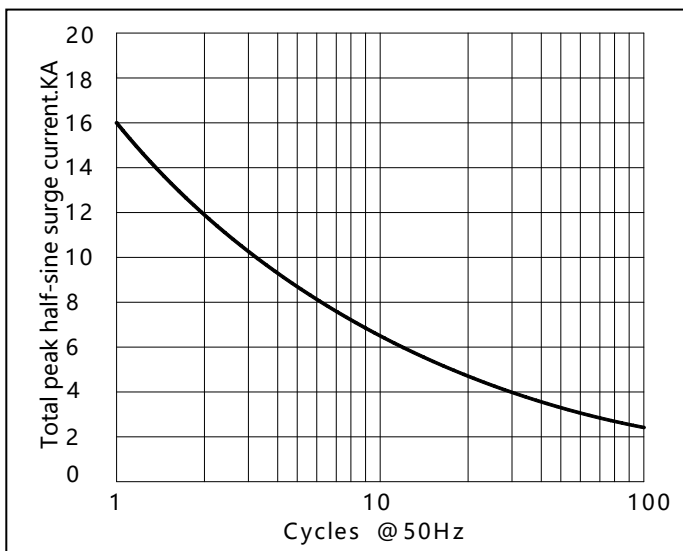


Fig3. Surge Current Vs Cycles

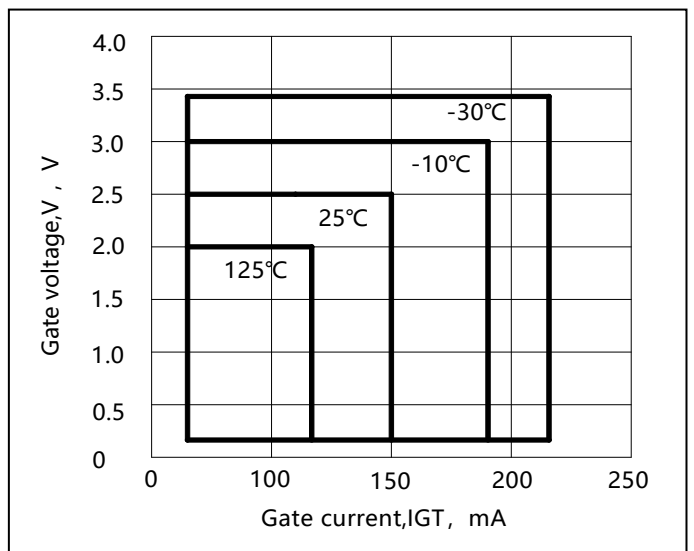
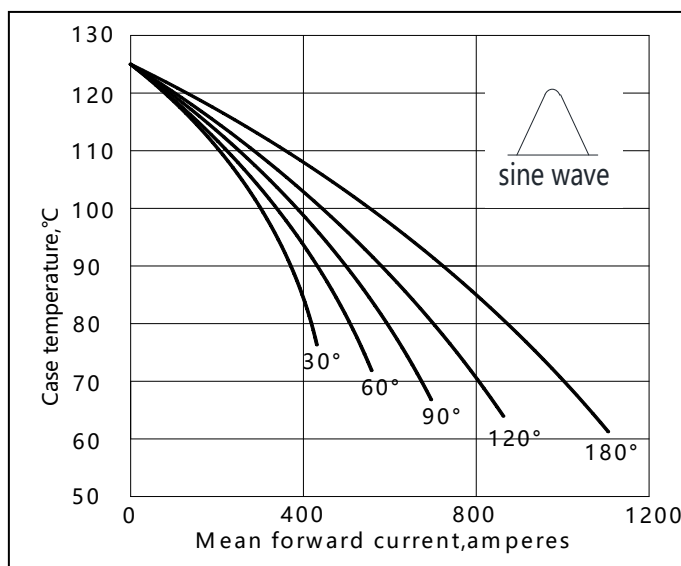


Fig4. Gate Trigger Zone Vs temperature



**Fig6. Max case Temperature Vs Mean On-state Current**

## Package Outline Information

[illegible]

**Unmarked dimensional tolerance:  $\pm 0.5\text{mm}$**



## Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function, or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <http://www.21yangjie.com>, or consult your nearest Yangjie's sales office for further assistance.