

Surface Mount Transient Voltage Suppressors



DO-218AB

Features

- $T_J = 175^\circ\text{C}$ capability suitable for high reliability and automotive requirement
- 6600 W peak pulse power capability with a 10/1000 μs waveform, repetitive rate (duty cycle):0.01 %
- Meet ISO 7637-2 5a/5b and ISO 16750 load dump test (varied by test condition)
- Part no. with suffix "Q" means AEC-Q101 qualified
- Low leakage current
- Low forward voltage drop
- Excellent clamping capability
- Very fast response time
- RoHS compliant


Applications

- Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting, especially for automotive load dump protection application.

Uni-directional



Bi-directional



Mechanical Data

- Case: DO-218AB
- Molding compound: UL94V-0 flammability
- Polarity: Heatsink is anode

■Maximum Ratings ($T_A=25^\circ\text{C}$ Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	Value
Peak power dissipation with a 10/1000 μs waveform	P_{PPM}	W	6600
Peak power dissipation with a 10/10,000 μs waveform	P_{PPM}	W	5200
Peak pulse current with a 10/1000 μs waveform (1)	I_{PPM}	A	See Next Table
Power dissipation on infinite heatsink at $T_L = 25^\circ\text{C}$ (Fig 1)	P_D	W	8.0
Typical thermal resistance, junction to case	$R_{\theta JC}$	$^\circ\text{C/W}$	0.9
Peak forward surge current 8.3 ms single half sine-wave	I_{FSM}	A	700
Operating junction and storage temperature range	T_J, T_{STG}	$^\circ\text{C}$	- 55 to +175

Note:

(1) Non-repetitive current pulse per Fig.2 and derated above $T_A = 25^\circ\text{C}$



SM8S10AQ THRU SM8S85CAQ

■ Thermal Characteristics (T_a=25°C Unless otherwise specified)

Part Number		Breakdown Voltage V _{BR} @IT			Maximum Reverse Leakage IR @V _{RWM} (uA)	Maximum IR @VRWM T _J =175 (uA)	Working Peak Reverse Voltage V _{RWM} (V)	Maximum Reverse Surge Current I _{PP} (A) (Fig.2)	Maximum Clamping Voltage VC @I _{PP} (V)
		Min (V)	Max (V)	IT (mA)					
Uni	Bi								
SM8S10AQ	-	11.10	12.30	5.0	15	250	10	388.0	17.0
SM8S11AQ	-	12.20	13.50	5.0	10	150	11	363.0	18.2
SM8S12AQ	-	13.30	14.70	5.0	10	150	12	332.0	19.9
SM8S13AQ	-	14.40	15.90	5.0	10	150	13	307.0	21.5
SM8S14AQ	SM8S14CAQ	15.60	17.20	5.0	10	150	14	284.0	23.2
SM8S15AQ	SM8S15CAQ	16.70	18.50	5.0	10	150	15	270.0	24.4
SM8S16AQ	SM8S16CAQ	17.80	19.70	5.0	10	150	16	254.0	26.0
SM8S17AQ	SM8S17CAQ	18.90	20.90	5.0	10	150	17	239.0	27.6
SM8S18AQ	SM8S18CAQ	20.00	22.10	5.0	10	150	18	226.0	29.2
SM8S20AQ	SM8S20CAQ	22.20	24.50	5.0	10	150	20	204.0	32.4
SM8S22AQ	SM8S22CAQ	24.40	26.90	5.0	10	150	22	186.0	35.5
SM8S24AQ	SM8S24CAQ	26.70	29.50	5.0	10	150	24	170.0	38.9
SM8S26AQ	SM8S26CAQ	28.90	31.90	5.0	10	150	26	157.0	42.1
SM8S28AQ	SM8S28CAQ	31.10	34.40	5.0	10	150	28	145.0	45.4
SM8S30AQ	SM8S30CAQ	33.30	36.80	5.0	10	150	30	136.0	48.4
SM8S33AQ	SM8S33CAQ	36.70	40.60	5.0	10	150	33	124.0	53.3
SM8S36AQ	SM8S36CAQ	40.00	44.20	5.0	10	150	36	114.0	58.1
SM8S40AQ	SM8S40CAQ	44.40	49.10	5.0	10	150	40	102.0	64.5
SM8S43AQ	SM8S43CAQ	47.80	52.80	5.0	10	150	43	95.1	69.4
SM8S45AQ	SM8S45CAQ	50.00	55.30	5.0	10	150	45	90.8	72.7
SM8S48AQ	SM8S48CAQ	53.30	58.90	5.0	10	150	48	85.3	77.4
SM8S51AQ	SM8S51CAQ	56.70	62.70	5.0	10	150	51	80.1	82.4
SM8S54AQ	SM8S54CAQ	60.00	66.30	5.0	10	150	54	75.8	87.1
SM8S58AQ	SM8S58CAQ	64.40	71.20	5.0	10	150	58	70.5	93.6
SM8S60AQ	SM8S60CAQ	66.70	73.70	5.0	10	150	60	68.2	96.8
SM8S64AQ	SM8S64CAQ	71.10	78.60	5.0	10	150	64	64.1	103.0
SM8S70AQ	SM8S70CAQ	77.80	86.00	5.0	10	150	70	58.4	113.0
SM8S75AQ	SM8S75CAQ	83.30	92.10	5.0	10	150	75	54.6	121.0
SM8S78AQ	SM8S78CAQ	86.70	95.80	5.0	10	150	78	52.4	126.0
SM8S80AQ	SM8S80CAQ	88.80	97.60	5.0	10	150	80	50.9	129.6
SM8S85AQ	SM8S85CAQ	94.40	104.00	5.0	10	150	85	48.2	137.0

Note:

- 1.Surge current waveform is defined at 10/1000us waveform
- 2.For all types maximum V_F = 1.8 V at I_F = 100 A measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum



SM8S10AQ THRU SM8S85CAQ

■ Characteristics (Typical)

FIG.1 Pulse Derating Curve

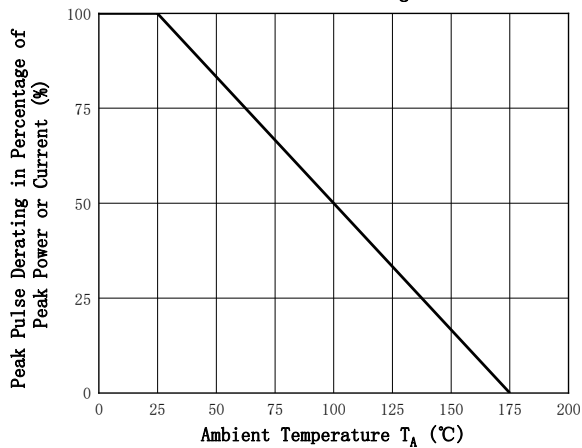


FIG.2 Pulse Waveform

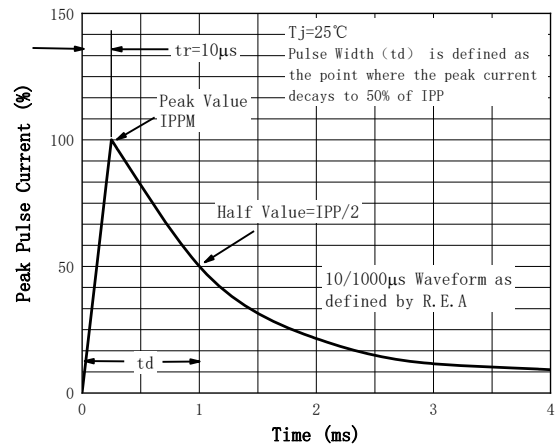


FIG.3 Steady State Power Derating Curve


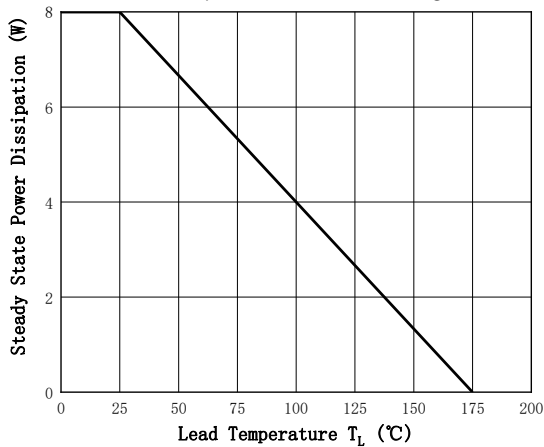


FIG.4 Peak Pulse Power Rating Curve



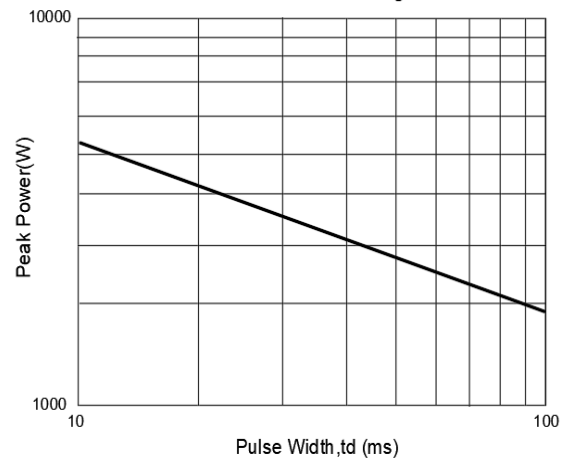

SM8S10AQ THRU SM8S85CAQ

■ TYPICAL LOAD DUMP CAPABILITY AT ISO 16750-2 PULSE 5a WITH 12 V BATTERY SYSTEM (TA = 25 °C)

Condititon	Us(V)	Ri(Ω)	Td(ms)
Device type			
SM8S18AQ/CAQ	101	1	400
SM8S20AQ/CAQ			
SM8S22AQ/CAQ			
SM8S24AQ/CAQ			
SM8S26AQ/CAQ			
SM8S28AQ/CAQ			

■ TYPICAL LOAD DUMP CAPABILITY AT ISO 16750-2 PULSE 5a WITH 24 V BATTERY SYSTEM (TA = 25 °C)

Condititon	Us(V)	Ri(Ω)	Td(ms)
Device type			
SM8S30AQ/CAQ	151	2	350
SM8S33AQ/CAQ			
SM8S36AQ/CAQ			
SM8S40AQ/CAQ			

■ TYPICAL LOAD DUMP CAPABILITY AT ISO 16750-2 PULSE 5b WITH 12 V BATTERY SYSTEM (TA = 25 °C)

Condititon	Us(V)	Us*(V)	Ri(Ω)	Td(ms)
Device type				
SM8S18AQ/CAQ	101	35	1	400
SM8S20AQ/CAQ				
SM8S22AQ/CAQ				
SM8S24AQ/CAQ				
SM8S26AQ/CAQ				
SM8S28AQ/CAQ				

■ TYPICAL LOAD DUMP CAPABILITY AT ISO 16750-2 PULSE 5b WITH 24 V BATTERY SYSTEM (TA = 25 °C)

Condititon	Us(V)	Us*(V)	Ri(Ω)	Td(ms)
Device type				
SM8S30AQ/CAQ	151	65	1	200
SM8S33AQ/CAQ				
SM8S36AQ/CAQ				
SM8S40AQ/CAQ				




SM8S10AQ THRU SM8S85CAQ

■ Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
SM8S10AQ-SM8S85AQ SM8S14CAQ-SM8S85CAQ	F1	Approximate 2.86	750	750	3750	13"reel

■ Marking Information

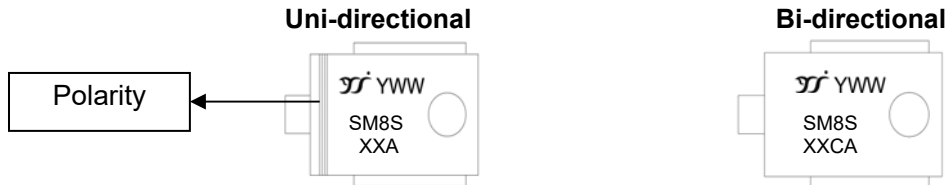

Note:


1. All marking is at middle of the product body
2. All marking is in laser printing
3. XXX is marking code, like 85A/85 CA marking code is 85
4. Body color: Black
5. YWW is date code, "Y" is year. "WW" is week.

For instance:

The 17th week of 2025, date code is 517


The 17th week of 2026, date code is 617

■ Outline Dimensions

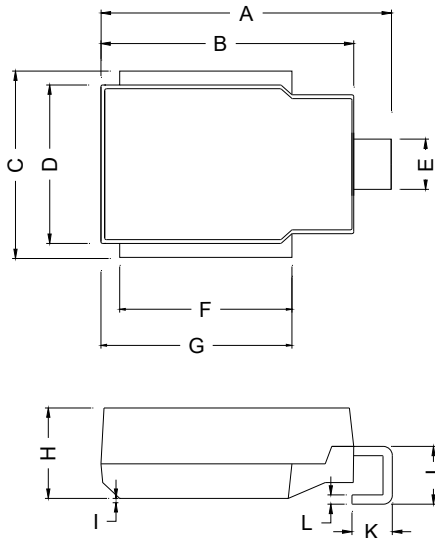

DO-218AB		
DIM	MIN (mm)	MAX(mm)
A	15.00	16.00
B	13.30	13.70
C	9.50	10.50
D	8.30	8.70
E	2.40	3.00
F	8.90	9.50
G	9.90	10.50
H	4.70	5.00
I	0.00	0.18
J	2.50	3.50
K	1.80	2.80
L	0.50	0.70

■ Suggested pad layout

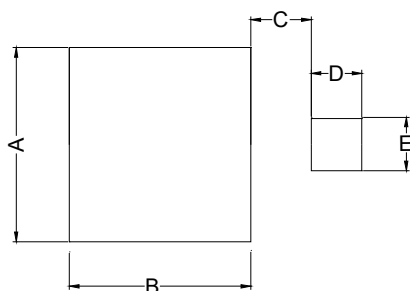

DO-218AB		
DIM	MIN (mm)	MAX(mm)
A	9.50	10.50
B	9.00	9.60
C	2.80	3.40
D	2.30	2.90
E	2.40	3.00



SM8S10AQ THRU SM8S85CAQ

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, lifesaving, lifesustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.