



PNP General Purpose Transistor



SOT-23



Features

- Epoxy meets UL-94 V-0 flammability rating and halogen free
- Moisture Sensitivity Level 1
- Low collector-emitter saturation voltage
- High current capabilities
- High collector current gain (h_{FE}) at high I_C
- High efficiency due to less heat generation
- Part no. with suffix "Q" means AEC-Q101 qualified

Applications

- General purpose switching and muting
- LCD backlighting
- Supply line switching circuits
- Battery driven equipment

Mechanical Data

- **Case:** SOT-23
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Marking:** 2H.

■ Maximum Ratings ($T_a=25^\circ\text{C}$ Unless otherwise specified)

Item	Symbol	Unit	Value
Collector-Base Voltage	V_{CBO}	V	-40
Collector-Emitter Voltage	V_{CEO}	V	-40
Emitter-Base Voltage	V_{EBO}	V	-5
Collector Current -Continuous	I_C	A	-1
Total Device Dissipation	P_D	mW	300
Thermal Resistance Junction to Ambient	R_{thJA}	$^\circ\text{C}/\text{W}$	417
Junction Temperature	T_j	$^\circ\text{C}$	-55 to +150
Storage Temperature	T_{STG}	$^\circ\text{C}$	-55 to +150

■ Electrical Characteristics ($T_a=25^\circ\text{C}$ Unless otherwise specified)

Item	Symbol	Unit	Conditions	Min	Typ	Max
Collector-base breakdown voltage	V_{CBO}	V	$I_C = -100\mu\text{A}$, $I_E = 0$	-40		
Collector-emitter breakdown voltage	V_{CEO}	V	$I_C = -2\text{mA}$, $I_B = 0$	-40		
Emitter-base breakdown voltage	V_{EBO}	V	$I_E = -100\mu\text{A}$, $I_C = 0$	-5		



Collector-base cut-off current	I_{CBO}	nA	$V_{CB} = -40V, I_E = 0$			-100
Collector-emitter cut-off current	I_{CES}	nA	$V_{CE} = -30V$			-100
Emitter-base cut-off current	I_{EBO}	nA	$V_{EB} = -5V, I_C = 0$			-100
DC current gain	h_{FE}		$V_{CE} = -5V, I_C = -1mA$	300		
	h_{FE}		$V_{CE} = -5V, I_C = -100mA$	300		800
	h_{FE}		$V_{CE} = -5V, I_C = -500mA$	250		
	h_{FE}		$V_{CE} = -5V, I_C = -1A$	160		
Collector-emitter saturation voltage	$V_{CE(sat)}$	V	$I_C = -100mA, I_B = -1mA$			-0.2
	$V_{CE(sat)}$	V	$I_C = -500mA, I_B = -50mA$			-0.25
	$V_{CE(sat)}$	V	$I_C = -1A, I_B = -100mA$			-0.5
Base-emitter saturation voltage	$V_{BE(sat)}$	V	$I_C = -1A, I_B = -50mA$			-1.1
Base-emitter voltage	V_{BE}	V	$V_{CE} = -5V, I_C = -1A$			-1.0
Collector-base output capacitance	C_{ob}	pF	$V_{CB} = -10V, f = 1MHz$			16
Transition frequency	f_T	MHz	$V_{CE} = -10V, I_C = -50mA, f = 100MHz$	150		

■ Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
YJBS5140TQ	F2	Approximate 0.010	3000	30000	120000	7" reel

■ Characteristics (Typical)

Fig.1 - Collector Saturation Region

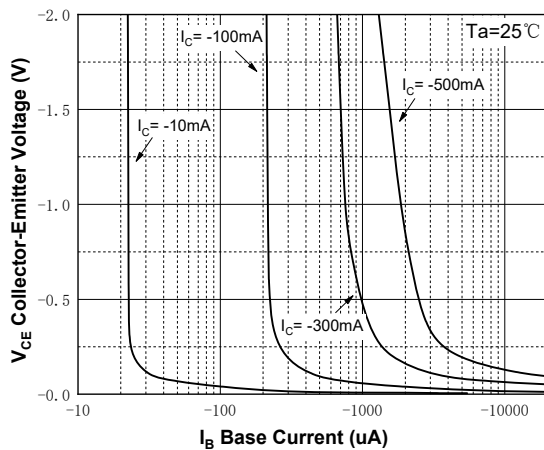


Fig.2 - DC Current Gain

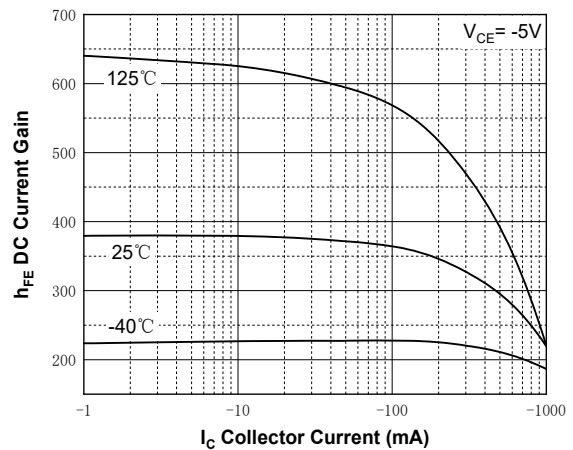


Fig.3 - Collector-Emitter Saturation Voltage vs. Collector Current

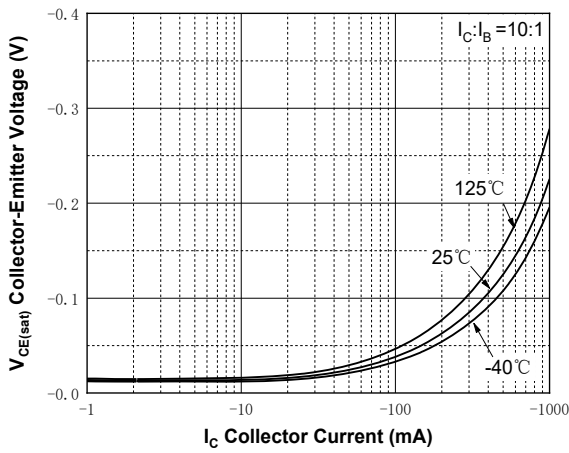


Fig.4 - Collector-Emitter Saturation Voltage vs. Collector Current

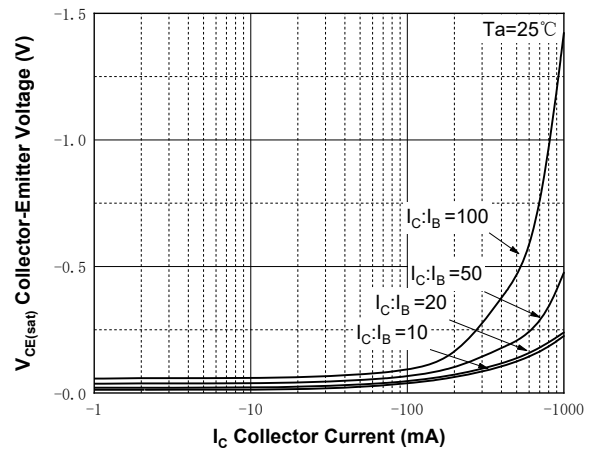


Fig.5 - Base-Emitter Saturation Voltage vs. Collector Current

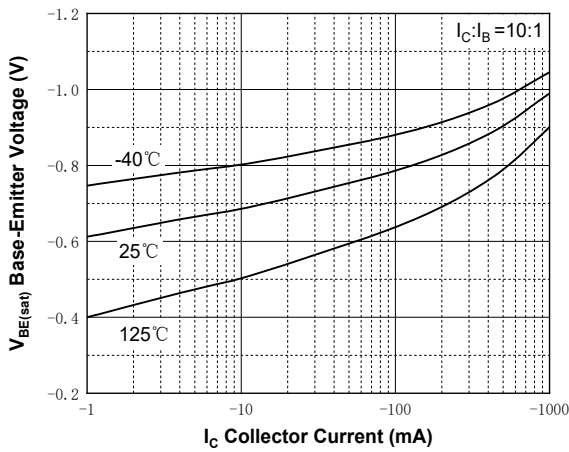


Fig.6 - Capacitance






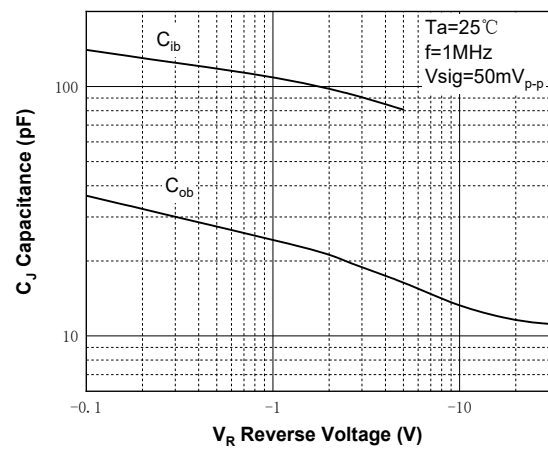


Fig.7 - Base-Emitter Turn-on Voltage vs. Collector Current

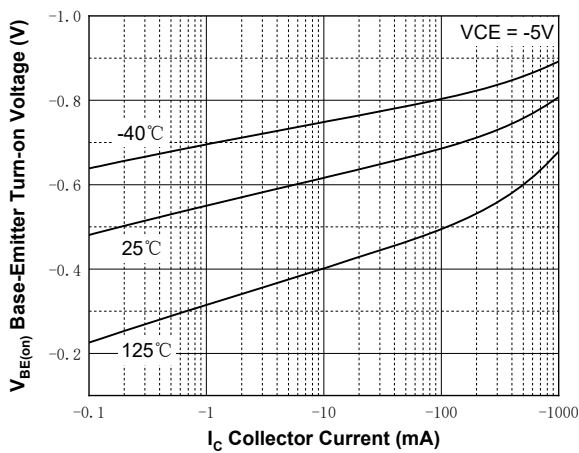

■SOT-23 Package Outline Dimensions & Suggested Pad Layout




UNIT: mm

SYMBOL	DIMENSIONS			
	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.035	0.045	0.900	1.150
A1	0.000	0.004	0.000	0.100
A2	0.035	0.041	0.900	1.050
b	0.012	0.020	0.300	0.500
c	0.004	0.008	0.100	0.200
D	0.110	0.118	2.800	3.000
E	0.047	0.055	1.200	1.400
E1	0.089	0.100	2.250	2.550
e	0.037TYP		0.950TYP	
e1	0.071	0.079	1.800	2.000
L	0.022REF		0.550REF	
L1	0.012	0.020	0.300	0.500
θ	0°	8°	0°	8°

NOTE:

- 1.PACKAGE BODY SIZES EXCLUDE MOLD FLASH AND GATE BURRS.
- 2.TOLERANCE 0.1mm UNLESS OTHERWISE SPECIFIED.
- 3.THE PAD LAYOUT IS FOR REFERENCE PURPOSES ONLY.

■ Marking Information

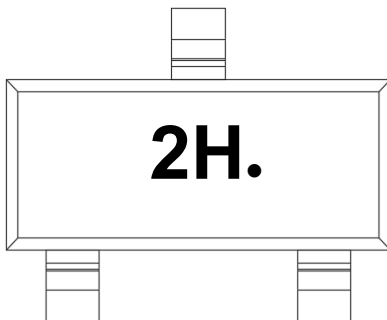

Note:

1. All marking is at middle of the product body
2. All marking is in laser marking
3. 2H is Marking Code
4. Body color: Black



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, life-saving, lifesustaining, or military. Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.