

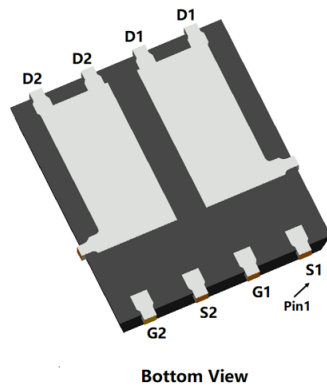


N-Channel and P-Channel Complementary MOSFET

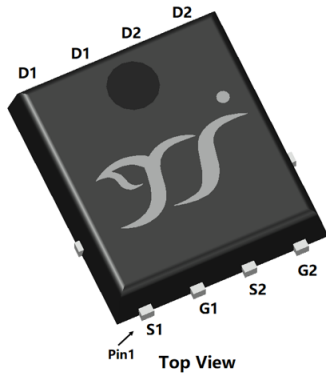

PDFN5060-8L

Product Summary

NMOS

- V_{DS} 30V
- I_D 23A
- $R_{DS(ON)}$ (at $V_{GS}=10V$) $<18m\Omega$
- $R_{DS(ON)}$ (at $V_{GS}=4.5V$) $<31m\Omega$

PMOS

- V_{DS} -30V
- I_D -30A
- $R_{DS(ON)}$ (at $V_{GS}=-10V$) $<18m\Omega$
- $R_{DS(ON)}$ (at $V_{GS}=-4.5V$) $<26m\Omega$
- 100% EAS Tested
- 100% ∇V_{DS} Tested

General Description

- Excellent package for heat dissipation
- High density cell design for low $R_{DS(ON)}$
- Moisture Sensitivity Level 1
- Epoxy Meets UL 94 V-0 Flammability Rating
- Halogen Free

Applications

- Load switching
- Hard switched and high frequency circuits
- Uninterruptible power supply

Limiting Values

Parameter	Conditions			Symbol	NMOS		PMOS		Unit		
					Min	Max	Min	Max			
Drain-source Voltage				V _{DS}	-	30	-	-30	V		
Gate-source Voltage				V _{GS}	-20	20	-20	20			
Continuous Drain Current (Note 1,2)	Steady-State	T _A =25°C	NMOS:V _{GS} =10V	I _D	-	8	-	-8.5	A		
			PMOS:V _{GS} =-10V		-	5	-	-5.4			
		T _A =100°C	NMOS:V _{GS} =10V		-	23	-	-30			
			PMOS:V _{GS} =-10V		-	14.5	-	-19			
Continuous Drain Current (Note 1,3)	Steady-State	T _C =25°C	NMOS:V _{GS} =10V, Chip limitation		-	90	-	-120			
			PMOS:V _{GS} =-10V, Chip limitation		-	15	-	20			
		T _C =100°C	NMOS:V _{GS} =10V		-	16.53	-	54.15			
			PMOS:V _{GS} =-10V		-	6.7	-	10.2			
Pulsed Drain Current	T _C =25°C ,t _p ≤10μs			I _{DM}	-	90	-	-120			
Maximum Body-Diode Continuous Current	T _C =25°C			I _S	-	15	-	20			
Avalanche Energy (non- repetitive)	NMOS:T _J =25°C,V _G =10V,R _G =25Ω,L=0.3mH, IAS=10.5A			EAS	-	16.53	-	54.15	mJ		
	PMOS:T _J =25°C,V _G =-10V,R _G =25Ω,L=0.3mH, IAS=-19A										
Total Power Dissipation (Note 1,2)	Steady-State	T _A =25°C	P _D	-	1.95	-	2	W			
		T _A =100°C		-	0.78	-	0.8				
Total Power Dissipation (Note 1,3)	Steady-State	T _C =25°C		-	16.8	-	25.5				
		T _C =100°C		-	6.7	-	10.2				
Junction and Storage Temperature Range				T _J ,T _{STG}	-55	150	-55		150	°C	



YJG018NP03A

■ Thermal Resistance

Parameter		Symbol	NMOS		PMOS		Units
			Typ	Max	Typ	Max	
Thermal Resistance Junction-to-Ambient (Note 2)	Steady-State	$R_{\theta JA}$	-	64	-	62	$^{\circ}C/W$
Thermal Resistance Junction-to-Case	Steady-State	$R_{\theta JC}$	-	7.4	-	4.9	

■ Ordering Information (Example)

PREFERRED P/N	PACKING CODE	Marking	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
YJG018NP03A	F1	YJG018NP03A	5000	10000	100000	13" reel

■ NMOS Electrical Characteristics

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Static Parameter						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V, I _D =250μA, T _J =25℃	30	-	-	V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =30V, V _{GS} =0V, T _J =25℃	-	-	1	μA
		V _{DS} =30V, V _{GS} =0V, T _J =150℃	-	-	100	
Gate-Source Leakage Current	I _{GSS}	V _{GS} =± 20V, V _{DS} =0V, T _J =25℃	-	-	± 100	nA
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA, T _J =25℃	1	1.5	2.5	V
Static Drain-Source On-Resistance	R _{DS(on)}	V _{GS} =10V, I _D =10A, T _J =25℃	-	13.8	18	mΩ
		V _{GS} =4.5V, I _D =8A, T _J =25℃	-	22.6	31	
Diode Forward Voltage	V _{SD}	I _S =10A, V _{GS} =0V, T _J =25℃	-	0.87	1.2	V
Gate Resistance	R _G	f=1MHz, T _J =25℃	-	2	-	Ω
Dynamic Parameters						
Input Capacitance	C _{iss}	V _{DS} =15V, V _{GS} =0V, f=1MHz, T _J =25℃	-	380	-	pF
Output Capacitance	C _{oss}		-	75	-	
Reverse Transfer Capacitance	C _{rss}		-	60	-	
Switching Parameters						
Total Gate Charge	Q _g	V _{GS} =10V, V _{DS} =15V, I _D =10A, T _J =25℃	-	8.3	-	nC
Gate-Source Charge	Q _{gs}		-	1.7	-	
Gate-Drain Charge	Q _{gd}		-	2	-	
Reverse Recovery Charge	Q _{rr}	I _F =10A, di/dt=100A/μs, V _{GS} =0V, V _R =15V, T _J =25℃	-	3.7	-	nC
Reverse Recovery Time	t _{rr}		-	10	-	ns
Turn-on Delay Time	t _{D(on)}	V _{GS} =10V, V _{DS} =15V, I _D =10A, R _{GEN} =3Ω, T _J =25℃	-	6	-	ns
Turn-on Rise Time	t _r		-	3	-	
Turn-off Delay Time	t _{D(off)}		-	13	-	
Turn-off Fall Time	t _f		-	3	-	



YJG018NP03A

■ PMOS Electrical Characteristics

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Static Parameter						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_D=-250\mu A, T_j=25^{\circ}C$	-30	-	-	V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=-30V, V_{GS}=0V, T_j=25^{\circ}C$	-	-	-1	μA
		$V_{DS}=-30V, V_{GS}=0V, T_j=150^{\circ}C$	-	-	-100	
Gate-Source Leakage Current	I_{GSS}	$V_{GS}=\pm 20V, V_{DS}=0V, T_j=25^{\circ}C$	-	-	± 100	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=-250\mu A, T_j=25^{\circ}C$	-1	-1.5	-2.5	V
Static Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS}=-10V, I_D=-10A, T_j=25^{\circ}C$	-	13.7	18	m Ω
		$V_{GS}=-4.5V, I_D=-6A, T_j=25^{\circ}C$	-	19.2	26	
Diode Forward Voltage	V_{SD}	$I_S=-10A, V_{GS}=0V, T_j=25^{\circ}C$	-	-0.87	-1.2	V
Gate Resistance	R_G	$f=1MHz, T_j=25^{\circ}C$	-	15.5	-	Ω
Dynamic Parameters						
Input Capacitance	C_{iss}	$V_{DS}=-15V, V_{GS}=0V, f=1MHz, T_j=25^{\circ}C$	-	1220	-	pF
Output Capacitance	C_{oss}		-	170	-	
Reverse Transfer Capacitance	C_{rss}		-	160	-	
Switching Parameters						
Total Gate Charge	Q_g	$V_{GS}=-10V, V_{DS}=-15V, I_D=-10A, T_j=25^{\circ}C$	-	24	-	nC
Gate-Source Charge	Q_{gs}		-	2	-	
Gate-Drain Charge	Q_{gd}		-	6	-	
Reverse Recovery Charge	Q_{rr}	$I_F=-10A, di/dt=100A/us, V_{GS}=0V, V_R=-15V, T_j=25^{\circ}C$	-	11	-	nC
Reverse Recovery Time	t_{rr}		-	35	-	ns
Turn-on Delay Time	$t_{D(on)}$	$V_{GS}=-10V, V_{DS}=-15V, I_D=-10A, R_{GEN}=2.5\Omega, T_j=25^{\circ}C$	-	11	-	ns
Turn-on Rise Time	t_r		-	4	-	
Turn-off Delay Time	$t_{D(off)}$		-	70	-	
Turn-off Fall Time	t_f		-	50	-	

Note:

1. The entire application environment impacts the thermal resistance values shown, they are not constants and are only valid for the particular conditions noted.
2. The value of $R_{\theta JA}$ is measured with the device mounted on the 40mm*40mm*1.1mm single layer FR-4 PCB board with 1 in² pad of 2oz. Copper, in the still air environment with $T_A=25^\circ C$. The maximum allowed junction temperature of $150^\circ C$. The value in any given application depends on the user's specific board design.
3. Thermal resistance from junction to soldering point (on the exposed drain pad).

■ NMOS Typical Electrical and Thermal Characteristics Diagrams

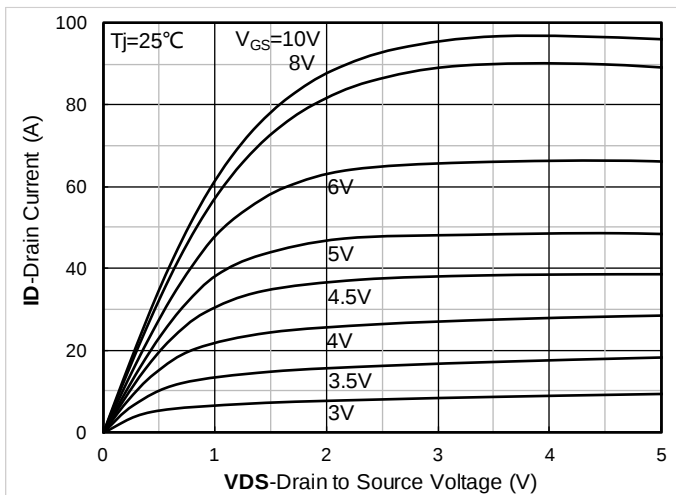


Figure 1. Output Characteristics; typical values

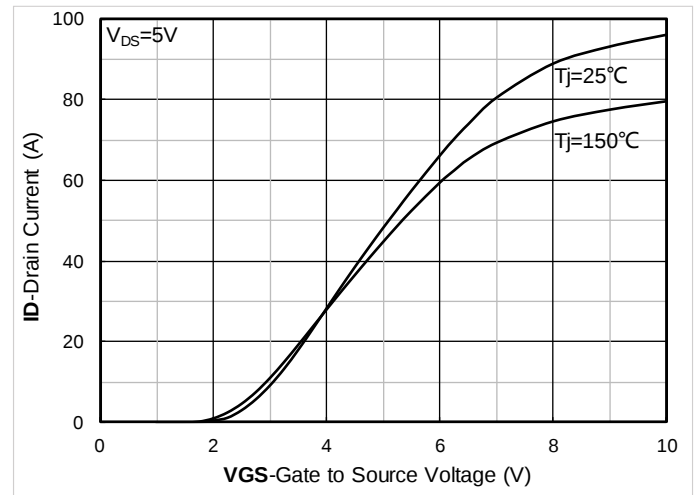


Figure 2. Transfer Characteristics; typical values

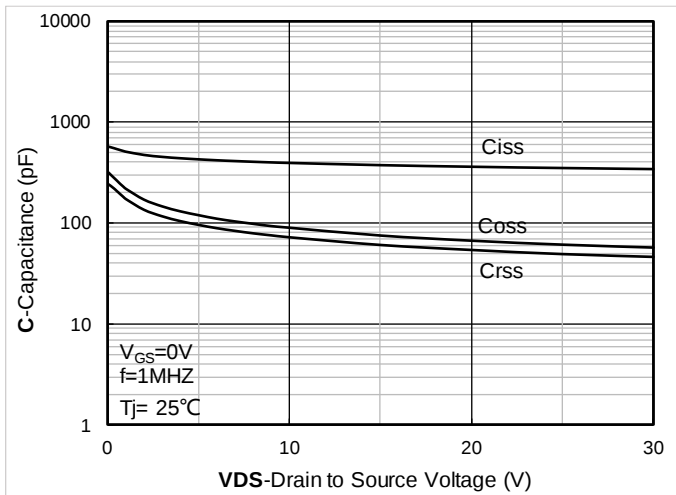


Figure 3. Capacitance Characteristics; typical values

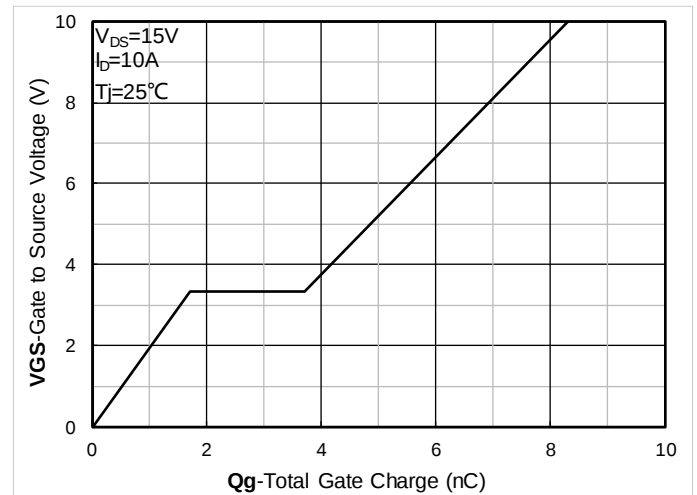


Figure 4. Gate Charge; typical values

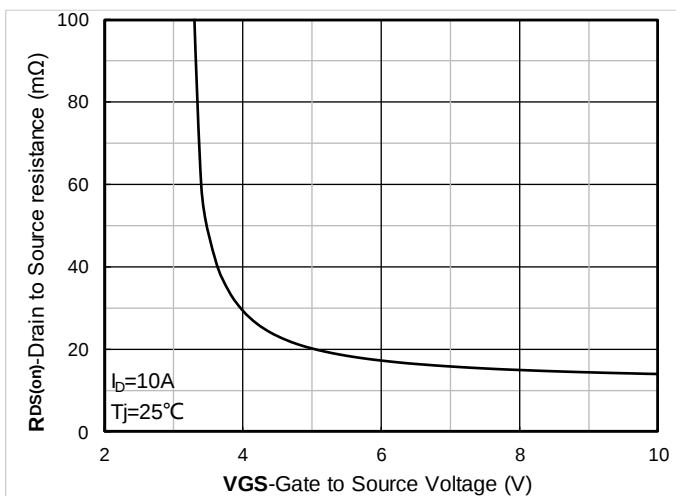


Figure 5. On-Resistance vs. Gate to Source Voltage; typical values

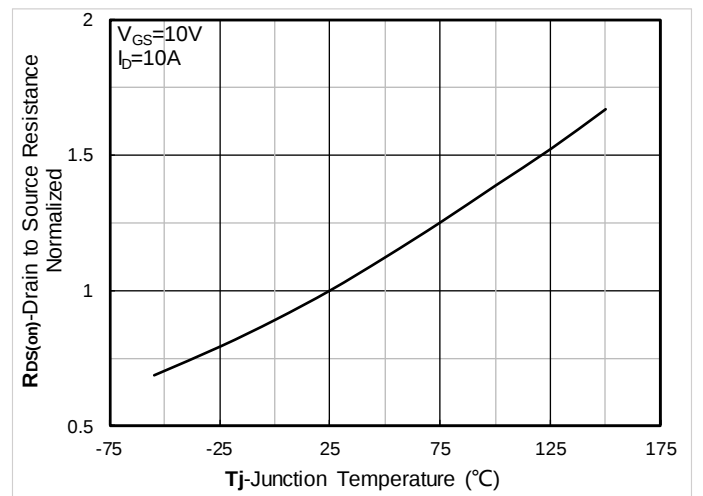


Figure 6. Normalized On-Resistance

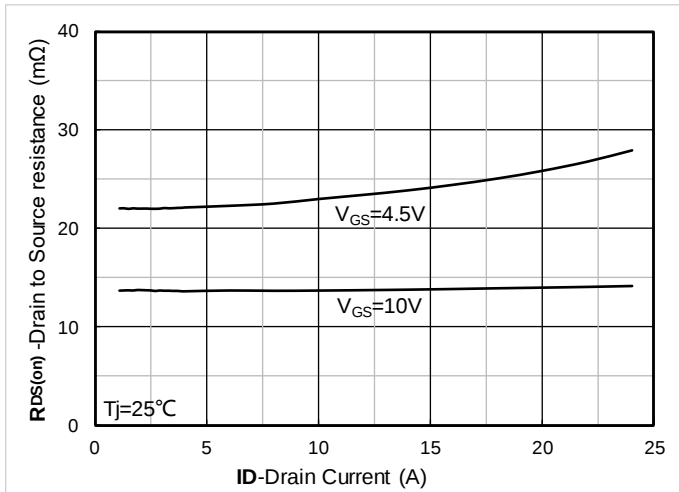


Figure 7. $R_{DS(on)}$ vs. Drain Current; typical values

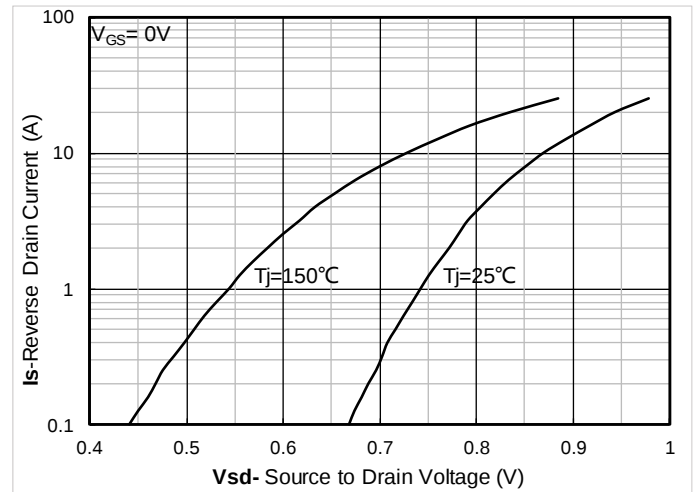


Figure 8. Forward characteristics of reverse diode; typical values

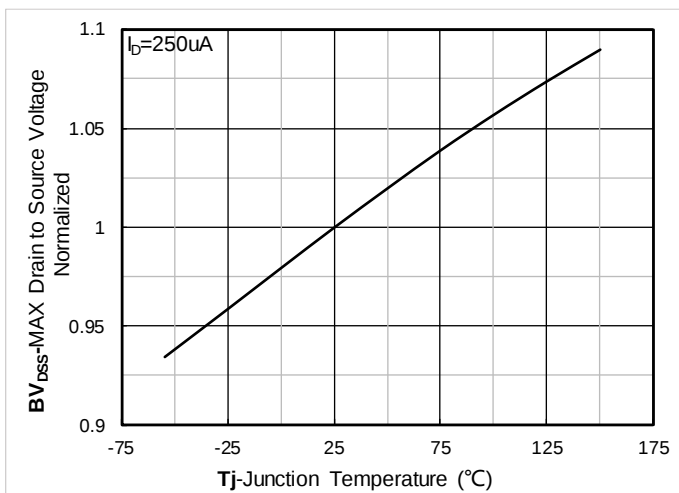


Figure 9. Normalized breakdown voltage

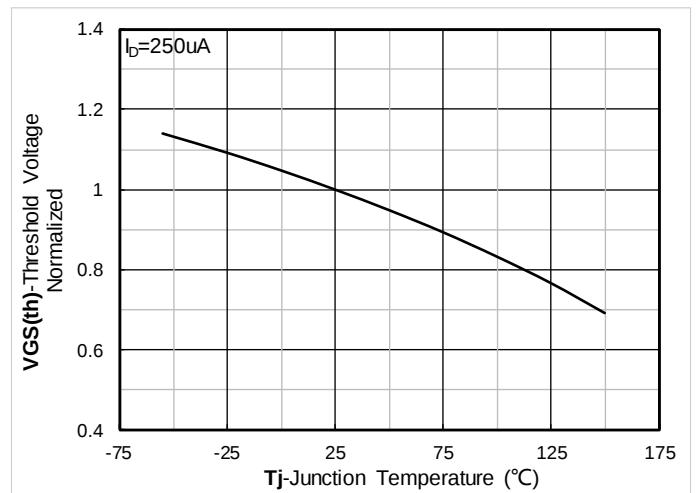


Figure 10. Normalized Threshold voltage

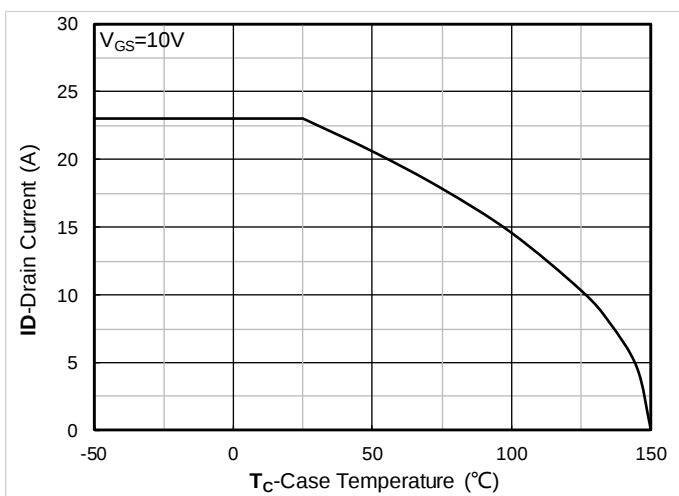


Figure 11. Current dissipation

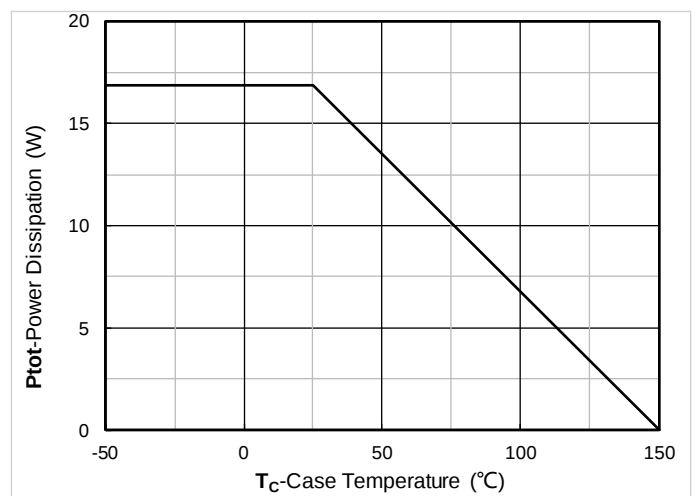


Figure 12. Power dissipation

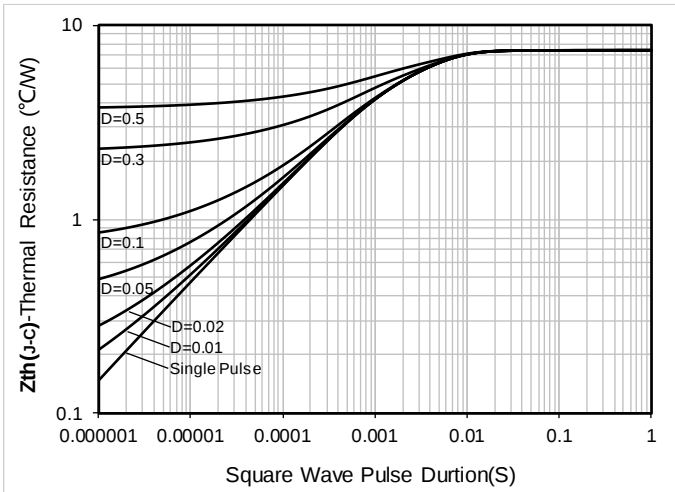


Figure 13. Maximum Transient Thermal Impedance

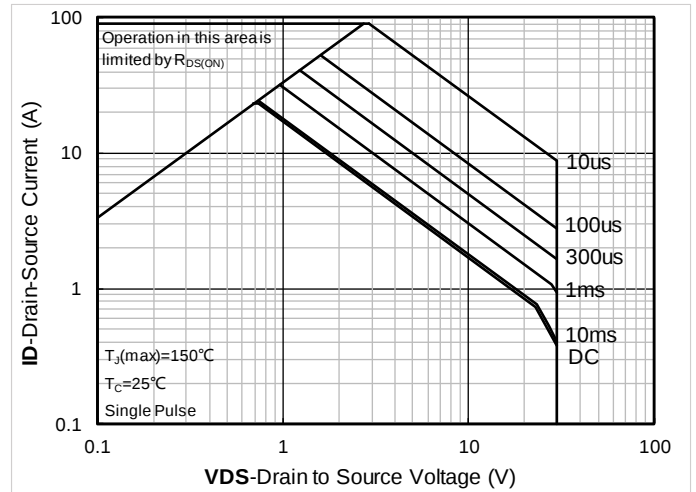


Figure 14. Safe Operation Area

■ PMOS Typical Electrical and Thermal Characteristics Diagrams

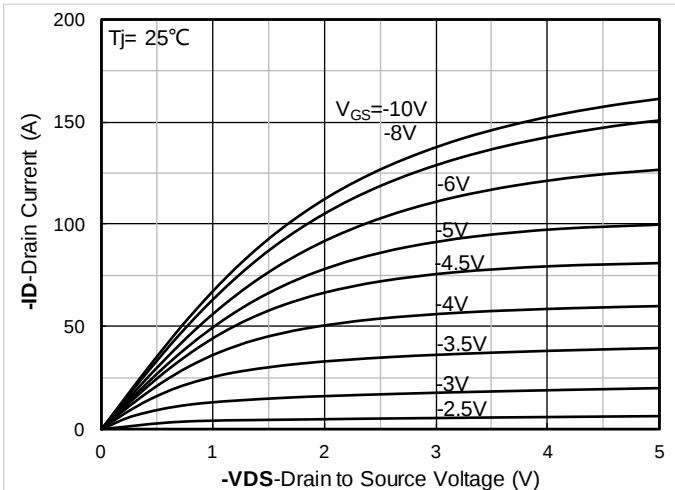


Figure 1. Output Characteristics; typical values

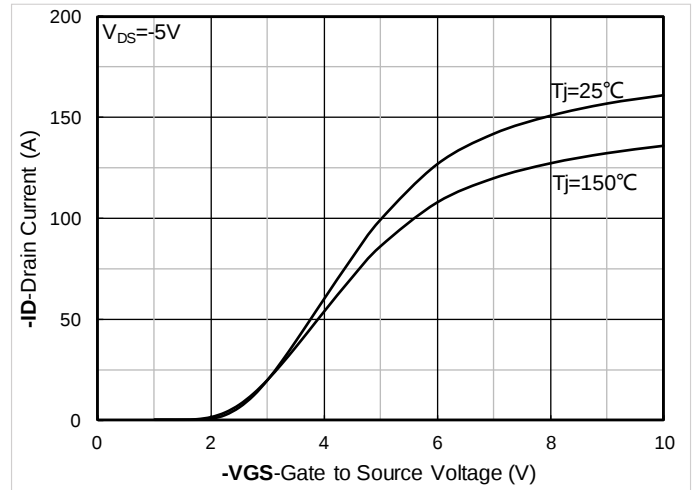


Figure 2. Transfer Characteristics; typical values

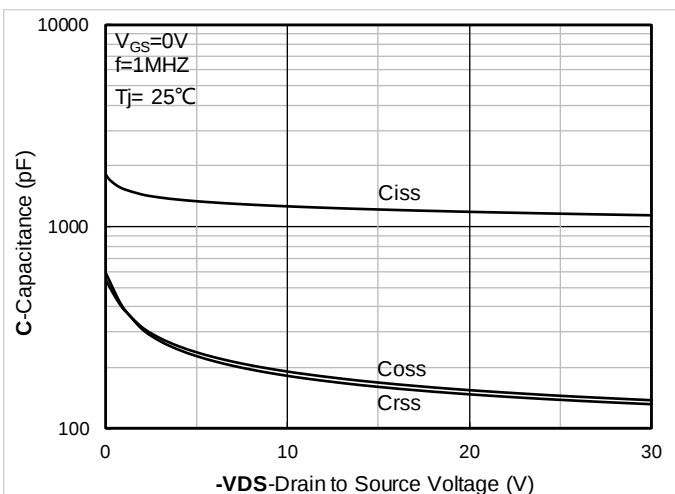


Figure 3. Capacitance Characteristics; typical values

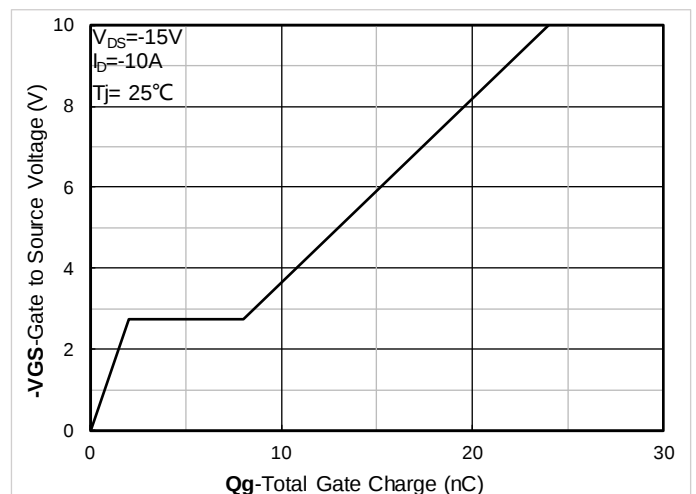


Figure 4. Gate Charge; typical values

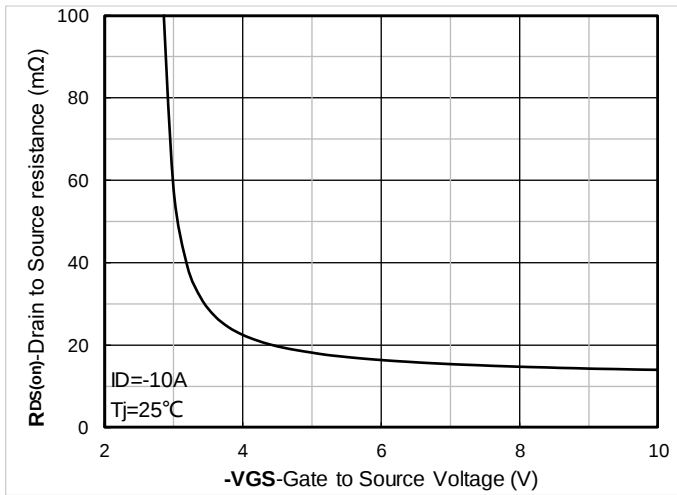


Figure 5. On-Resistance vs. Gate to Source Voltage; typical values

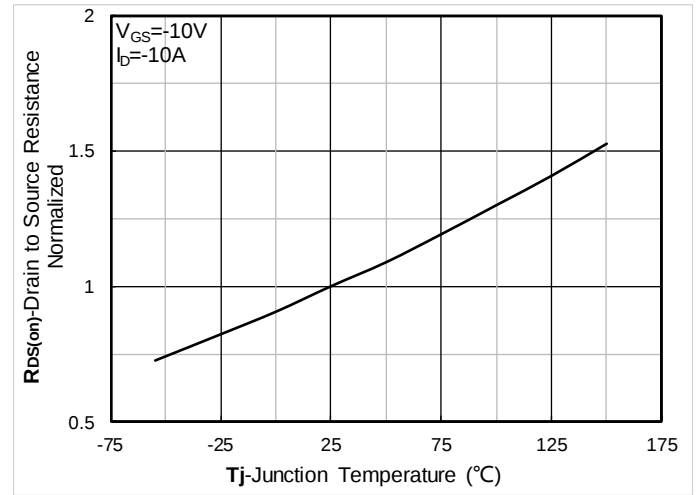


Figure 6. Normalized On-Resistance

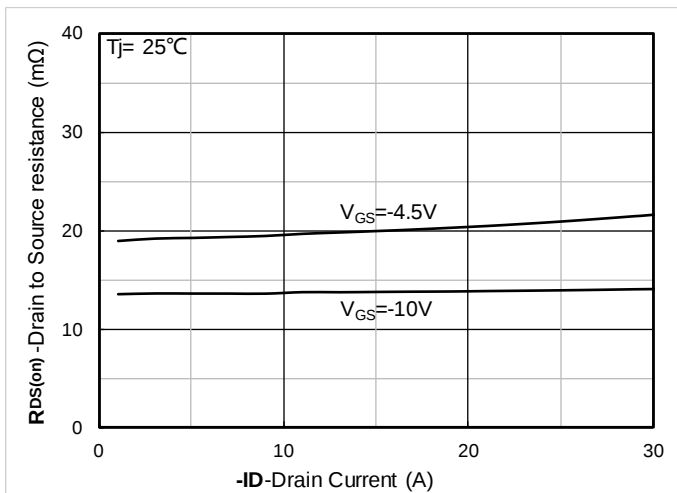


Figure 7. $R_{DS(on)}$ vs. Drain Current; typical values

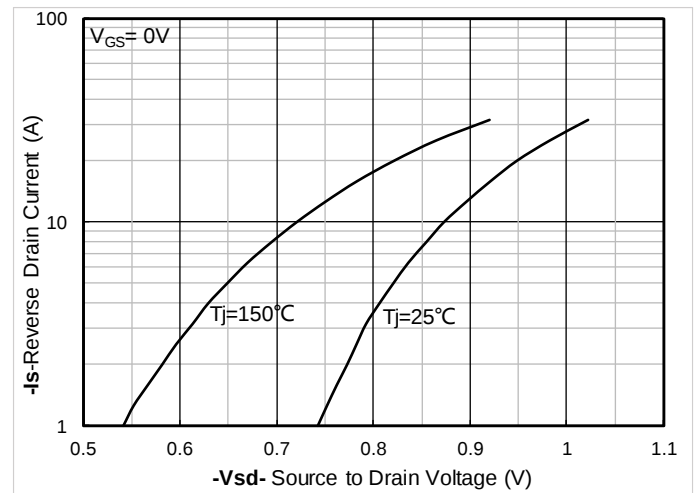


Figure 8. Forward characteristics of reverse diode; typical values

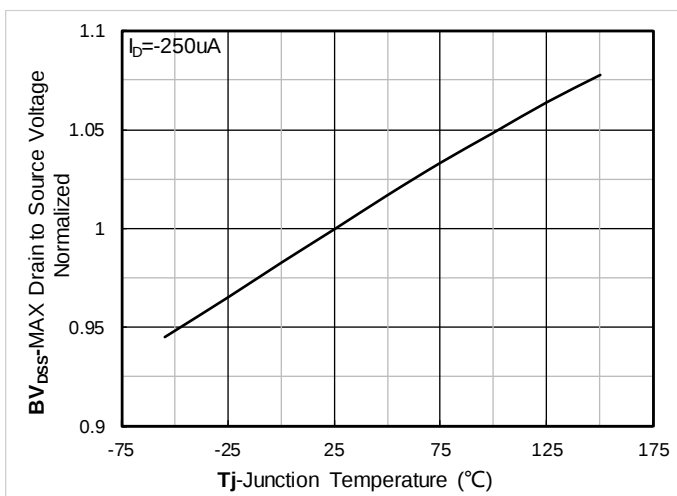


Figure 9. Normalized breakdown voltage

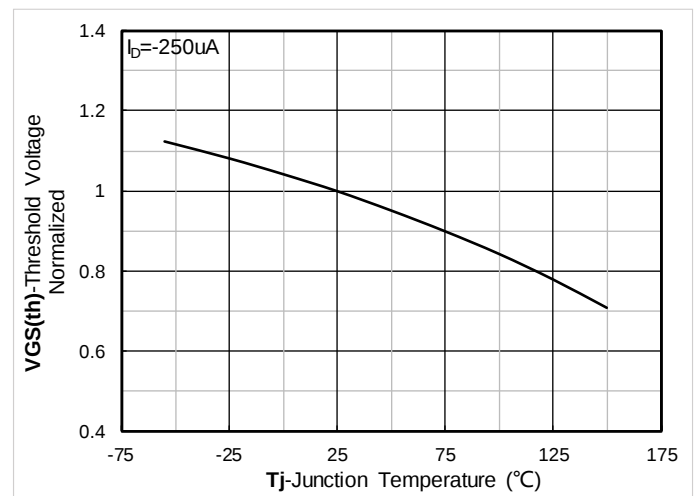


Figure 10. Normalized Threshold voltage

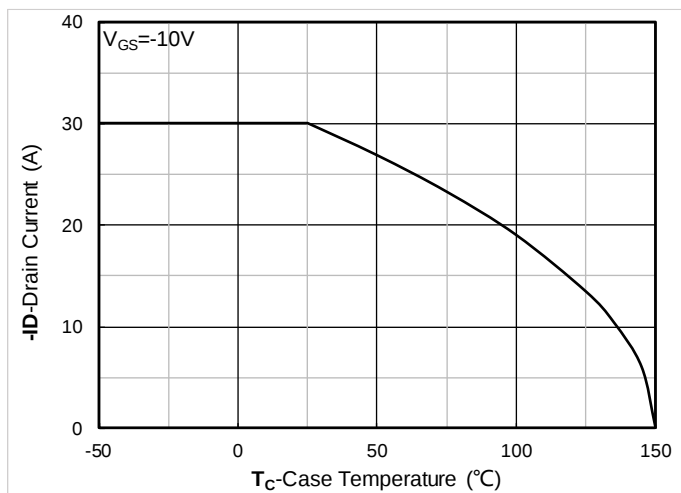


Figure 11. Current dissipation

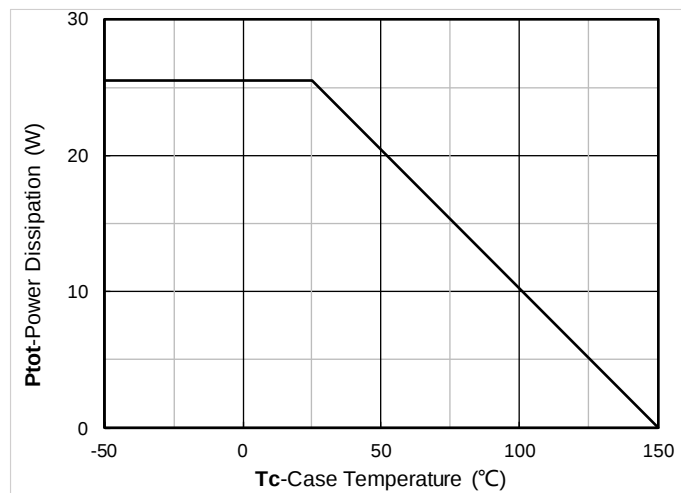


Figure 12. Power dissipation

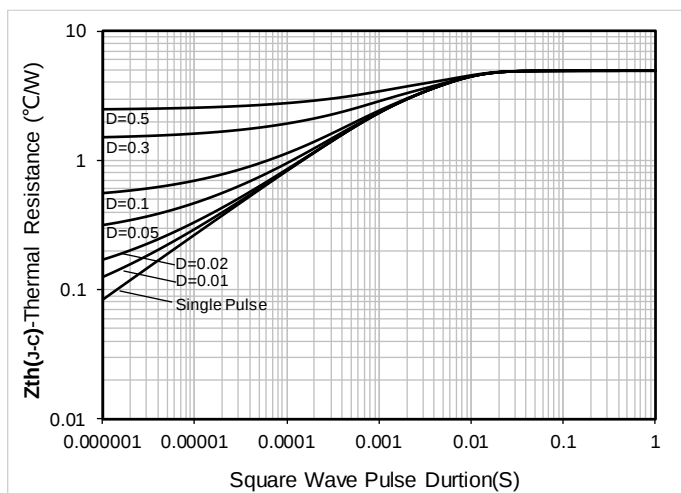


Figure 13. Maximum Transient Thermal Impedance


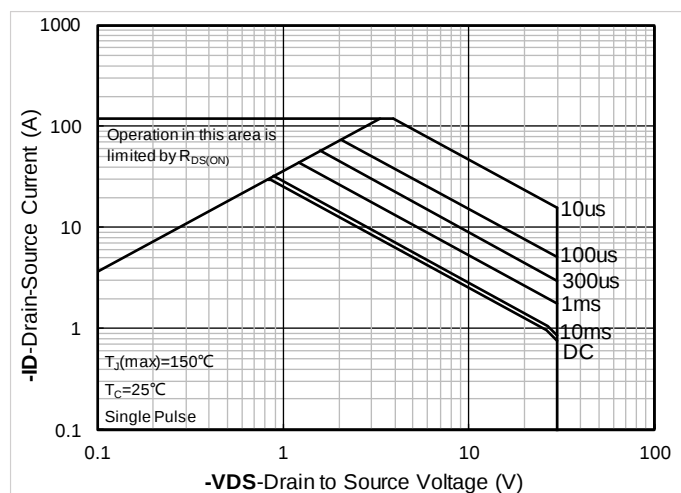


Figure 14. Safe Operation Area




YJG018NP03A


■ PDFN5060-8L-E-1.1MM Package information

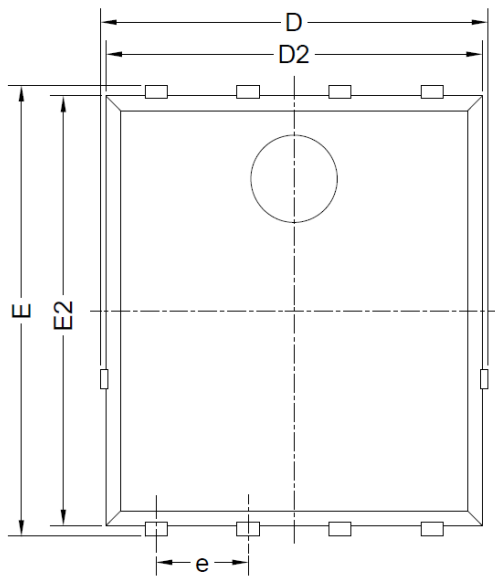


Top View
正面视图

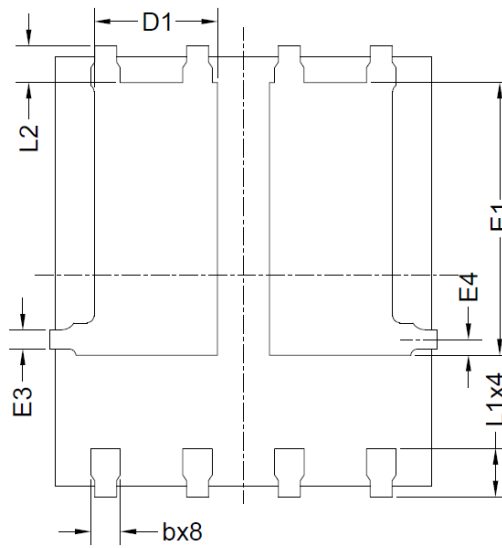

Bottom View
背面视图

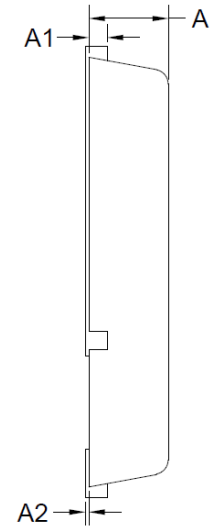

Side View
侧面视图

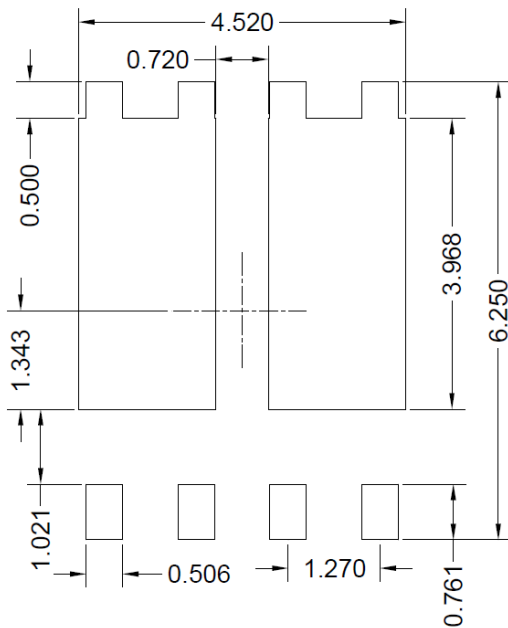

Suggested Solder Pad Layout
Top View

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
D	5.15	5.35	5.55
E	5.95	6.15	6.35
A	1.00	1.10	1.20
A1	0.254 BSC		
A2			0.10
D1	1.50	1.70	1.90
E1	3.52	3.72	3.92
D2	5.00	5.20	5.40
E2	5.66	5.86	6.06
E3	0.254REF		
E4	0.21REF		
L1	0.56	0.66	0.76
L2	0.50 BSC		
b	0.31	0.41	0.51
e	1.27 BSC		



Note:

1. Controlling dimension: in millimeters.
2. General tolerance: ± 0.10 mm.
3. The pad layout is for reference purposes only.



YJG018NP03A

■ PDFN5060-8L-I-1.1MM Package information

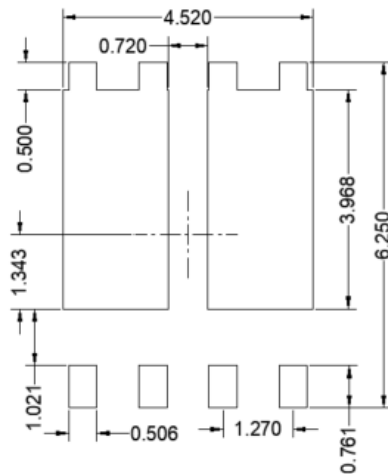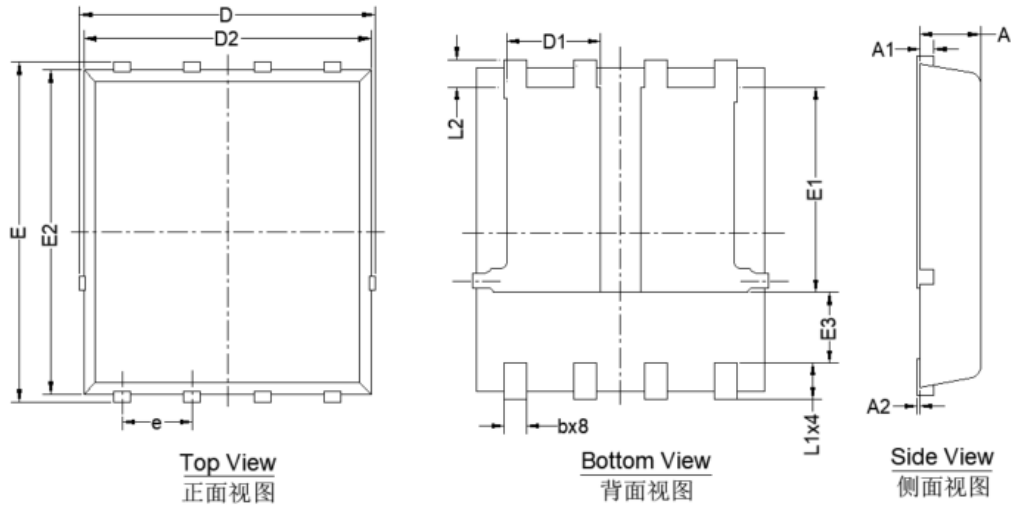

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
D	4.80	5.10	5.40
E	5.95	6.10	6.25
A	1.00	1.10	1.20
A1	0.203 BSC		
A2			0.10
D1	1.50	1.70	1.90
E1	3.30	3.40	3.50
D2	4.80	4.90	5.00
E2	5.65	5.75	5.85
E3	1.40		
L1	0.38	0.55	0.71
L2	0.45 BSC		
b	0.31	0.41	0.51
e	1.27 BSC		


Note:

1. Controlling dimension: in millimeters.
2. General tolerance: ± 0.10 mm.
3. The pad layout is for reference purposes only.



YJG018NP03A

■ Marking Information

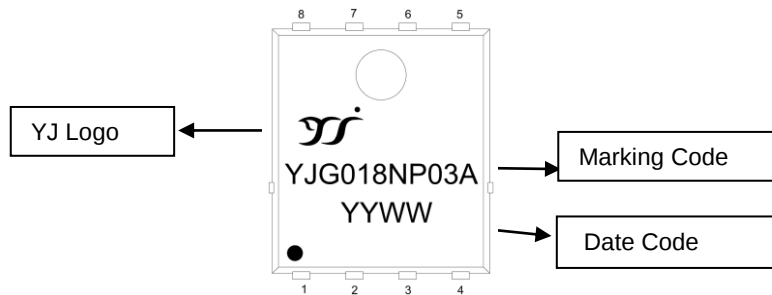

Note:

1. All marking is at middle of the product body
2. All marking is in laser printing
3. YJG018NP03A is Marking Code, YYWW is date code, "YY" is year, "WW" is week
4. Body color: Black



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <http://www.21yangjie.com> , or consult your nearest Yangjie's sales office for further assistance.