



ZK340- FAST RECOVERY DIODE


1000-1800V_{RRM}

FAST RECOVERY RECTIFIER DIODE

Features:

- . All diffused structure
- . High surge rating
- . Blocking capability up to 1800 volts
- . Ceramic housing hermetic package
- . Pressure assembled device

D1A

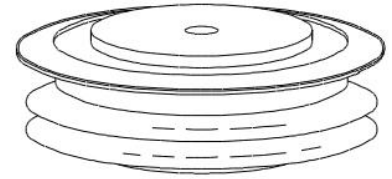

ELECTRICAL CHARACTERISTICS AND RATINGS

Reverse Blocking

Device Type	V _{RRM} (1)	V _{RSM} (1)
ZK340-10	1000	1100
ZK340-12	1200	1300
ZK340-14	1400	1500
ZK340-16	1600	1700
ZK340-18	1800	1900

V_{RRM} = Repetitive peak reverse voltage


V_{RSM} = Non repetitive peak reverse voltage (2)

Repetitive peak reverse leakage current	I _{RRM}	10 mA 15 mA (3)
---	------------------	--------------------

Notes:

All ratings are specified for T_j=25 °C, unless otherwise stated

- (1) All voltage ratings are specified for an applied 50Hz/60Hz sinusoidal waveform over the temperature range -40°C to +125 °C.
- (2) 10 msec. max. pulse width
- (3) Maximum value for T_j = 125 °C.
- (4) See parameter definition below :

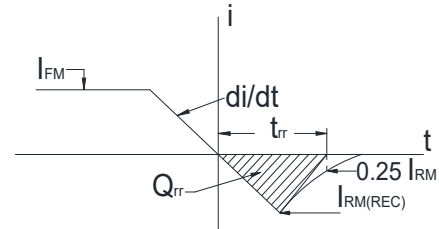

reverse recovery characteristic





Conducting - on state



Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Average forward current	I _{F(AV)}		340		A	Sinewave 180°, T _c =70°C
RMS forward current	I _{FRMS}		534		A	
Peak one cycle surge (non repetitive) current	I _{FSM}		5100		A	10 msec (50Hz), sinusoidal wave-shape, 180° conduction, T _j =125°C
I square t	I ² t		13×10 ⁴		A ² s	8.3 msec and 10.0 msec
Peak forward voltage	V _{FM}		2.30		V	I _{FM} = 900A; Duty cycle ≤ 0.01%
Threshold voltage	V _{FO}		1.48		V	T _j =125°C, I=0.5 π I _{F(AV)} to 1.5 π I _{F(AV)}
Slope resistance	r _F		0.65		mΩ	T _j =125°C, I=0.5 π I _{F(AV)} to 1.5 π I _{F(AV)}
Reverse Recovery Current (4)	I _{RM(REC)}		*		A	I _{FM} = 1000 A; dI _F /dt = 10 A/μs; T _j max
Reverse Recovery Charge (4)	Q _{rr}		*		μC	I _{FM} = 1000 A; dI _F /dt = 10 A/μs; T _j max
Reverse Recovery Time (4)	t _{rr}		4		μs	I _{FM} = 1000 A; dI _F /dt = 10 A/μs; T _j max

Parameter	Symbol	Min.	Max.	Typ.	Units	Conditions
Operating temperature	T_j	-40	+125		°C	
Storage temperature	T_{stg}	-40	+140		°C	
Thermal resistance - junction to case	$R_{\theta(j-c)}$		0.08		°C/W	Double sided cooled (1) @ 2000 lb.; (2) @800 lb.
Thermal resistance - junction to case	$R_{\theta(j-c)}$		0.16		°C/W	Single sided cooled (1) @ 2000 lb.; (2) @800 lb.
Thermal resistance - case to heatsink	$R_{\theta(c-s)}$		0.02 0.04		°C/W	Double sided cooled * Single sided cooled *
Mounting force	F			4	kN	
Weight	m			0.06	kg.	


* Mounting surfaces smooth, flat and greaseless

Graph

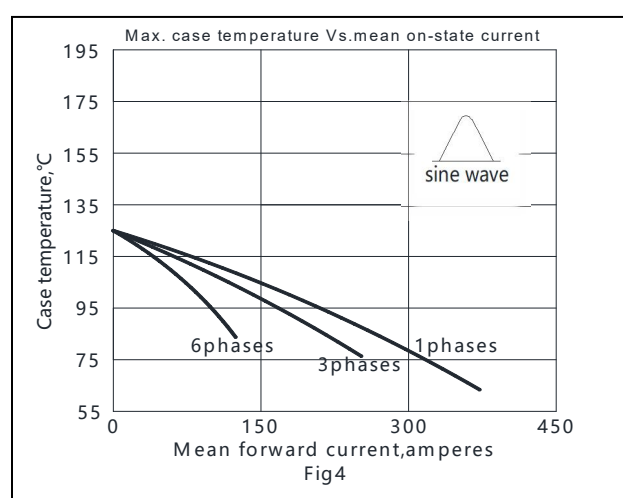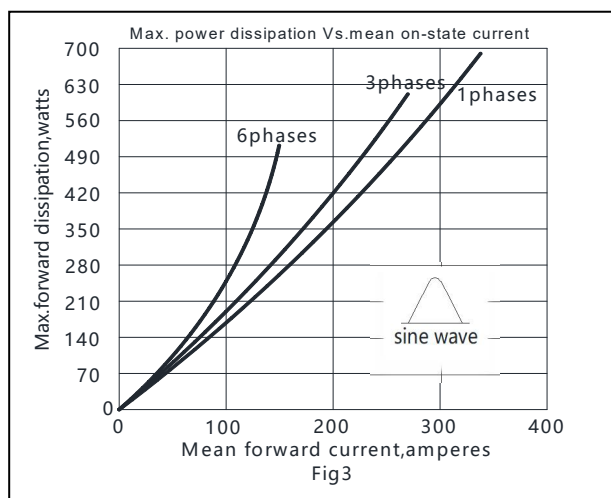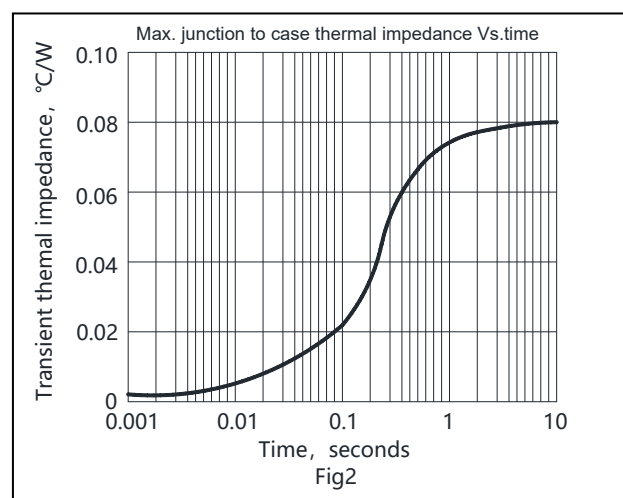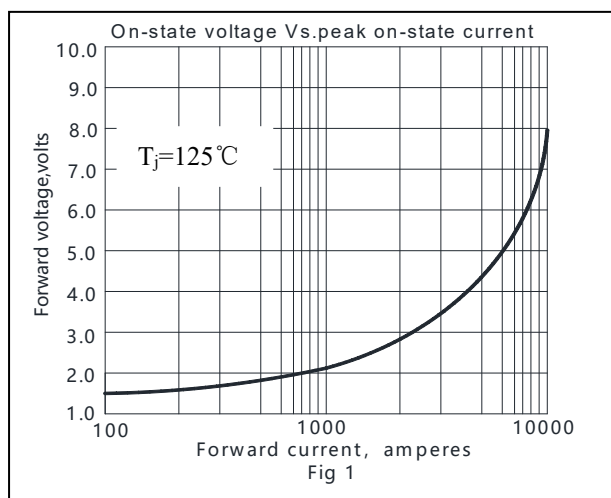

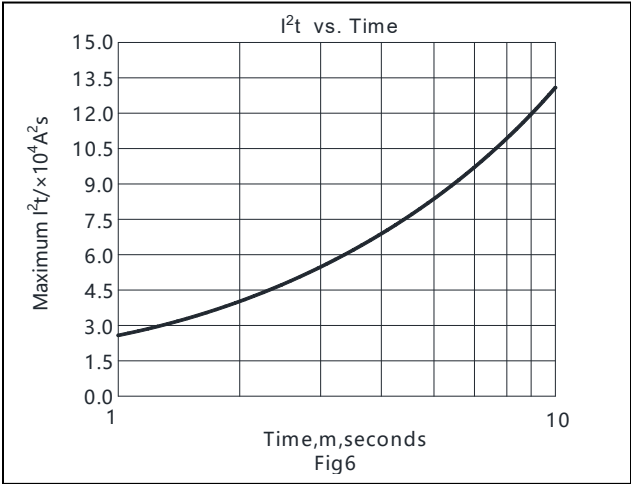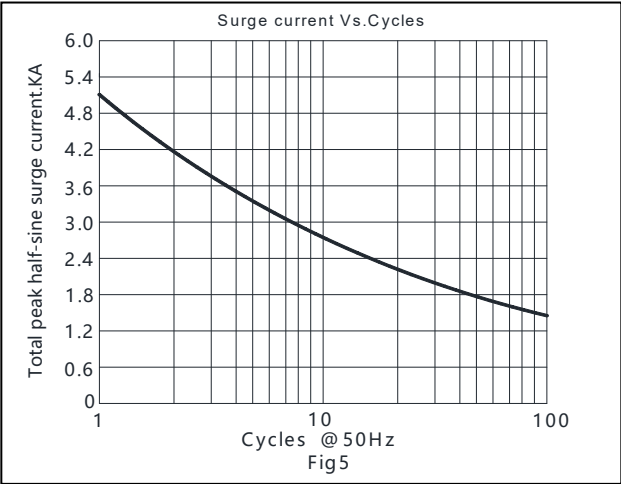

CASE OUTLINE AND DIMENSIONS

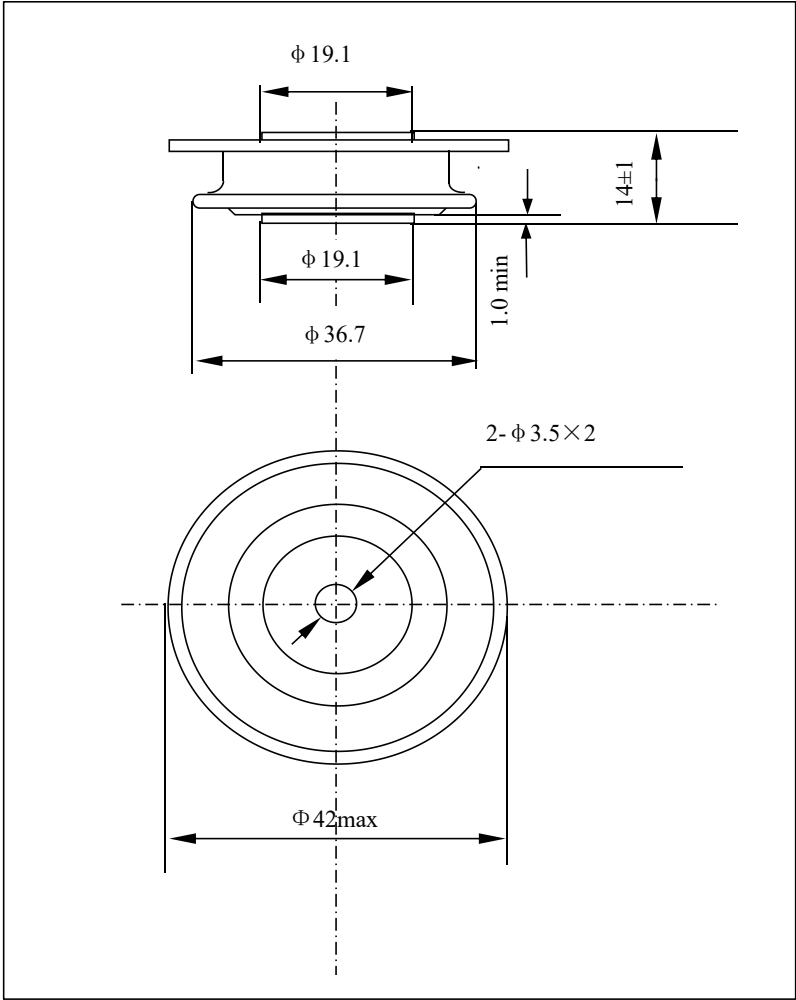

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function, or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <http://www.21yangjie.com> , or consult your nearest Yangjie's sales office for further assistance.