



# ZP580- RECTIFIER DIODE


2600-3600V<sub>RRM</sub>

## GENERAL PURPOSE HIGH POWER STANDARD RECTIFIER

### Features:

- . All diffused structure
- . High surge rating
- . Blocking capability up to 3600 volts
- . Ceramic housing hermetic package
- . Pressure assembled device

D2A

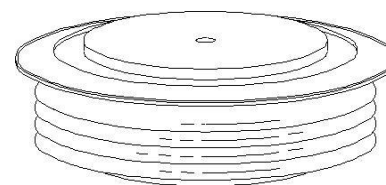

## ELECTRICAL CHARACTERISTICS AND RATINGS

### Reverse Blocking

| Device Type | V <sub>RRM</sub> (1) | V <sub>RSM</sub> (1) |
|-------------|----------------------|----------------------|
| ZP580-26    | 2600                 | 2700                 |
| ZP580-28    | 2800                 | 2900                 |
| ZP580-30    | 3000                 | 3100                 |
| ZP580-32    | 3200                 | 3300                 |
| ZP580-34    | 3400                 | 3500                 |
| ZP580-36    | 3600                 | 3700                 |

V<sub>RRM</sub> = Repetitive peak reverse voltage


V<sub>RSM</sub> = Non repetitive peak reverse voltage (2)

|                                         |                  |                   |
|-----------------------------------------|------------------|-------------------|
| Repetitive peak reverse leakage current | I <sub>RRM</sub> | 2 mA<br>30 mA (3) |
|-----------------------------------------|------------------|-------------------|

Notes:

All ratings are specified for T<sub>j</sub>=25 °C, unless otherwise stated

- (1) All voltage ratings are specified for an applied 50Hz/60Hz sinusoidal waveform over the temperature range 0 to +150 °C.
- (2) 10 msec. max. pulse width
- (3) Maximum value for T<sub>j</sub> = 150 °C.
- (4) See parameter definition below :

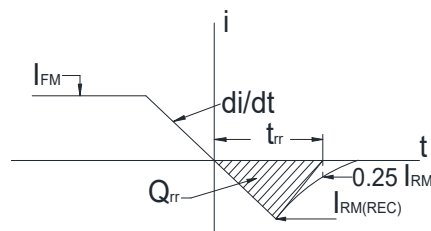

reverse recovery characteristic

### Conducting - on state





| Parameter                                     | Symbol               | Min. | Max.                   | Typ. | Units            | Conditions                                                                      |
|-----------------------------------------------|----------------------|------|------------------------|------|------------------|---------------------------------------------------------------------------------|
| Average forward current                       | I <sub>F(AV)</sub>   |      | 580                    |      | A                | Sinewave 180°, T <sub>c</sub> =100°C                                            |
| RMS forward current                           | I <sub>FRMS</sub>    |      | 911                    |      | A                | Nominal value                                                                   |
| Peak one cycle surge (non repetitive) current | I <sub>FSM</sub>     |      | 8120                   |      | A                | 10 msec (50Hz), sinusoidal wave-shape, 180° conduction, T <sub>j</sub> =150°C   |
| I square t                                    | I <sup>2</sup> t     |      | 32.9 × 10 <sup>4</sup> |      | A <sup>2</sup> s | 10 msec                                                                         |
| Peak forward voltage                          | V <sub>FM</sub>      |      | 1.95                   |      | V                | I <sub>FM</sub> = 1500A; T <sub>j</sub> =25°C                                   |
| Threshold voltage                             | V <sub>FO</sub>      |      | 0.88                   |      | V                | T <sub>j</sub> =150°C, I = 0.5 π I <sub>F(AV)</sub> to 1.5 π I <sub>F(AV)</sub> |
| Slope resistance                              | r <sub>F</sub>       |      | 0.50                   |      | mΩ               | T <sub>j</sub> =150°C, I = 0.5 π I <sub>F(AV)</sub> to 1.5 π I <sub>F(AV)</sub> |
| Reverse Recovery Current (4)                  | I <sub>RM(REC)</sub> |      |                        |      | A                | I <sub>FM</sub> = 500 A; di/dt = -10 A/s; T <sub>jmax</sub>                     |
| Reverse Recovery Charge (4)                   | Q <sub>rr</sub>      |      |                        | 2000 | μC               | I <sub>FM</sub> = 500 A; di/dt = -10 A/s; T <sub>jmax</sub>                     |
| Reverse Recovery Time (4)                     | t <sub>rr</sub>      |      |                        |      | μs               | I <sub>FM</sub> = 500 A; di/dt = -10 A/s; T <sub>jmax</sub>                     |



| Parameter                             | Symbol            | Min. | Max.  | Typ. | Units | Conditions          |
|---------------------------------------|-------------------|------|-------|------|-------|---------------------|
| Operating temperature                 | $T_j$             | -40  | +150  |      | °C    |                     |
| Storage temperature                   | $T_{stg}$         | -40  | +150  |      | °C    |                     |
| Thermal resistance - junction to case | $R_{\theta(j-c)}$ |      | 0.054 |      | °C/W  | Double sided cooled |
| Thermal resistance - case to heatsink | $R_{\theta(c-s)}$ |      | 0.01  |      | °C/W  | Double sided cooled |
| Mounting force                        | F                 | 9    | 11    | 10   | kN    |                     |
| Weight                                | m                 |      |       | 0.08 | kg.   |                     |

\* Mounting surfaces smooth, flat and greaseless


## Graph

## ZP580-RECTIFIER DIODE

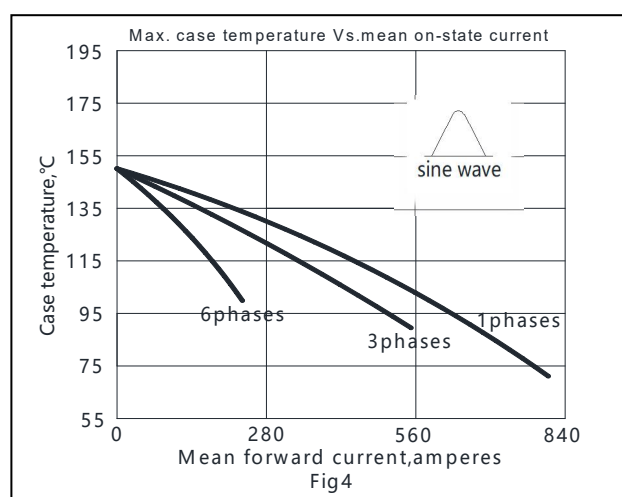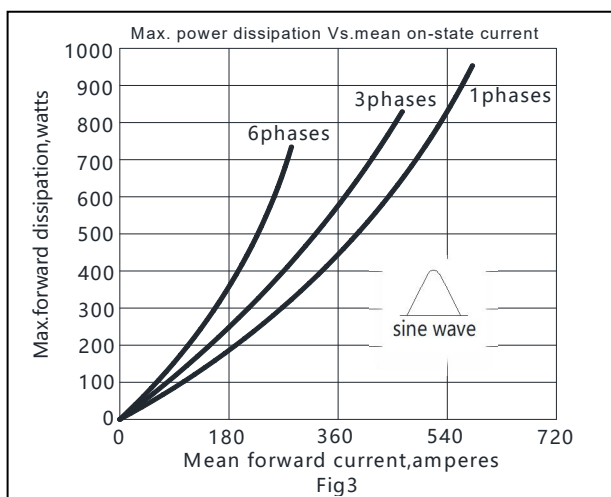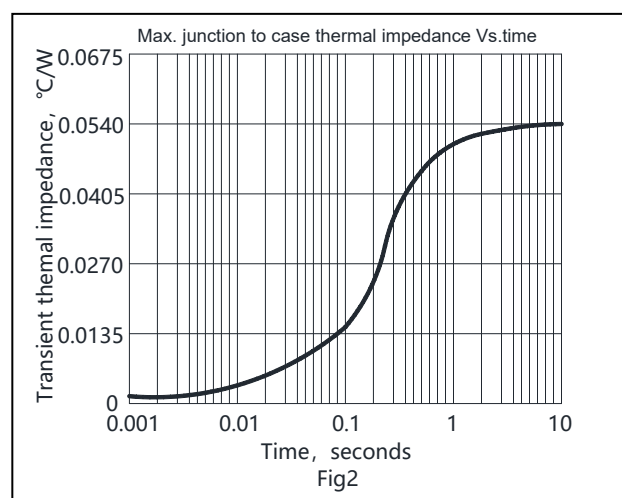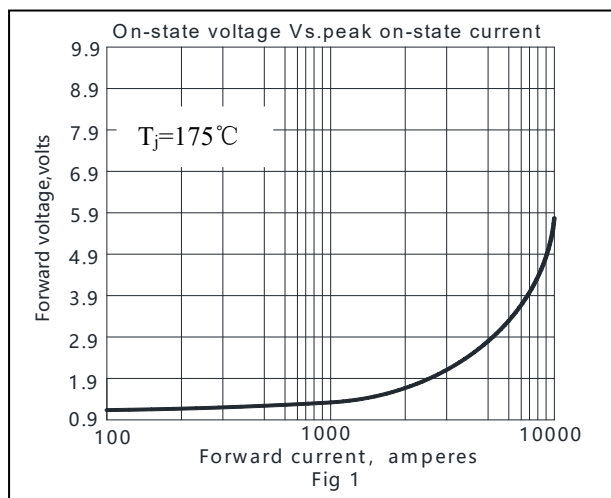

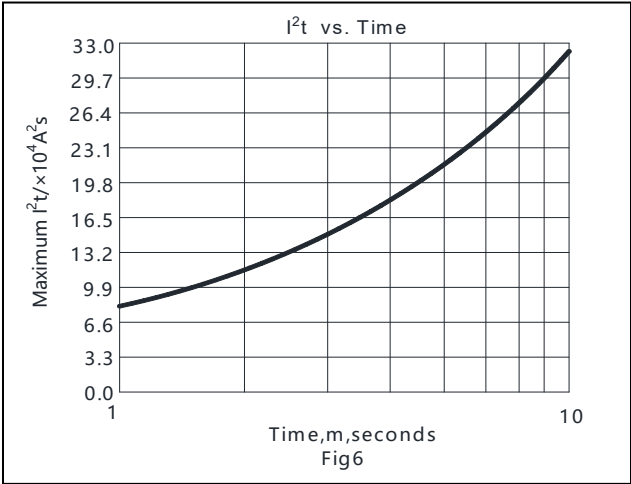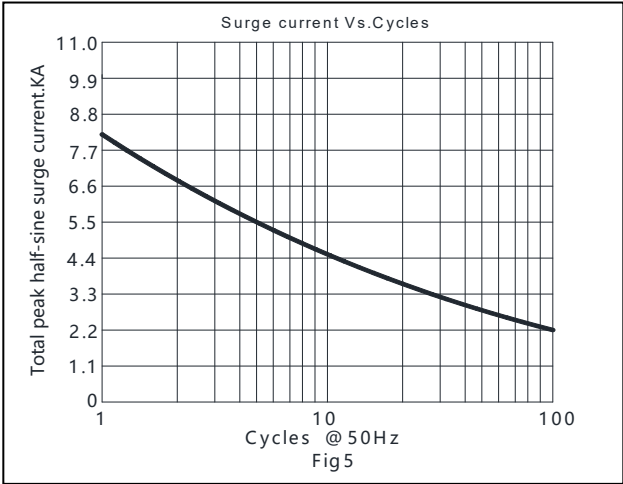

CASE OUTLINE AND DIMENSIONS

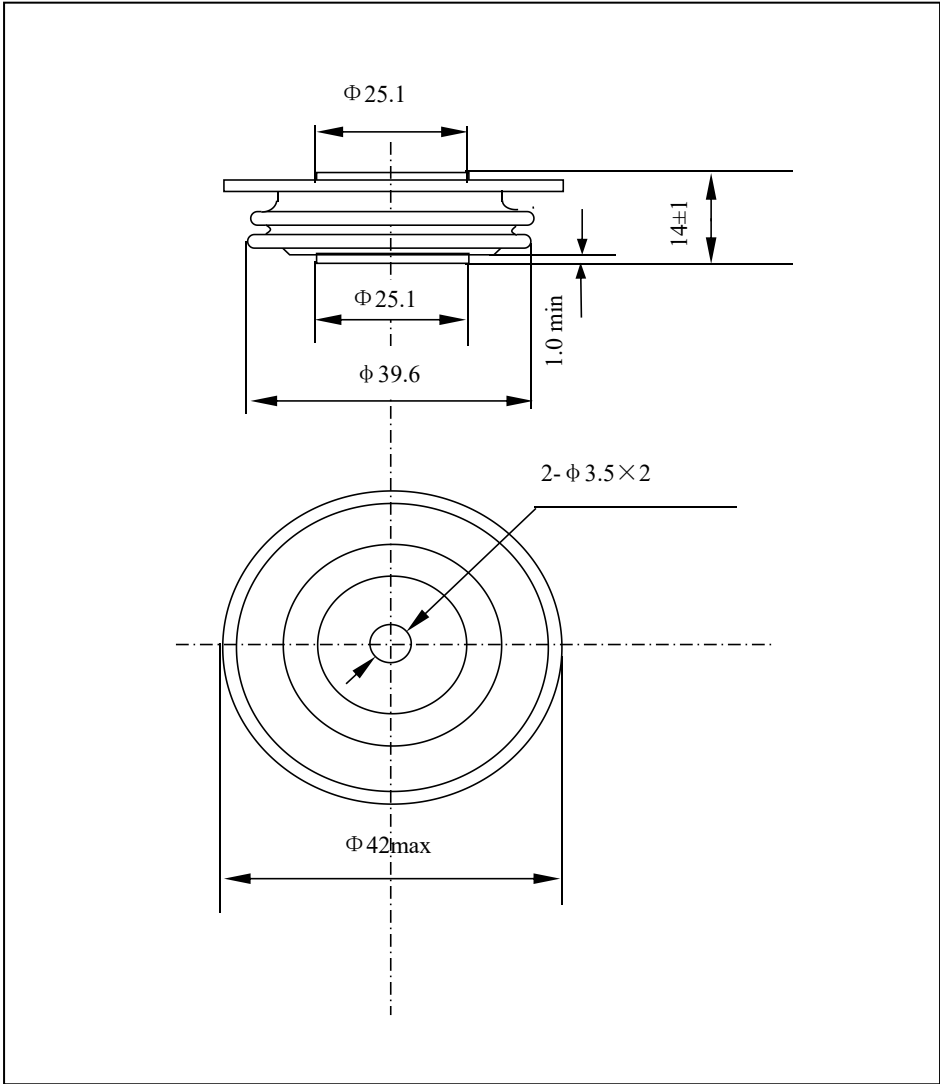

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function, or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <http://www.21yangjie.com> , or consult your nearest Yangjie's sales office for further assistance.