


GT100CL120T1VH

Circuit Diagram

IGBT Module

Features:

- $V_{CES}=1200V$ $I_C=100A$ Trench & Field Stop IGBT Module
- Short Circuit Capability
- Low Switching Loss
- 100% RBSOA Tested($2 \times I_C$)
- Low Stray Inductance
- Lead Free, Compliant with RoHS Requirement

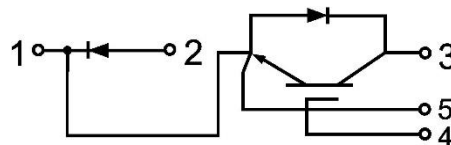

Applications:

- High-power Converters
- UPS System
- Motor Drives

Type	Package	Marking
GT100CL120T1VH	T1V	GT100CL120T1VH

IGBT, Brake-Chopper

Maximum Rated Values of IGBT ($T_C=25^\circ C$ unless otherwise specified)

V_{CES}	Collector-Emitter Blocking Voltage		1200	V
V_{GES}	Gate-Emitter Voltage		± 20	V
I_C	Continuous Collector Current Limited by T_{Jmax}	$T_C=90^\circ C$	100	A
		$T_C=25^\circ C$	200	A
I_{CM}	Peak Collector Current Repetitive	T_p Limited by T_{Jmax}	200	A
P_D	Maximum Power Dissipation (IGBT)	$T_C=25^\circ C, T_{Jmax}=175^\circ C$	700	W

GT100CL120T1VH

IGBT Module Datasheet



Electrical Characteristics of IGBT ($T_C=25^{\circ}\text{C}$ unless otherwise specified)

Static Characteristics

Symbol	Description	Conditions	Min.	Typ.	Max.	Units
$V_{GE(th)}$	Gate-Emitter Threshold Voltage	$I_C=3.8\text{mA}$, $V_{CE}=V_{GE}$	5.0	5.6	6.5	V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=100\text{A}$, $V_{GE}=15\text{V}$	$T_J=25^{\circ}\text{C}$	1.65	2.00	V
			$T_J=125^{\circ}\text{C}$	2.01		V
			$T_J=175^{\circ}\text{C}$	2.17		V
I_{CES}	Collector-Emitter Leakage Current	$V_{GE}=0\text{V}$, $V_{CE}=1200\text{V}$, $T_J=25^{\circ}\text{C}$			1	mA
I_{GES}	Gate-Emitter Leakage Current	$V_{GE}=20\text{V}$, $V_{CE}=0\text{V}$, $T_J=25^{\circ}\text{C}$			200	nA
C_{ies}	Input Capacitance	$V_{CE}=25\text{V}$, $V_{GE}=0\text{V}$, $f=100\text{kHz}$		9.63		nF
C_{oes}	Output Capacitance			0.60		nF
C_{res}	Reverse Transfer Capacitance			0.04		nF

Switching Characteristics

$t_{d(on)}$	Turn-on Delay Time	$V_{CC}=600V, I_C=100A,$ $R_{Gon}=1\Omega, V_{GE}=\pm 15V,$ Inductive Load	$T_J=25^{\circ}C$		116		ns
			$T_J=125^{\circ}C$		133		
			$T_J=175^{\circ}C$		136		
t_r	Rise Time		$T_J=25^{\circ}C$		29		ns
			$T_J=125^{\circ}C$		33		
			$T_J=175^{\circ}C$		37		
$t_{d(off)}$	Turn-off Delay Time		$T_J=25^{\circ}C$		199		ns
			$T_J=125^{\circ}C$		231		
			$T_J=175^{\circ}C$		247		
t_f	Fall Time	$T_J=25^{\circ}C$		149		ns	
		$T_J=125^{\circ}C$		170			
		$T_J=175^{\circ}C$		198			
E_{on}	Turn-on Switching Loss	$V_{CC}=600V, I_C=100A,$ $R_{Gon}=1\Omega, V_{GE}=\pm 15V,$ $di/dt=2100A/\mu s(T_J=175^{\circ}C)$ Inductive Load	$T_J=25^{\circ}C$		6.4		mJ
		$T_J=125^{\circ}C$		8.7			
		$T_J=175^{\circ}C$		10.4			

GT100CL120T1VH

IGBT Module Datasheet



E _{off}	Turn-off Switching Loss	V _{CC} =600V, I _C =100A, R _{Goff} =1Ω, V _{GE} =±15V, du/dt=5900V/μs(T _J =175°C) Inductive Load	T _J =25°C		5.9		mJ
			T _J =125°C		7.4		
			T _J =175°C		8.4		
Q _g	Total Gate Charge	V _{GE} =+15V...-15V	T _J =25°C		654		nC
R _{G (int)}	Internal Gate Resistance		T _J =25°C		6.6		Ω
T _{SC}	V _{CC} =600V, V _{GE} =±15V, T _J =175°C ^{note1}					10	us
R _{θJC}	IGBT Thermal Resistance: Junction-to-Case (per IGBT)					0.214	°C/W
R _{θCS}	IGBT Thermal Resistance: Case-to-Sink (per IGBT) (per IGBT, λ _{grease} = 1 W/(m · K))				0.057		°C/W

note1: Short circuit withstand time cannot exceed 10us under specified condition

Diode, Chopper

Maximum Rated Values of Diode-Chopper (T_C=25°C unless otherwise specified)

V _{RRM}	Repetitive Peak Reverse Voltage	T _J =25°C	1200	V
I _F	Diode Continuous Forward Current		100	A
I _{FM}	Diode Maximum Forward Current	t _p =1ms	200	A

Electrical Characteristics of Diode-Chopper (T_C=25°C unless otherwise specified)

Symbol	Description	Conditions		Min.	Typ.	Max.	Units
V _{FM}	Forward Voltage	I _F =100A	T _J =25°C		1.67	2.05	V
			T _J =125°C		1.76		
			T _J =175°C		1.73		
t _{rr}	Reverse Recovery Time	I _F =100A, -diF/dt=2750A/μs(T _J =175°C), V _R =600V, V _{GE} =-15V	T _J =25°C		349		ns
			T _J =125°C		511		
			T _J =175°C		547		
I _{rr}	Peak Reverse Recovery Current		T _J =25°C		106		A
			T _J =125°C		95		
			T _J =175°C		98		
Q _{rr}	Reverse Recovery Charge		T _J =25°C		10.5		μC
			T _J =125°C		15.4		
			T _J =175°C		19.7		

GT100CL120T1VH

IGBT Module Datasheet



E _{rec}	Reverse Recovery Energy	I _F =100A, -diF/dt=2750A/μs(T _J =175°C), V _R =600V, V _{GE} =-15V	T _J =25°C		3.9		mJ
			T _J =125°C		6.0		
			T _J =175°C		7.7		
R _{θJC}	Diode Thermal Resistance: Junction-to-Case (per Diode)					0.436	°C/W
R _{θCS}	Diode Thermal Resistance: Case-to-Sink (per Diode, λ _{grease} = 1 W/(m • K))				0.116		°C/W

Diode, Reverse

Maximum Rated Values of Diode-Reverse ($T_C=25^\circ C$ unless otherwise specified)

V_{RRM}	Repetitive Peak Reverse Voltage	$T_J=25^\circ C$	1200	V
I_F	Diode Continuous Forward Current		75	A
I_{FM}	Diode Maximum Forward Current	$t_p=1ms$	150	A

Electrical Characteristics of Diode- Reverse ($T_C=25^\circ C$ unless otherwise specified)

Symbol	Description	Conditions		Min.	Typ.	Max.	Units
V _{FM}	Forward Voltage	I _F =75A	T _J =25°C		1.53	1.84	V
			T _J =125°C		1.59		
			T _J =175°C		1.53		
R _{θJC}	Diode Thermal Resistance: Junction-to-Case (per Diode)					0.499	°C/W
R _{θCS}	Diode Thermal Resistance: Case-to-Sink (per Diode, λ _{grease} = 1 W/(m • K))				0.132		°C/W

GT100CL120T1VH

IGBT Module Datasheet



Module

Symbol	Description	Conditions	Min.	Typ.	Max.	Units
V _{iso}	Isolation Voltage (All Terminals Shorted)	RMS f=50Hz, 60s	2500			V
T _J	Maximum Junction Temperature		-40		+175	°C
T _{JOP}	Maximum Operating Junction Temperature Range ^{note2}		-40		+150	°C
T _{stg}	Storage Temperature		-40		+125	°C
CTI	Comparative Tracking Index		200			
T	Power Terminals Screw:M5		3.0		5.0	N·m
T	Mounting Screw:M6		4.0		6.0	N·m
G	Weight			165		g

note2: T_{JOP}> 150°C is only allowed for operation at overload conditions.

Ordering Information Table

Device code	G	T	100	CL	120	T1V	H
	①	②	③	④	⑤	⑥	⑦

- ① - IGBT Module
- ② - Field Stop Trench Gate IGBT
- ③ - Rated Current (100=100A)
- ④ - Circuit Configuration: Chopper, CL(Diode on Low Side)
- ⑤ - Rated Voltage (120=1200V)
- ⑥ - Package Type
- ⑦ - Test Level (Pass the Important Reliability Test-Industrial Grade)



Characteristic diagram

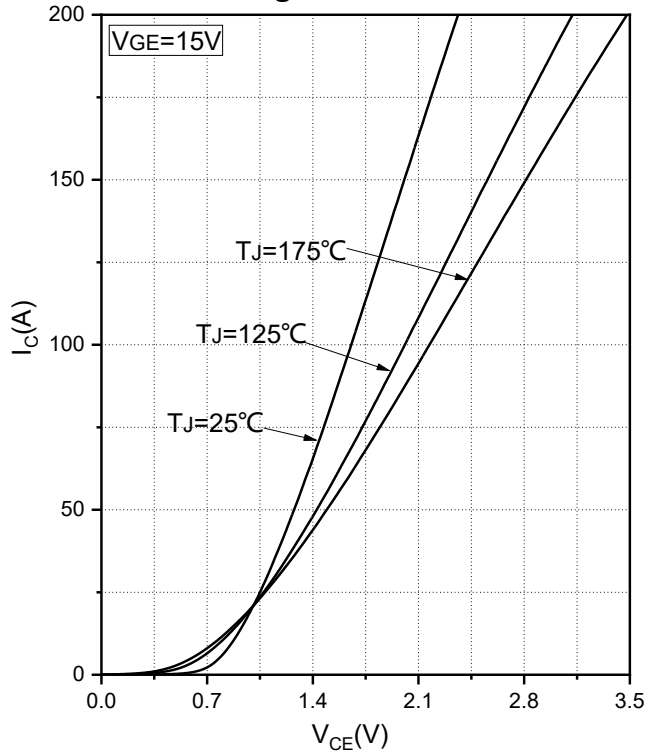


Fig.1 Typical Saturation Voltage Characteristics

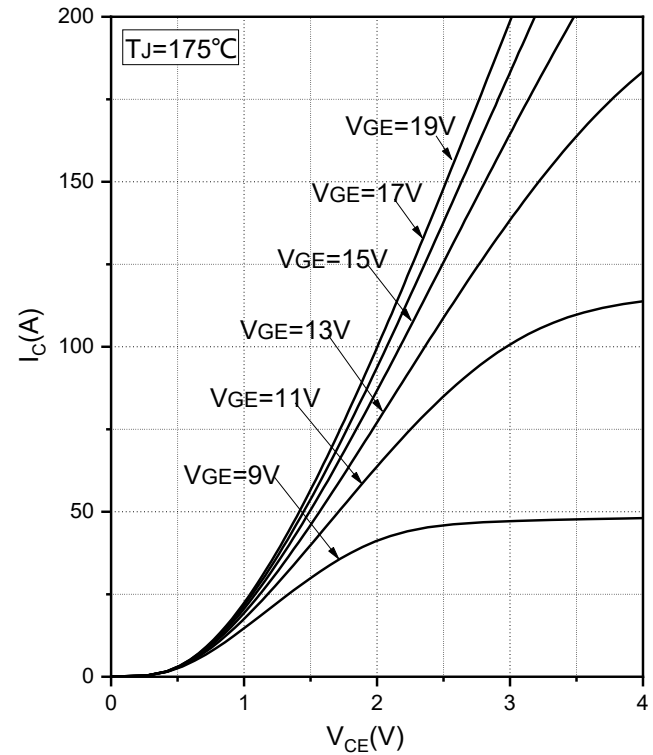


Fig.2 Typical Output Characteristics

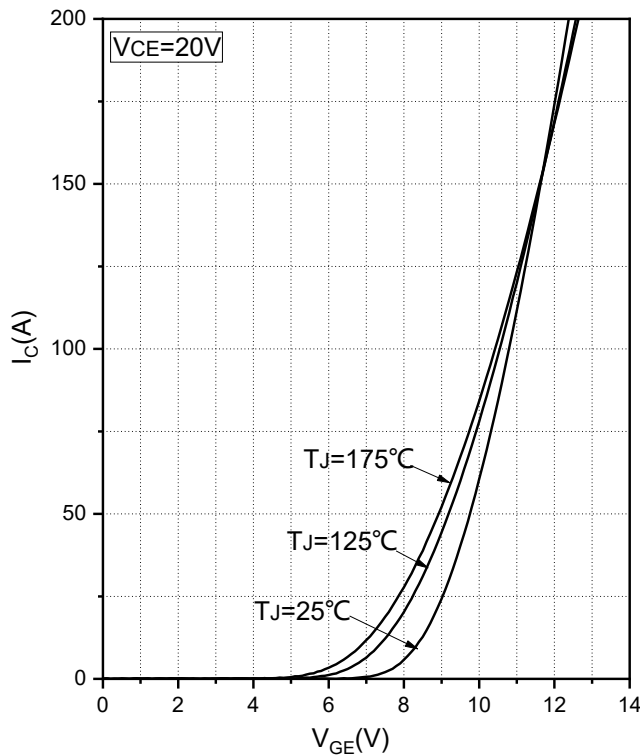


Fig.3 Transfer Characteristic





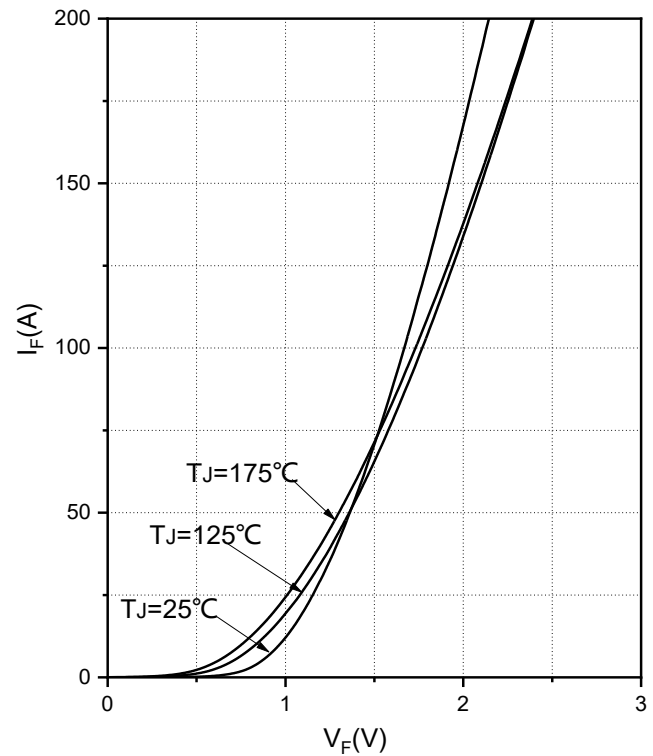


Fig.4 Forward Characteristics of Diode-Chopper

GT100CL120T1VH

IGBT Module Datasheet

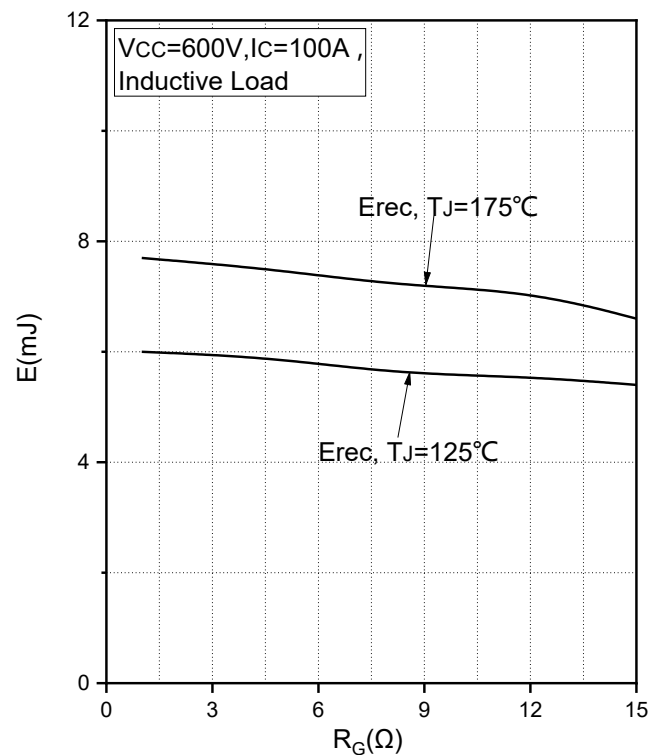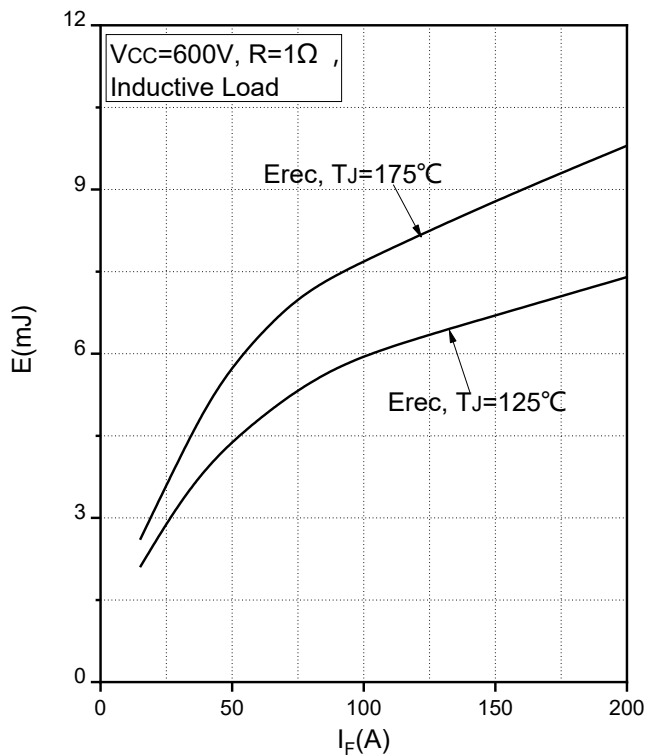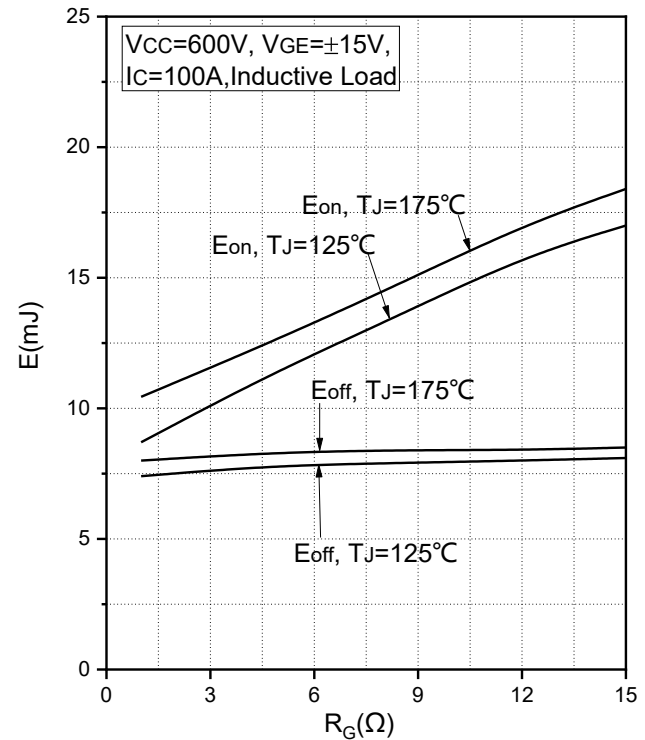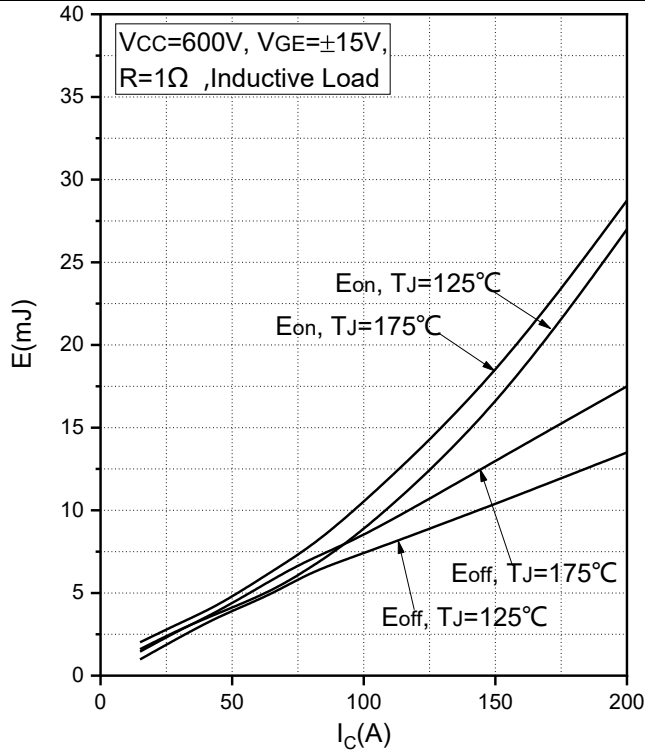

GT100CL120T1VH

IGBT Module Datasheet

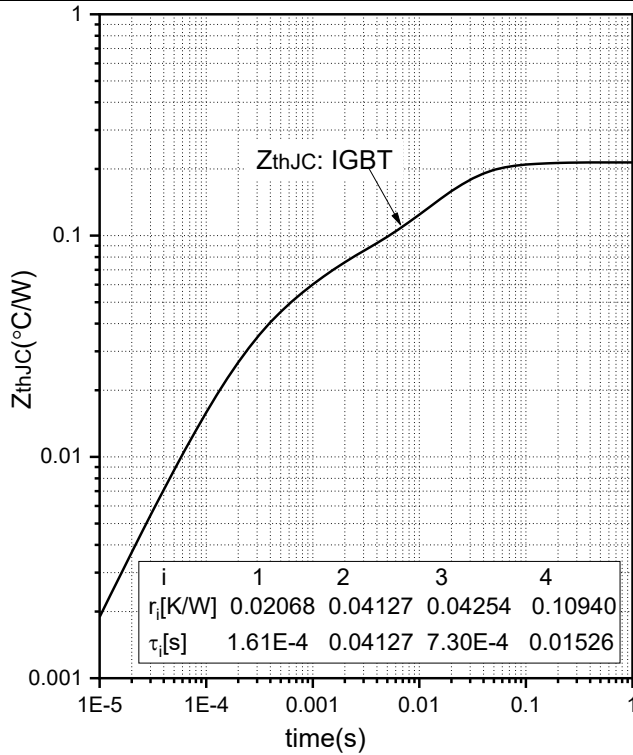


Fig.9 Transient Thermal Impedance (IGBT)

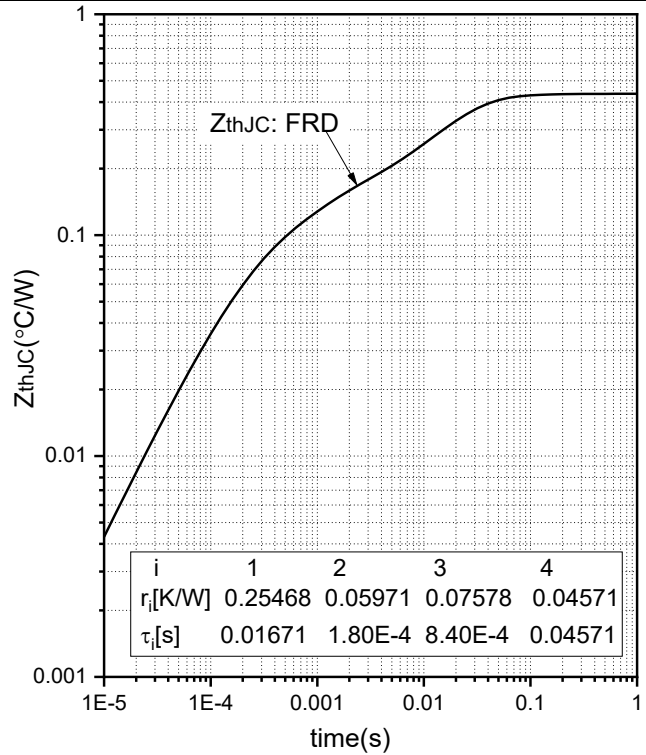


Fig.10 Transient Thermal Impedance (Diode-Chopper)

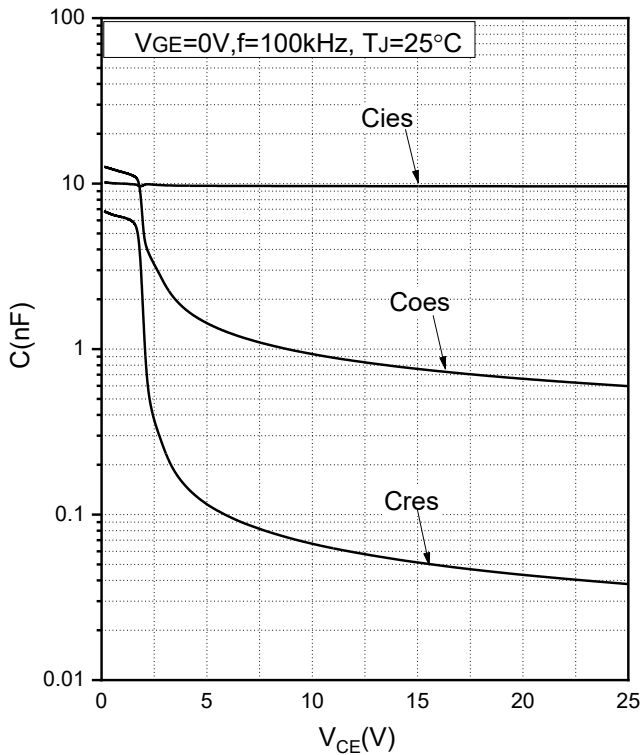


Fig.11 Capacitance Characteristics




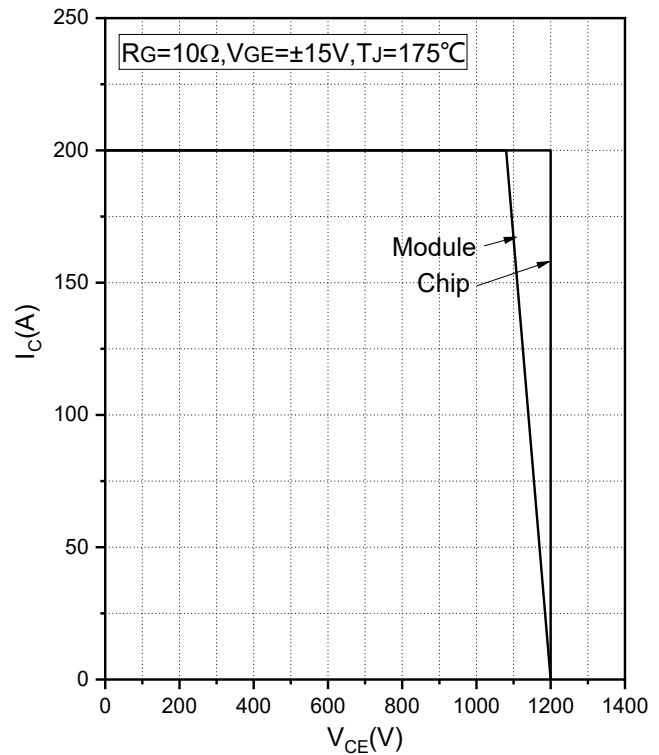



Fig.12 Reverse Bias Safe Operation Area (RBSOA)

GT100CL120T1VH


IGBT Module Datasheet

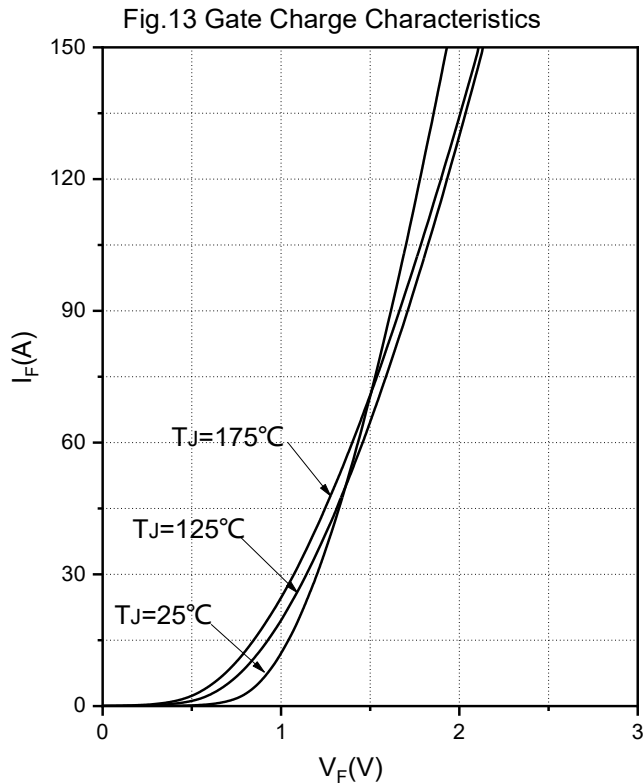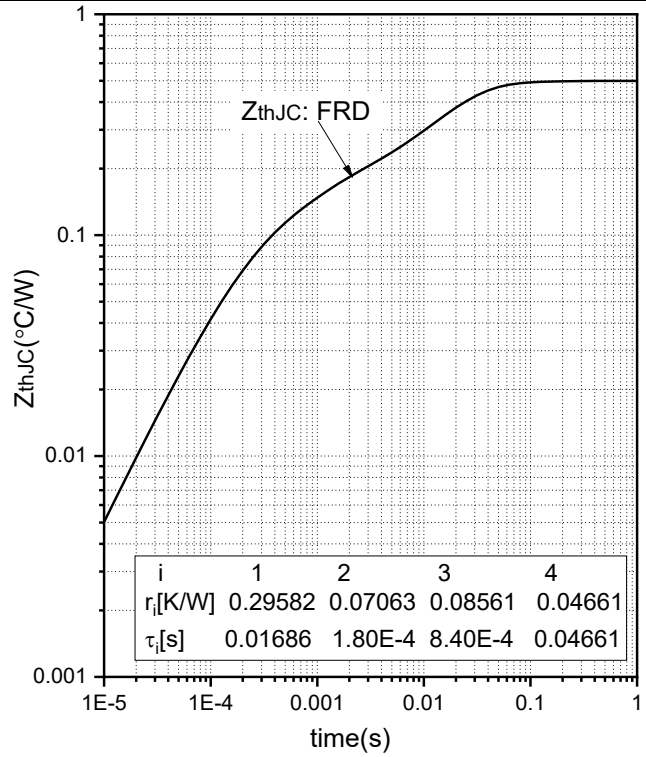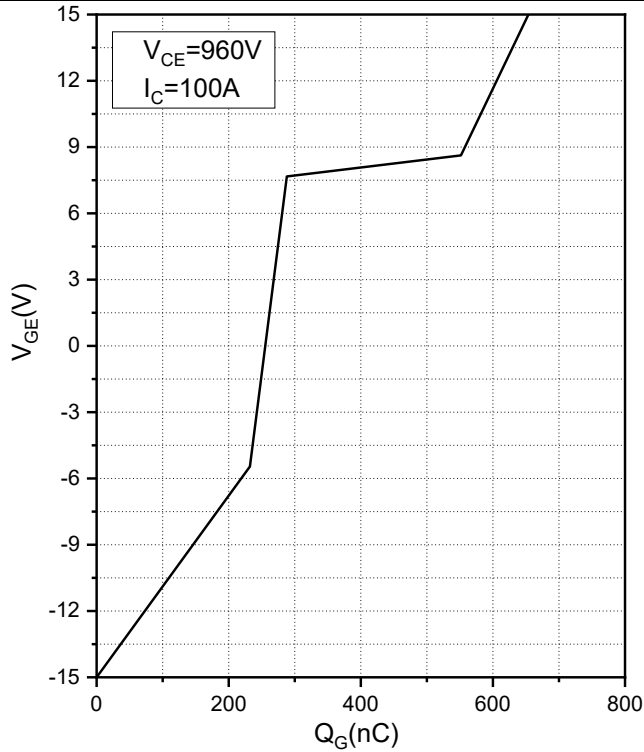


Internal Circuit:

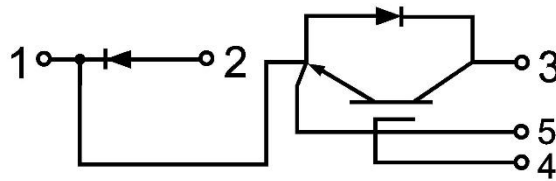

Package Outline (Unit: mm):

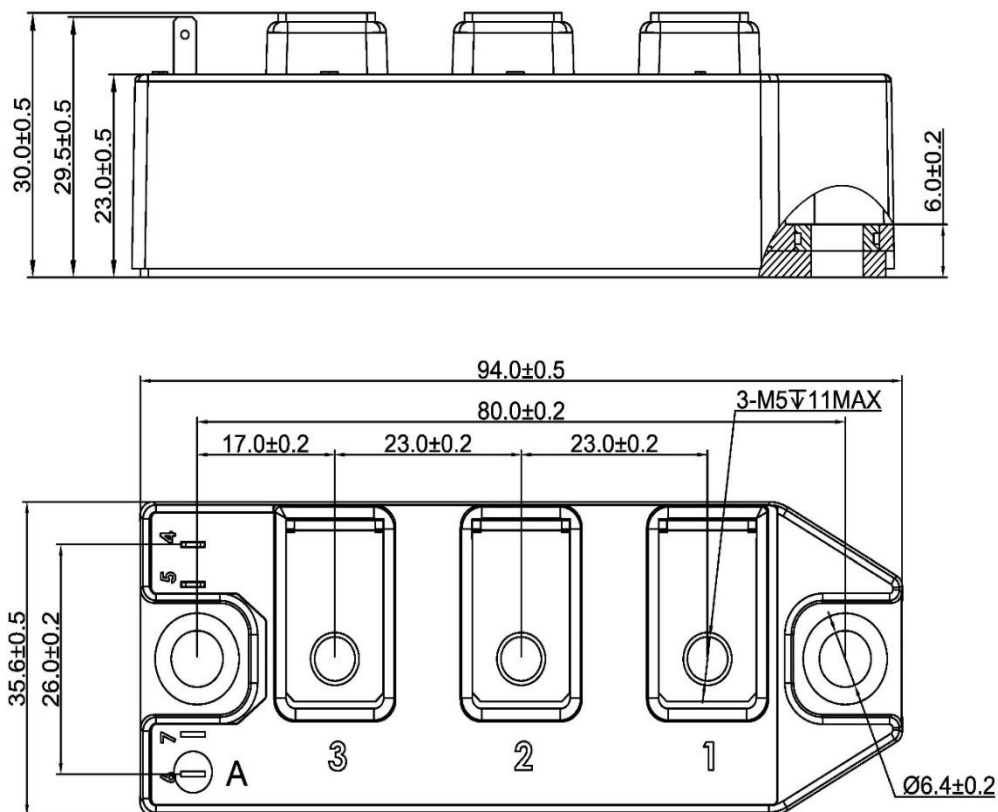

View A
scale 3:1



GT100CL120T1VH

IGBT Module Datasheet



Revision	Notes
A	Final Datasheet Initial Release

Announcement

Information in this document is believed to be accurate and reliable. However, NJSME does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to Make Changes

NJSME reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

The datasheet with “REV.” + “Arabic numerals” is based on engineering data for initial reference purpose only.

The released datasheet would be issued with “REV.” + “alphabet characters”.