


# GT150HF120T1VH

## Circuit Diagram

## IGBT Module

### Features:

- $V_{CES}=1200V$   $I_C=150A$  Trench & Field Stop IGBT Module
- Short Circuit Capability
- Low Switching Loss
- 100% RBSOA Tested( $2 \times I_C$ )
- Low Stray Inductance
- Lead Free, Compliant with RoHS Requirement

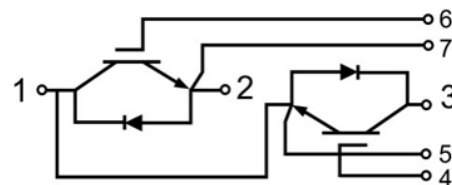

### Applications:

- Welding Machine
- Cutting Machine
- Plating Power Supply
- Induction Heating
- UPS

| Type           | Package | Marking        |
|----------------|---------|----------------|
| GT150HF120T1VH | T1V     | GT150HF120T1VH |

## IGBT, Inverter

### Maximum Rated Values ( $T_C=25^\circ C$ unless otherwise specified)

|           |                                                    |                                        |          |   |
|-----------|----------------------------------------------------|----------------------------------------|----------|---|
| $V_{CES}$ | Collector-Emitter Blocking Voltage                 |                                        | 1200     | V |
| $V_{GES}$ | Gate-Emitter Voltage                               |                                        | $\pm 20$ | V |
| $I_C$     | Continuous Collector Current Limited by $T_{Jmax}$ | $T_C=90^\circ C$                       | 150      | A |
|           |                                                    | $T_C=25^\circ C$                       | 300      | A |
| $I_{CM}$  | Peak Collector Current Repetitive                  | $T_p$ limited by $T_{Jmax}$            | 300      | A |
| $P_D$     | Maximum Power Dissipation (IGBT)                   | $T_C=25^\circ C, T_{Jmax}=175^\circ C$ | 680      | W |

# GT150HF120T1VH

## IGBT Module Datasheet



### Electrical Characteristics of IGBT ( $T_C=25^{\circ}\text{C}$ unless otherwise specified)

#### Static Characteristics

| Symbol        | Description                          | Conditions                                                               | Min.                      | Typ.  | Max. | Units |
|---------------|--------------------------------------|--------------------------------------------------------------------------|---------------------------|-------|------|-------|
| $V_{GE(th)}$  | Gate-Emitter Threshold Voltage       | $I_C=5.7\text{mA}$ , $V_{CE}=V_{GE}$                                     | 5.0                       | 5.9   | 6.6  | V     |
| $V_{CE(sat)}$ | Collector-Emitter Saturation Voltage | $I_C=150\text{A}$ ,<br>$V_{GE}=15\text{V}$                               | $T_J=25^{\circ}\text{C}$  | 1.58  | 1.95 | V     |
|               |                                      |                                                                          | $T_J=125^{\circ}\text{C}$ | 1.93  |      | V     |
|               |                                      |                                                                          | $T_J=175^{\circ}\text{C}$ | 2.10  |      | V     |
| $I_{CES}$     | Collector-Emitter Leakage Current    | $V_{GE}=0\text{V}$ ,<br>$V_{CE}=1200\text{V}$ , $T_J=25^{\circ}\text{C}$ |                           |       | 1    | mA    |
| $I_{GES}$     | Gate-Emitter Leakage Current         | $V_{GE}=20\text{V}$ ,<br>$V_{CE}=0\text{V}$ , $T_J=25^{\circ}\text{C}$   |                           |       | 200  | nA    |
| $C_{ies}$     | Input Capacitance                    | $V_{CE}=25\text{V}$ , $V_{GE}=0\text{V}$ ,<br>$f=100\text{kHz}$          |                           | 17.60 |      | nF    |
| $C_{oes}$     | Output Capacitance                   |                                                                          |                           | 0.86  |      | nF    |
| $C_{res}$     | Reverse Transfer Capacitance         |                                                                          |                           | 0.20  |      | nF    |

#### Switching Characteristics

|                     |                        |                                                                                                                                                           |                       |      |      |    |    |
|---------------------|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|------|------|----|----|
| t <sub>d(on)</sub>  | Turn-on Delay Time     | V <sub>CC</sub> =600V, I <sub>C</sub> =150A,<br>R <sub>Gon</sub> =3.3Ω, V <sub>GE</sub> =±15V,<br>Inductive Load                                          | T <sub>J</sub> =25°C  |      | 177  |    | ns |
|                     |                        |                                                                                                                                                           | T <sub>J</sub> =125°C |      | 186  |    |    |
|                     |                        |                                                                                                                                                           | T <sub>J</sub> =175°C |      | 197  |    |    |
| t <sub>r</sub>      | Rise Time              |                                                                                                                                                           | T <sub>J</sub> =25°C  |      | 50   |    | ns |
|                     |                        |                                                                                                                                                           | T <sub>J</sub> =125°C |      | 58   |    |    |
|                     |                        |                                                                                                                                                           | T <sub>J</sub> =175°C |      | 63   |    |    |
| t <sub>d(off)</sub> | Turn-off Delay Time    |                                                                                                                                                           | T <sub>J</sub> =25°C  |      | 240  |    | ns |
|                     |                        |                                                                                                                                                           | T <sub>J</sub> =125°C |      | 282  |    |    |
|                     |                        |                                                                                                                                                           | T <sub>J</sub> =175°C |      | 295  |    |    |
| t <sub>f</sub>      | Fall Time              | T <sub>J</sub> =25°C                                                                                                                                      |                       | 180  |      | ns |    |
|                     |                        | T <sub>J</sub> =125°C                                                                                                                                     |                       | 262  |      |    |    |
|                     |                        | T <sub>J</sub> =175°C                                                                                                                                     |                       | 273  |      |    |    |
| E <sub>on</sub>     | Turn-on Switching Loss | V <sub>CC</sub> =600V, I <sub>C</sub> =150A,<br>R <sub>Gon</sub> =3.3Ω, V <sub>GE</sub> =±15V,<br>di/dt=1900A/μs(T <sub>J</sub> =175°C)<br>Inductive Load | T <sub>J</sub> =25°C  |      | 13.6 |    | mJ |
|                     |                        | T <sub>J</sub> =125°C                                                                                                                                     |                       | 18.3 |      |    |    |
|                     |                        | T <sub>J</sub> =175°C                                                                                                                                     |                       | 21.2 |      |    |    |



# GT150HF120T1VH

## IGBT Module Datasheet

|                      |                                                                                                   |                                                                                                                                                            |                       |  |       |       |      |
|----------------------|---------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|--|-------|-------|------|
| E <sub>off</sub>     | Turn-off Switching Loss                                                                           | V <sub>CC</sub> =600V, I <sub>C</sub> =150A,<br>R <sub>Goff</sub> =3.3Ω, V <sub>GE</sub> =±15V,<br>du/dt=5200V/μs(T <sub>J</sub> =175°C)<br>Inductive Load | T <sub>J</sub> =25°C  |  | 10.8  |       | mJ   |
|                      |                                                                                                   |                                                                                                                                                            | T <sub>J</sub> =125°C |  | 14.5  |       |      |
|                      |                                                                                                   |                                                                                                                                                            | T <sub>J</sub> =175°C |  | 15.8  |       |      |
| Q <sub>g</sub>       | Total Gate Charge                                                                                 | V <sub>GE</sub> =+15V...-15V                                                                                                                               | T <sub>J</sub> =25°C  |  | 1.02  |       | μC   |
| R <sub>G (int)</sub> | Internal Gate Resistance                                                                          |                                                                                                                                                            | T <sub>J</sub> =25°C  |  | 3.8   |       | Ω    |
| T <sub>SC</sub>      | V <sub>CC</sub> =600V, V <sub>GE</sub> =±15V, T <sub>J</sub> =175°C note1                         |                                                                                                                                                            |                       |  |       | 10    | μs   |
| R <sub>θJC</sub>     | IGBT Thermal Resistance: Junction-to-Case (per IGBT)                                              |                                                                                                                                                            |                       |  |       | 0.219 | °C/W |
| R <sub>θCS</sub>     | IGBT Thermal Resistance: Case-to-Sink (per IGBT)<br>(per IGBT, λ <sub>grease</sub> = 1 W/(m · K)) |                                                                                                                                                            |                       |  | 0.088 |       | °C/W |

note1: Short circuit withstand time cannot exceed 10μs under specified condition

### Diode, Inverter

#### Maximum Rated Values of Diode (T<sub>C</sub>=25°C unless otherwise specified)

|                  |                                  |                      |      |   |
|------------------|----------------------------------|----------------------|------|---|
| V <sub>RRM</sub> | Repetitive Peak Reverse Voltage  | T <sub>J</sub> =25°C | 1200 | V |
| I <sub>F</sub>   | Diode Continuous Forward Current |                      | 150  | A |
| I <sub>FM</sub>  | Diode Maximum Forward Current    | tp=1ms               | 300  | A |

#### Electrical Characteristics of Diode (T<sub>C</sub>=25°C unless otherwise specified)

| Symbol          | Description                   | Conditions                                                                                                          |                       | Min. | Typ. | Max. | Units |
|-----------------|-------------------------------|---------------------------------------------------------------------------------------------------------------------|-----------------------|------|------|------|-------|
| V <sub>FM</sub> | Forward Voltage               | I <sub>F</sub> =150A                                                                                                | T <sub>J</sub> =25°C  |      | 1.71 | 2.10 | V     |
|                 |                               |                                                                                                                     | T <sub>J</sub> =125°C |      | 1.84 |      |       |
|                 |                               |                                                                                                                     | T <sub>J</sub> =175°C |      | 1.81 |      |       |
| t <sub>rr</sub> | Reverse Recovery Time         | I <sub>F</sub> =150A,<br>-diF/dt=2200A/μs(T <sub>J</sub> =175°C),<br>V <sub>R</sub> =600V,<br>V <sub>GE</sub> =-15V | T <sub>J</sub> =25°C  |      | 328  |      | ns    |
|                 |                               |                                                                                                                     | T <sub>J</sub> =125°C |      | 432  |      |       |
|                 |                               |                                                                                                                     | T <sub>J</sub> =175°C |      | 570  |      |       |
| I <sub>rr</sub> | Peak Reverse Recovery Current |                                                                                                                     | T <sub>J</sub> =25°C  |      | 102  |      | A     |
|                 |                               |                                                                                                                     | T <sub>J</sub> =125°C |      | 106  |      |       |
|                 |                               |                                                                                                                     | T <sub>J</sub> =175°C |      | 108  |      |       |
| Q <sub>rr</sub> | Reverse Recovery Charge       |                                                                                                                     | T <sub>J</sub> =25°C  |      | 13.7 |      | μC    |
|                 |                               |                                                                                                                     | T <sub>J</sub> =125°C |      | 19.3 |      |       |
|                 |                               |                                                                                                                     | T <sub>J</sub> =175°C |      | 25.5 |      |       |

# GT150HF120T1VH

## IGBT Module Datasheet



|                  |                                                                                       |                                                                                                                     |                       |  |     |       |      |
|------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|-----------------------|--|-----|-------|------|
| E <sub>rec</sub> | Reverse Recovery Energy                                                               | I <sub>F</sub> =150A,<br>-diF/dt=2200A/μs(T <sub>J</sub> =175°C),<br>V <sub>R</sub> =600V,<br>V <sub>GE</sub> =-15V | T <sub>J</sub> =25°C  |  | 4.8 |       | mJ   |
|                  |                                                                                       |                                                                                                                     | T <sub>J</sub> =125°C |  | 7.2 |       |      |
|                  |                                                                                       |                                                                                                                     | T <sub>J</sub> =175°C |  | 9.9 |       |      |
| R <sub>θJC</sub> | Diode Thermal Resistance: Junction-to-Case (per Diode)                                |                                                                                                                     |                       |  |     | 0.456 | °C/W |
| R <sub>θCS</sub> | Diode Thermal Resistance: Case-to-Sink (per Diode, λ <sub>grease</sub> = 1 W/(m • K)) |                                                                                                                     |                       |  |     | 0.182 | °C/W |

### Module

| Symbol    | Description                                                   |                  | Min. | Typ. | Max. | Units      |
|-----------|---------------------------------------------------------------|------------------|------|------|------|------------|
| $V_{iso}$ | Isolation Voltage (All Terminals Shorted)                     | RMS, f=50Hz, 60s | 2500 |      |      | V          |
| $T_J$     | Maximum Junction Temperature                                  |                  | -40  |      | 175  | $^\circ C$ |
| $T_{JOP}$ | Maximum Operating Junction Temperature Range <sup>note2</sup> |                  | -40  |      | 150  | $^\circ C$ |
| $T_{stg}$ | Storage Temperature                                           |                  | -40  |      | 125  | $^\circ C$ |
| CTI       | Comparative Tracking Index                                    |                  | 200  |      |      |            |
| M         | Power Terminals Screw:M5                                      |                  | 3.0  |      | 5.0  | N·m        |
| M         | Mounting Screw:M6                                             |                  | 4.0  |      | 6.0  | N·m        |
| G         | Weight                                                        |                  |      | 165  |      | g          |

note2:  $T_{JOP} > 150^\circ C$  is only allowed for operation at overload conditions.

### Ordering Information Table

|             |   |   |     |    |     |     |   |
|-------------|---|---|-----|----|-----|-----|---|
| Device code | G | T | 150 | HF | 120 | T1V | H |
|             | ① | ② | ③   | ④  | ⑤   | ⑥   | ⑦ |

- ① - IGBT Module
- ② - Field Stop Trench Gate IGBT
- ③ - Rated Current (150=150A)
- ④ - Circuit Configuration (Half Bridge)
- ⑤ - Rated Voltage (120=1200V)
- ⑥ - Package Type
- ⑦ - Test Level (Pass the Important Reliability Test-Industrial Grade)

# GT150HF120T1VH

## IGBT Module Datasheet



### Characteristic diagram

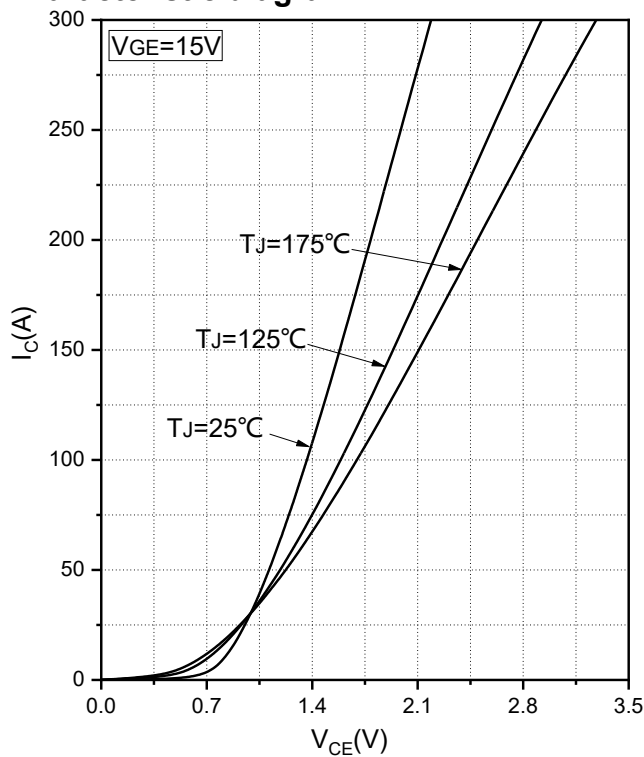


Fig.1 Typical Saturation Voltage Characteristics

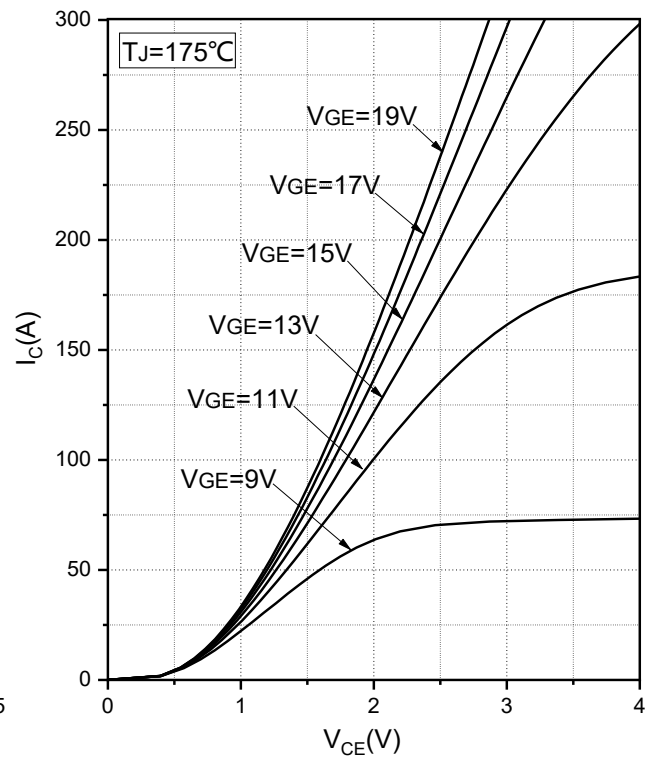


Fig.2 Typical Output Characteristics

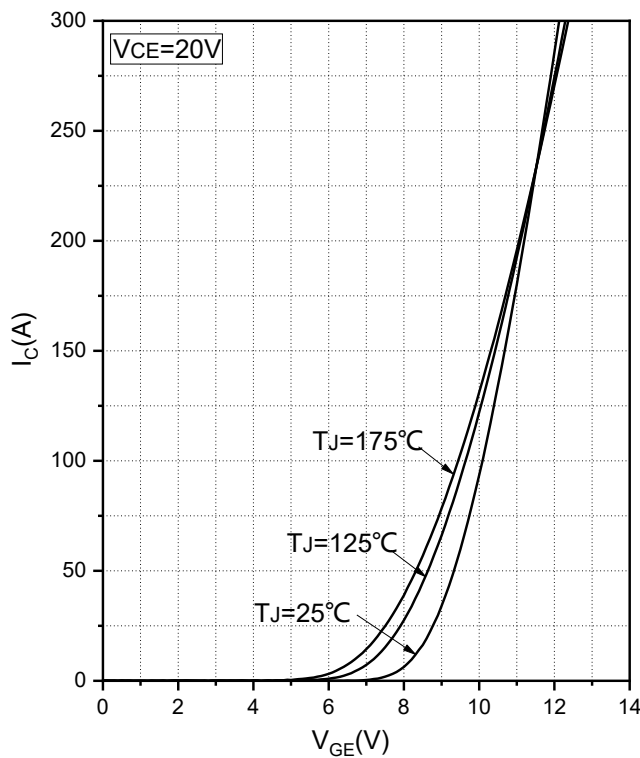


Fig.3 Transfer Characteristic

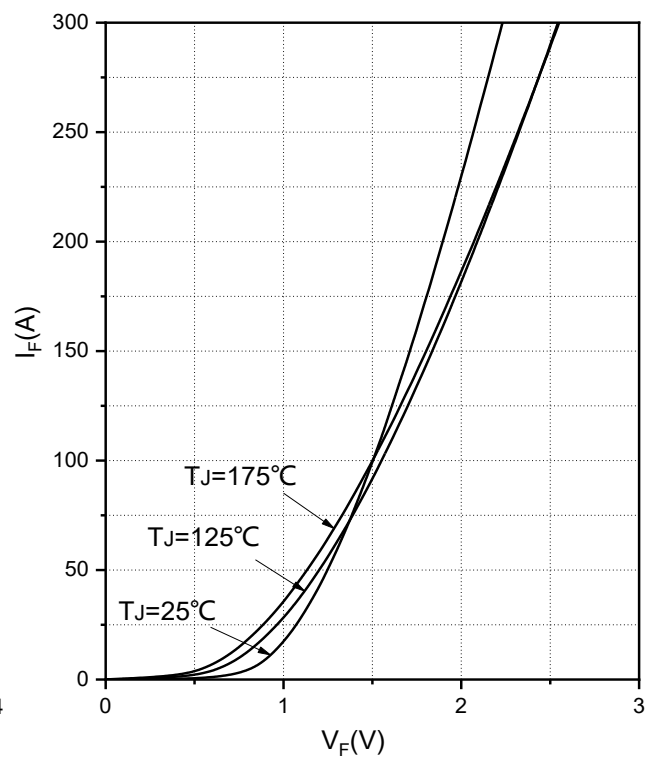


Fig.4 Forward Characteristics of Diode

# GT150HF120T1VH

## IGBT Module Datasheet

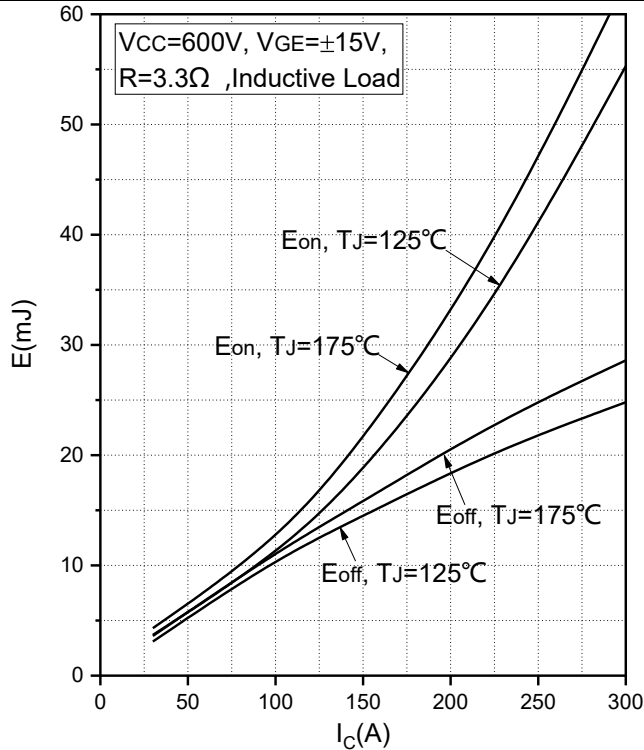


Fig.5 Typical Switching Loss vs. Collector Current

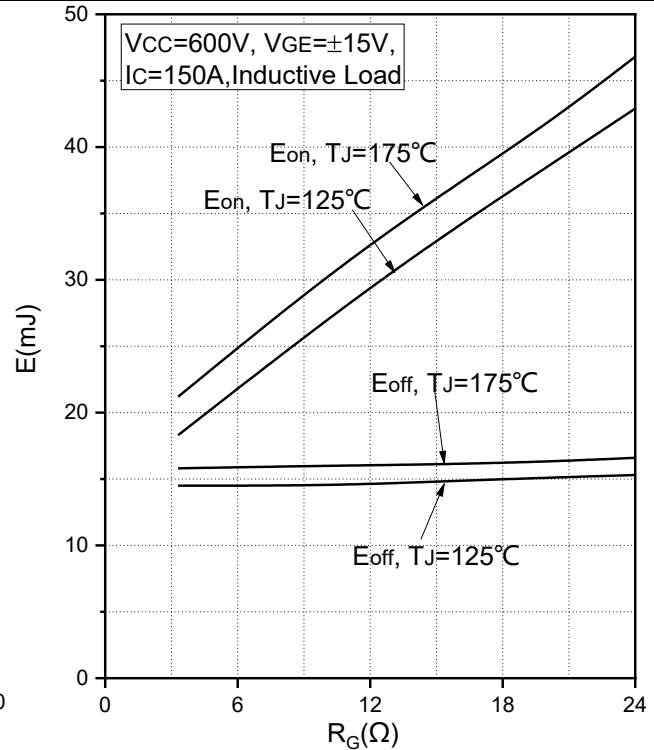


Fig.6 Typical Switching Loss vs. Gate Resistance

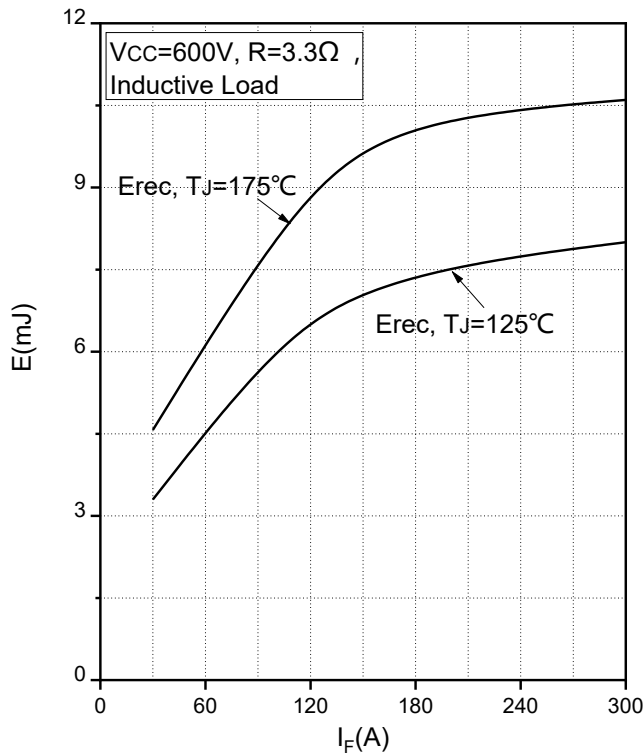


Fig.7 Typical Switching Loss vs. Forward Current

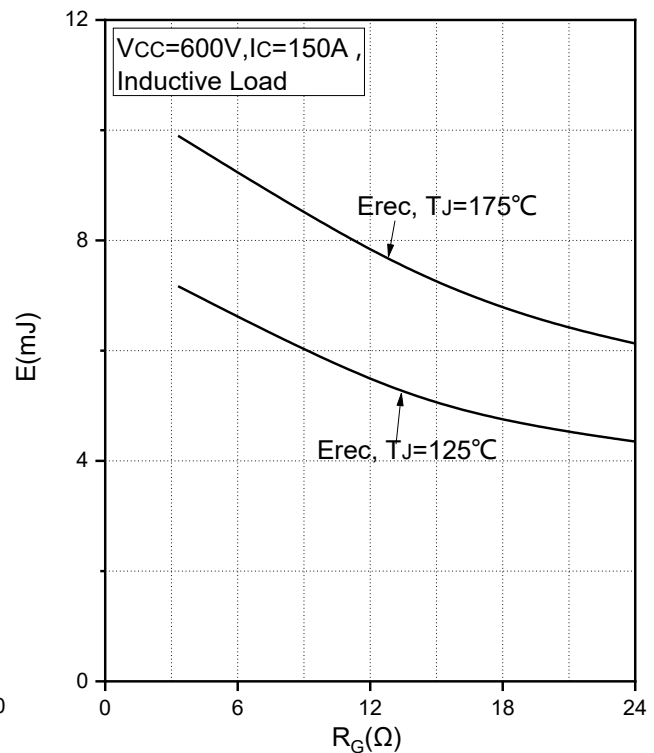


Fig.8 Typical Switching Loss vs. Gate Resistance

# GT150HF120T1VH

## IGBT Module Datasheet

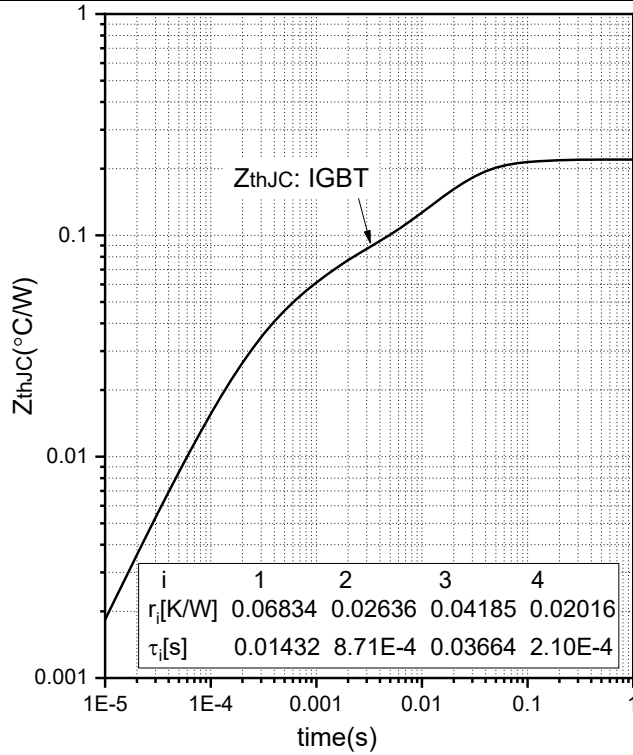


Fig.9 Transient Thermal Impedance (IGBT)

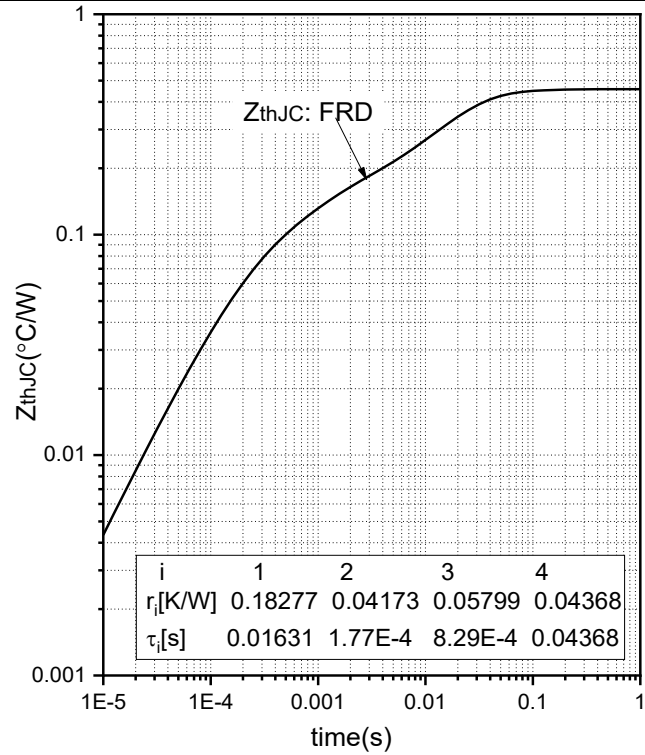


Fig.10 Transient Thermal Impedance (Diode)

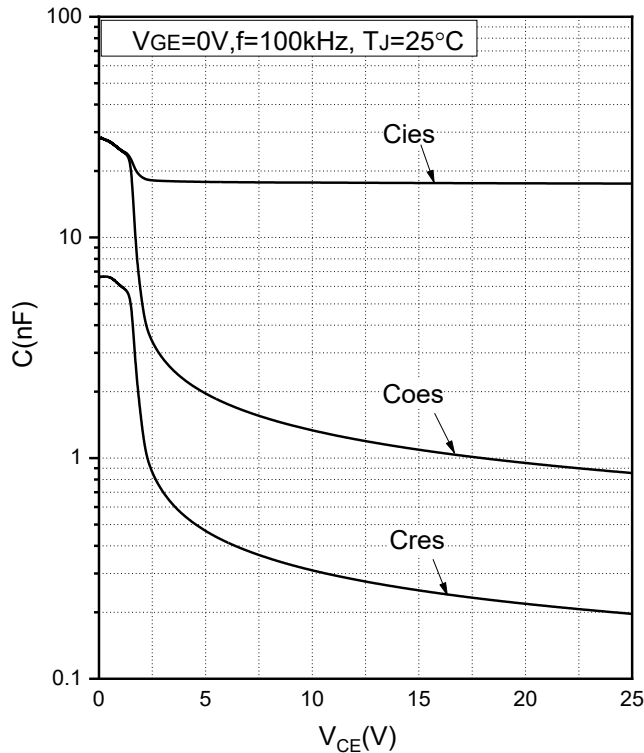


Fig.11 Capacitance Characteristics

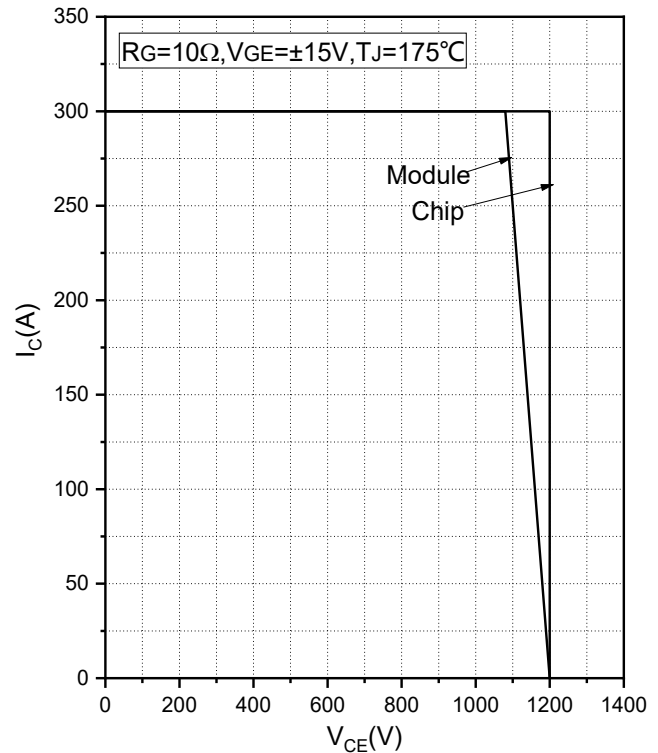


Fig.12 Reverse Bias Safe Operation Area (RBSOA)

# GT150HF120T1VH

## IGBT Module Datasheet

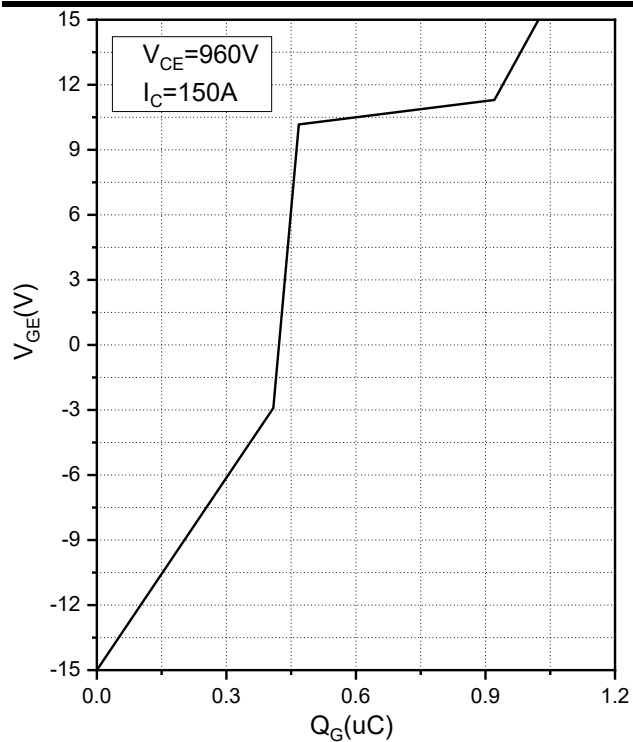



Fig.13 Gate Charge Characteristics

# GT150HF120T1VH


## IGBT Module Datasheet



### Internal Circuit:

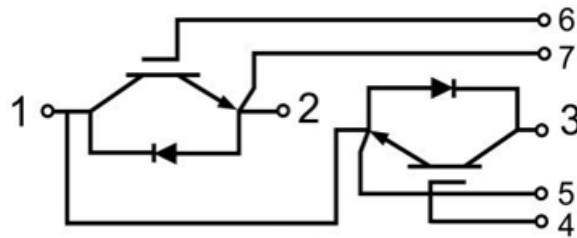

### Package Outline (Unit: mm):

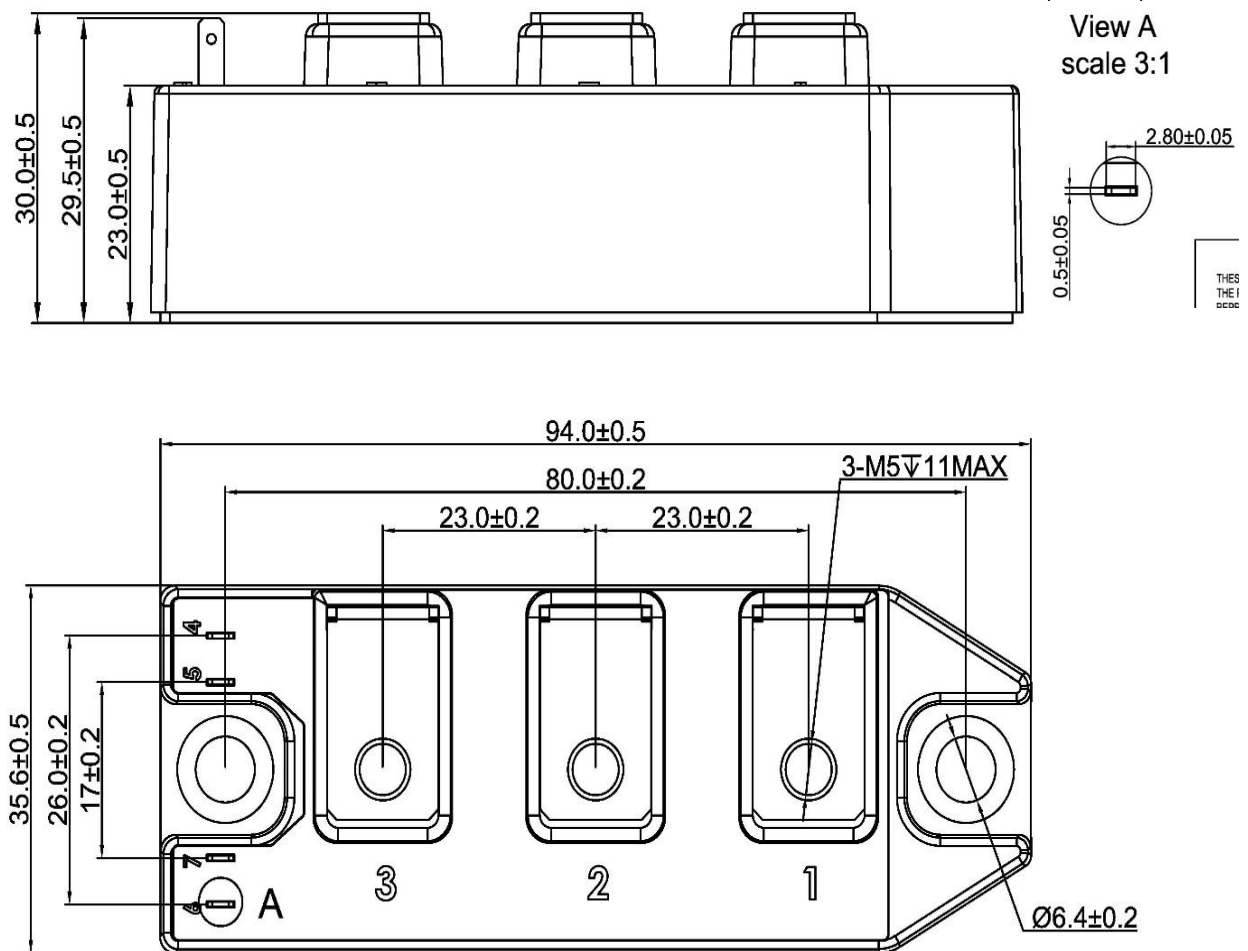

# GT150HF120T1VH

## IGBT Module Datasheet



| Revision | Notes                          |
|----------|--------------------------------|
| A        | Fina Datasheet Initial Release |
|          |                                |

### Announcement

Information in this document is believed to be accurate and reliable. However, NJSME does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

### Right to Make Changes

NJSME reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

The datasheet with “REV.” + “Arabic numerals” is based on engineering data for initial reference purpose only.

The released datasheet would be issued with “REV.” + “alphabet characters”.