



GT200HF65T1VH


IGBT Module

Preliminary Data

Features:

- Trench & Field Stop IGBT
- Short Circuit Rated $>10\mu\text{s}$
- Low Saturation Voltage
- Low Switching Loss
- 100% RBSOA Tested ($2\times I_c$)
- Low Stray Inductance
- Lead Free, Compliant with RoHS Requirement

Circuit Diagram

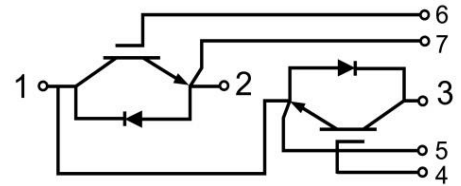

Applications:

- High Power Converters
- Motor Drives
- UPS Systems
- Wind Turbines

IGBT, Inverter

Maximum Rated Values ($T_c=25^\circ\text{C}$ Unless otherwise specified)

V_{CES}	Collector-Emitter Blocking Voltage		650	V
V_{GES}	Gate-Emitter Voltage		± 20	V
I_c	Continuous Collector Current	$T_c=100^\circ\text{C}$	200	A
		$T_c=25^\circ\text{C}$	400	A
I_{CM}	Repetitive Peak Collector Current	$t_p=1\text{ms}$	400	A
P_D	Maximum Power Dissipation per IGBT	$T_c=25^\circ\text{C}$ $T_{Jmax}=175^\circ\text{C}$	698	W



Electrical Characteristics of IGBT (T_C=25°C Unless otherwise specified)

Static characteristics

Symbol	Description	Conditions	Min.	Typ.	Max.	Units
V _{GE(th)}	Gate-Emitter Threshold Voltage	I _C =2mA, V _{CE} =V _{GE}	4.0	4.4	6.0	V
V _{CE(sat)}	Collector-Emitter Saturation Voltage	I _C =200A, V _{GE} =15V	T _J =25°C	1.50	1.80	V
			T _J =125°C	1.70		V
			T _J =150°C	1.75		V
I _{CES}	Collector-Emitter Leakage Current	V _{GE} =0V, V _{CE} =V _{CES} , T _J =25°C			1	mA
I _{GES}	Gate-Emitter Leakage Current	V _{GE} =±20V, V _{CE} =0V, T _J =25°C			±200	nA
C _{ies}	Input Capacitance	V _{CE} =25V, V _{GE} =0V, f=100kHz		14.4		nF
C _{oes}	Output Capacitance			0.83		nF
C _{res}	Reveres Transfer Capacitance			0.29		nF

Switching Characteristics

t _{d(on)}	Turn-on Delay Time	V _{CC} =300V, I _C =200A, R _{Gon} =4.7Ω, V _{GE} =±15V, Inductive Load	T _J =25℃		171		ns
			T _J =125℃		177		
			T _J =150℃		185		
t _r	Rise Time		T _J =25℃		83		ns
			T _J =125℃		84		
			T _J =150℃		91		
t _{d(off)}	Turn-off Delay Time		T _J =25℃		181		ns
			T _J =125℃		184		
			T _J =150℃		189		
t _f	Fall Time	T _J =25℃		48		ns	
		T _J =125℃		53			
		T _J =150℃		56			
E _{on}	Turn-on Switching Loss	V _{CC} =300V, I _C =200A, R _{Gon} =4.7Ω, V _{GE} =±15V, di/dt=813A/μs(T _J =150℃), Inductive Load	T _J =25℃		3.0		mJ
			T _J =125℃		3.3		
			T _J =150℃		3.5		



E_{off}	Turn-off Switching Loss	$V_{CC}=300V$, $I_C=200A$, $R_{Goff}=4.7\Omega$, $V_{GE}=\pm 15V$, $du/dt=2124V/\mu s$ ($T_J=150^\circ C$), Inductive Load	$T_J=25^\circ C$		5.4		mJ
			$T_J=125^\circ C$		6.0		
			$T_J=150^\circ C$		6.2		
Q_g	Total Gate Charge	$V_{GE}=+15V \dots -15V$	$T_J=25^\circ C$		988		nC
$R_{g \text{ internal}}$	Internal Gate Resistor				2.35		Ω
I_{SC}	$V_{CC}=300V$, $V_{GE}=\pm 15V$, $t=10\mu s$, $T_J=150^\circ C$				1200		A
$R_{\theta JC}$	Thermal Resistance: Junction-to-Case (per IGBT)					0.21	$^\circ C/W$

Diode, Inverter

Maximum Rated Values ($T_C=25^\circ C$ Unless otherwise specified)

V_{RRM}	Repetitive Peak Reverse Voltage	$T_J=25^\circ C$	650	V
I_F	Diode Continuous Forward Current	$T_C=100^\circ C$	200	A
I_{FM}	Peak FWD Current Repetitive	$t_P=1ms$	400	A

Electrical Characteristics of FWD ($T_C=25^\circ C$ Unless otherwise specified)

Symbol	Description	Conditions		Min.	Typ.	Max.	Units
V _{FM}	Forward Voltage	I _F =200A	T _J =25℃		1.65		V
			T _J =125℃		1.75		
			T _J =150℃		1.70		
t _{rr}	Reverse Recovery Time	I _F =200A, -diF/dt=1002A/μs(T _J =150℃), V _{rr} =300V, V _{GE} =-15V	T _J =25℃		134		ns
			T _J =125℃		171		
			T _J =150℃		188		
I _{rr}	Peak Reverse Recovery Current		T _J =25℃		50		A
			T _J =25℃		72		
			T _J =150℃		78		
Q _{rr}	Reverse Recovery Charge		T _J =25℃		3.96		μC
			T _J =125℃		7.88		
			T _J =150℃		9.41		



E _{rec}	Reverse Recovery Energy	I _F =200A, -diF/dt=1002A/μs(T _J =150℃), V _{rr} =300V, V _{GE} =-15V	T _J =25℃		0.73		mJ
			T _J =125℃		1.45		
			T _J =150℃		1.92		
R _{θJC}	Thermal Resistance: Junction-to-Case (per Diode)					0.36	℃/W

Module

Symbol	Description		Min.	Typ.	Max.	Units
V _{iso}	Isolation Voltage (All Terminals Shorted)	RMS, f=50Hz, 1minute	2500			V
T _J	Maximum Junction Temperature				175	℃
T _{JOP}	Maximum Operating Junction Temperature Range		-40		+150	℃
T _{stg}	Storage Temperature		-40		+125	℃
CTI	Comparative Tracking Index		200			
R _{θCS}	Case-to-Sink Thermally (Conductive Grease Applied)				0.07	℃/W
T	Power Terminals Screw:M5		3.0		5.0	N·m
T	Mounting Screw:M6		4.0		6.0	N·m
G	Weight			165		g

Ordering Information Table

Device code

G	T	200	HF	65	T1V	H
①	②	③	④	⑤	⑥	⑦

- ① - IGBT Module
- ② - Trench & Field Stop IGBT
- ③ - Rated Current (200=200A)
- ④ - Circuit Configuration: HF (Half Bridge)
- ⑤ - Rated Voltage (65=650V)
- ⑥ - Package Type
- ⑦ - Test Level (Pass the Important Reliability Test-Industrial Grade)

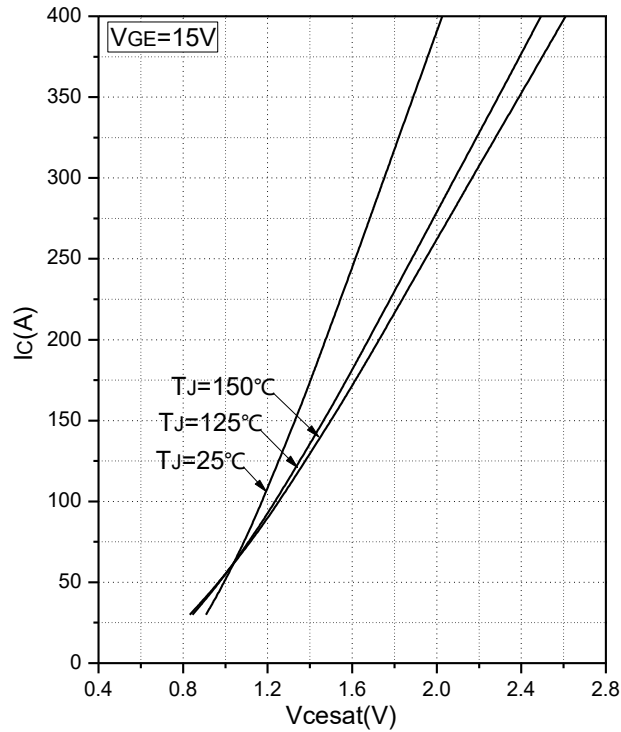


Fig.1 Typical Saturation Voltage Characteristics

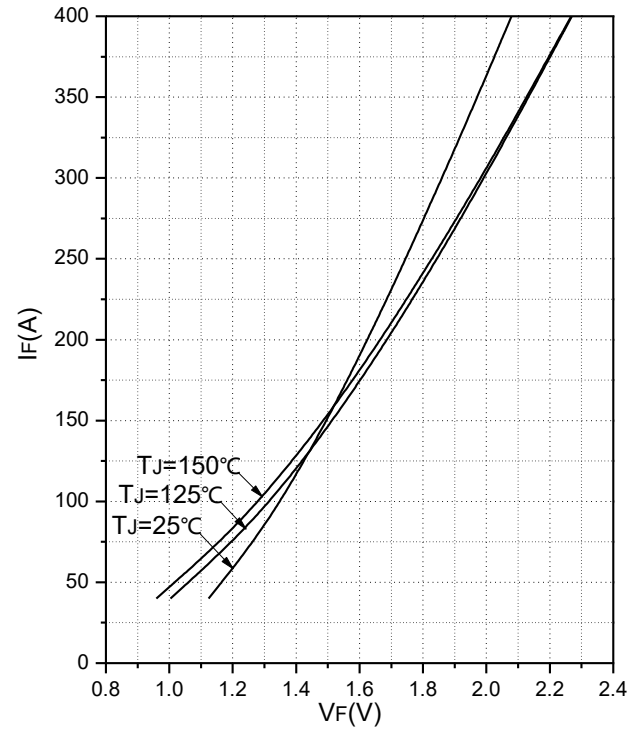


Fig.2 Forward Characteristics of Diode

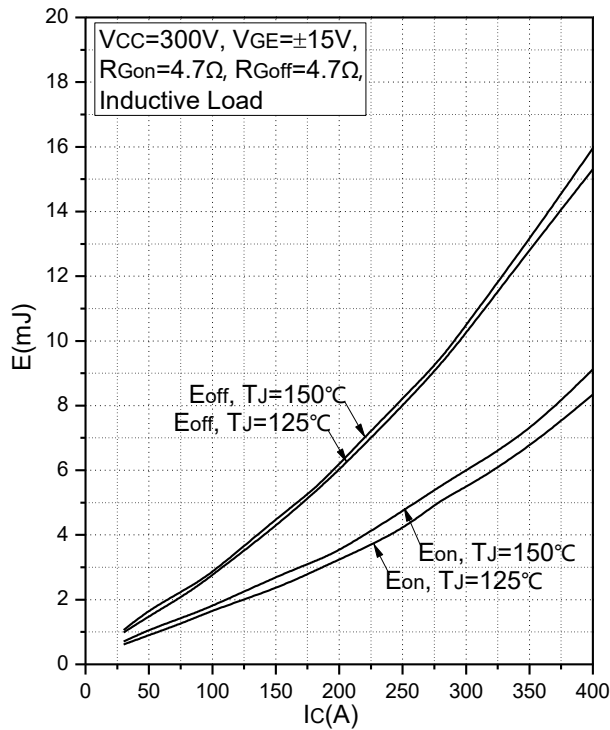


Fig.3 Typical Switching Loss vs. Collector Current

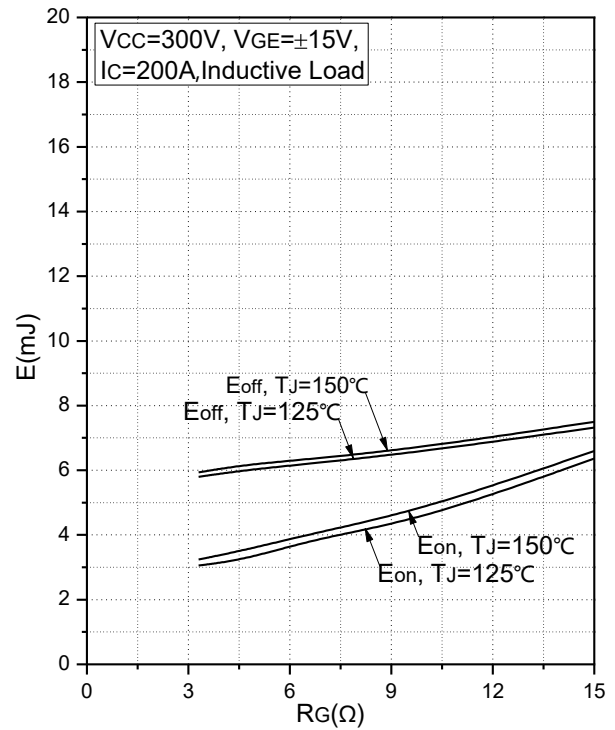


Fig.4 Typical Switching Loss vs. Gate Resistance

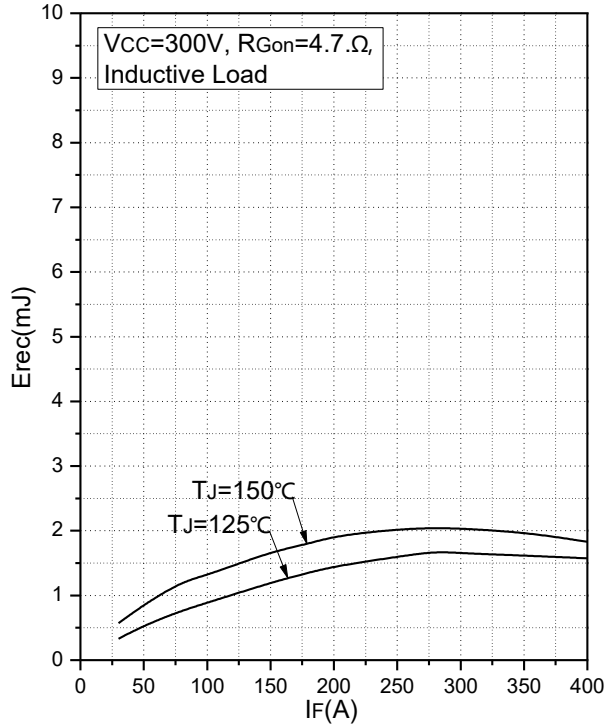


Fig.5 Typical Switching Loss vs. Forward Current

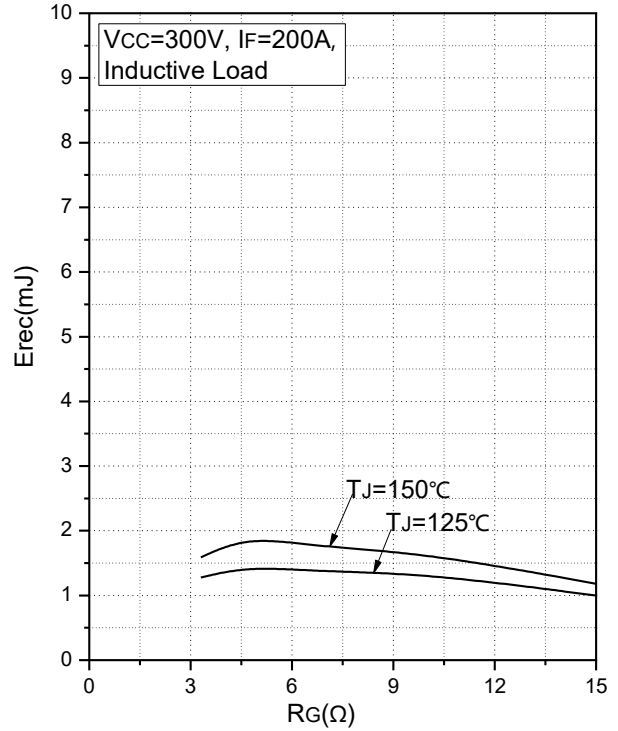


Fig.6 Typical Switching Loss vs. Gate Resistance

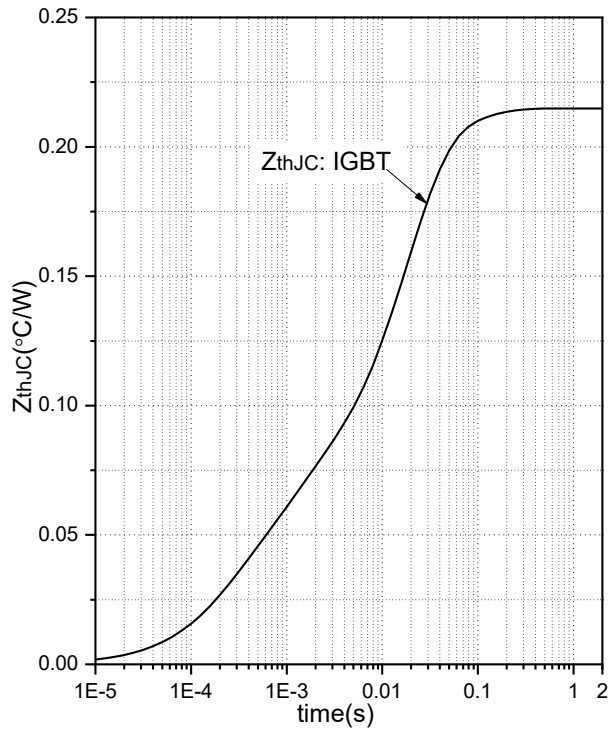


Fig.7 Transient Thermal Impedance (IGBT)

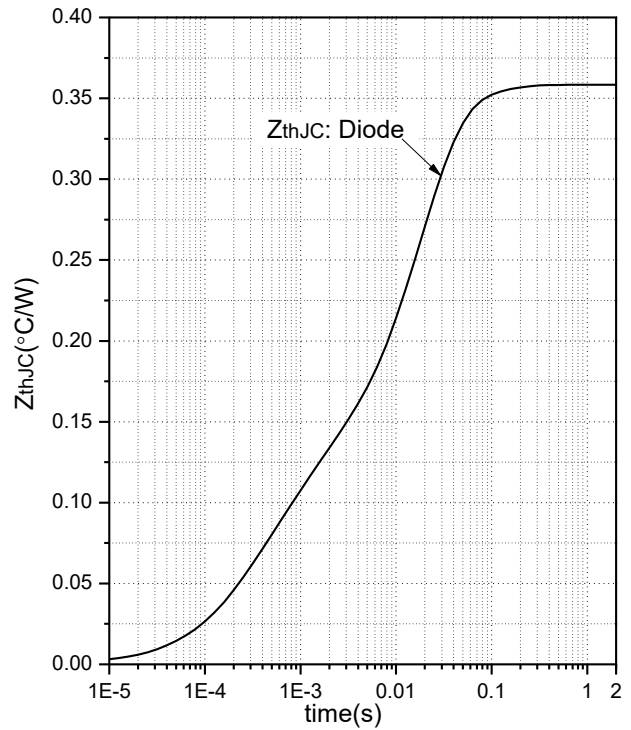


Fig.8 Transient Thermal Impedance (Diode)

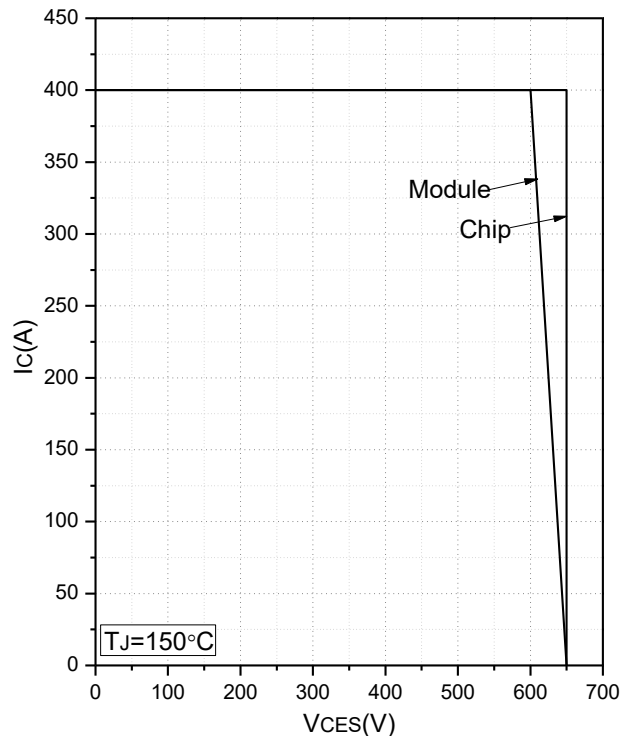


Fig.9 Reverse Bias Safe Operation Area (RBSOA)


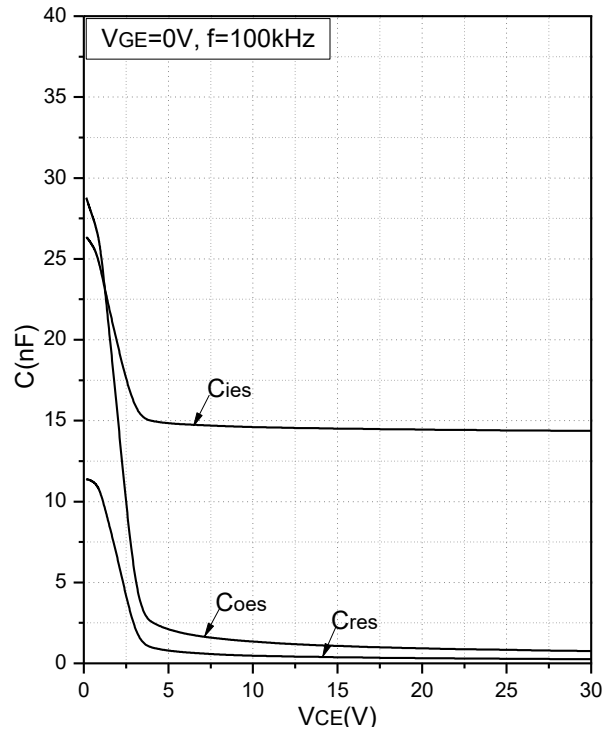



Fig.10 Capacitance Characteristics




Internal Circuit:

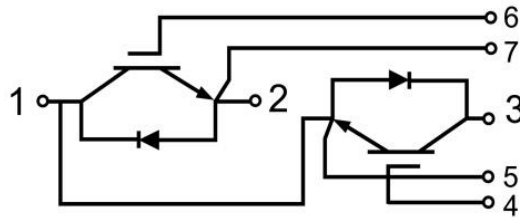

Package Outline (Unit: mm):

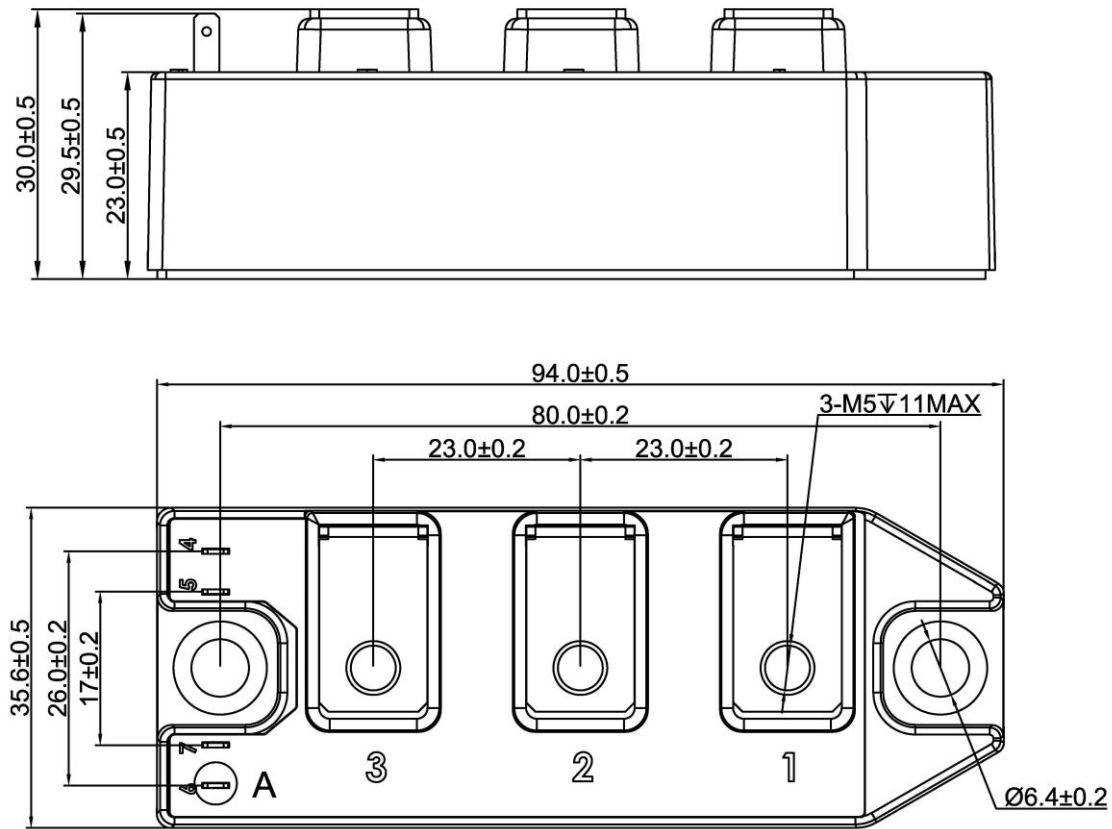

View A
scale 3:1





Revision	Notes
01	Initial Release

Announcements

Information in this document is believed to be accurate and reliable. However, NJSME does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to Make Changes

NJSME reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

The datasheet with “REV.” + “Arabic numerals” is based on engineering data for initial reference purpose only.

The released datasheet would be issued with “REV.” + “alphabet characters”.