



GT25FF120B2H


IGBT Module

Preliminary Data

Features:

- Field Stop Trench Gate IGBT
- Short Circuit Rated $>10\mu\text{s}$
- Low Saturation Voltage
- Low Switching Loss
- 100% RBSOA Tested($2\times I_c$)
- Low Stray Inductance
- Lead Free, Compliant with RoHS Requirement

Circuit Diagram

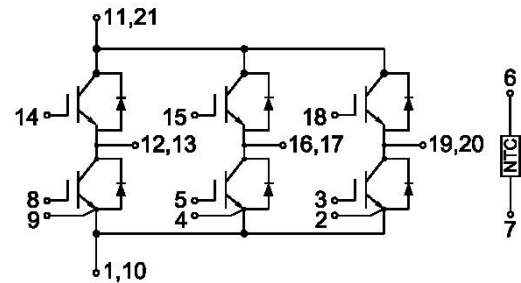

Applications:

- Industrial Inverters
- Servo Applications

IGBT, Inverter

Maximum Rated Values($T_c=25^\circ\text{C}$ unless otherwise specified)

V_{CES}	Collector-Emitter Blocking Voltage	$T_J=25^\circ\text{C}$	1200	V
V_{GES}	Gate-Emitter Voltage		± 20	V
I_C	Continuous Collector Current	$T_c=100^\circ\text{C}$	25	A
		$T_c=25^\circ\text{C}$	50	A
I_{CM}	Repetitive Peak Collector Current	$t_p=1\text{ms}$	50	A
P_D	Maximum Power Dissipation per IGBT	$T_c=25^\circ\text{C}$ $T_{Jmax}=175^\circ\text{C}$	279	W



Electrical Characteristics of IGBT($T_C=25^{\circ}\text{C}$ unless otherwise specified)

Static Characteristics

Symbol	Description	Conditions	Min.	Typ.	Max.	Units
$V_{GE(th)}$	Gate-Emitter Threshold Voltage	$I_C=1\text{mA}$, $V_{CE}=V_{GE}$, $T_J=25^{\circ}\text{C}$	5.00	5.60	6.50	V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=25\text{A}$, $V_{GE}=15\text{V}$	$T_J=25^{\circ}\text{C}$	1.70	1.90	V
			$T_J=125^{\circ}\text{C}$	1.95		
			$T_J=150^{\circ}\text{C}$	2.00		
I_{CES}	Collector-Emitter Leakage Current	$V_{GE}=0\text{V}$, $V_{CE}=V_{CES}$, $T_J=25^{\circ}\text{C}$			1	mA
I_{GES}	Gate-Emitter Leakage Current	$V_{GE}=\pm 20\text{V}$, $V_{CE}=0\text{V}$, $T_J=25^{\circ}\text{C}$			± 100	nA
C_{ies}	Input Capacitance	$V_{CE}=25\text{V}$, $V_{GE}=0\text{V}$, $f=100\text{kHz}$, $T_J=25^{\circ}\text{C}$		2.42		nF
C_{oes}	Output Capacitance			0.17		
C_{res}	Reverse Transfer Capacitance			0.02		

Switching Characteristics

Switching Characteristics							
$t_{d(on)}$	Turn-on Delay Time	$V_{CC}=600V, I_C=25A,$ $R_{Gon}=20\Omega, V_{GE}=\pm 15V,$ Inductive Load	$T_J=25^{\circ}C$		102		ns
			$T_J=125^{\circ}C$		99		
			$T_J=150^{\circ}C$		99		
t_r	Rise Time		$T_J=25^{\circ}C$		39		ns
			$T_J=125^{\circ}C$		39		
			$T_J=150^{\circ}C$		37		
$t_{d(off)}$	Turn-off Delay Time	$V_{CC}=600V, I_C=25A,$ $R_{Goff}=20\Omega, V_{GE}=\pm 15V,$ Inductive Load	$T_J=25^{\circ}C$		138		ns
			$T_J=125^{\circ}C$		147		
			$T_J=150^{\circ}C$		145		
t_f	Fall Time		$T_J=25^{\circ}C$		494		ns
			$T_J=125^{\circ}C$		723		
			$T_J=150^{\circ}C$		728		
E_{on}	Turn-on Switching Loss	$V_{CC}=600V, I_C=25A,$ $R_{Gon}=20\Omega, V_{GE}=\pm 15V,$ $di/dt=548A/\mu s$ ($T_J=150^{\circ}C$) Inductive Load	$T_J=25^{\circ}C$		2.14		mJ
			$T_J=125^{\circ}C$		2.76		
			$T_J=150^{\circ}C$		2.97		



E _{off}	Turn-off Switching Loss	V _{CC} =600V, I _C =25A, R _{Goff} =20Ω, V _{GE} =±15V, du/dt=2299V/μs (T _J =150°C) Inductive Load	T _J =25°C		1.97		mJ
			T _J =125°C		3.22		
			T _J =150°C		3.54		
Q _g	Total Gate Charge	V _{GE} =+15V...-15V	T _J =25°C		129		nC
R _{g internal}	Internal Gate Resistance		T _J =25°C		0		Ω
RBSOA	I _C =50A, V _{CC} =1050V, V _p =1200V, R _{Goff} =20Ω, V _{GE} =+15V to 0V, T _J =150°C			Trapezoid			
SCSOA	V _{CC} =600V, V _{GE} =±15V, R _{Gon} =20Ω, R _{Goff} =20Ω, T _J =125°C			10			μs
R _{θJC}	Thermal Resistance: Junction-to-Case (per IGBT)					0.538	°C/W

Diode, Inverter

Maximum Rated Values(T_C=25°C unless otherwise specified)

V _{RRM}	Repetitive Peak Reverse Voltage	T _J =25°C	1200	V
I _F	Diode Continuous Forward Current		25	A
I _{FM}	Diode Maximum Forward Current	tp=1ms	50	A

Electrical Characteristics of Diode(T_C=25°C unless otherwise specified)

Symbol	Description	Conditions		Min.	Typ.	Max.	Units
V _{FM}	Forward Voltage	I _F =25A	T _J =25℃		1.65		V
			T _J =125℃		1.70		
			T _J =150℃		1.70		
t _{rr}	Reverse Recovery Time	I _F =25A, -diF/dt=695A/μs(T _J =150℃), V _R =600V, V _{GE} =-15V	T _J =25℃		213		ns
			T _J =125℃		441		
			T _J =150℃		458		
I _{rr}	Peak Reverse Recovery Current		T _J =25℃		24.4		A
			T _J =125℃		29.1		
			T _J =150℃		30.3		
Q _{rr}	Reverse Recovery Charge		T _J =25℃		2.60		μC
			T _J =125℃		4.97		
			T _J =150℃		5.52		



E _{rec}	Reverse Recovery Energy	I _F =25A, -diF/dt=695A/μs(T _J =150℃), V _R =600V, V _{GE} =-15V	T _J =25℃		0.85		mJ
			T _J =125℃		1.95		
			T _J =150℃		2.18		
R _{θJC}	Diode Thermal Resistance: Junction-to-Case(per Diode)					0.693	℃/W

Internal NTC-Thermistor Characteristics

Symbol	Conditions	Min.	Typ.	Max.	Units
R ₂₅	T _C =25°C		22.7		kΩ
ΔR/R	T _C =100°C, R ₁₀₀ =1481Ω			±3	%
P ₂₅	T _C =25°C	5			mW
B _{25/50}	R ₂ =R ₂₅ exp[B _{25/50} (1/T ₂ -1/(298.15K))]	3950			K
B _{25/80}	R ₂ =R ₂₅ exp[B _{25/80} (1/T ₂ -1/(298.15K))]	4000			K

Module

Symbol	Description		Min.	Typ.	Max.	Units
V _{iso}	Isolation Voltage (All Terminals Shorted)	RMS, f=50Hz, t=30s	4500			V
Internal Isolation			Al ₂ O ₃			
T _J	Maximum Junction Temperature				175	°C
T _{JOP}	Maximum Operating Junction Temperature Range		-40		+150	°C
T _{stg}	Storage Temperature		-40		+150	°C
CTI	Comparative Tracking Index		200			
R _{θCS}	Case-To-Sink Thermally (Conductive Grease Applied)				0.09	°C/W
T	Mounting Screw:M4		1.0		1.2	N·m
G	Weight			25		g



Ordering Information Table

Device code	G	T	25	FF	120	B2	H
	①	②	③	④	⑤	⑥	⑦

- ① - IGBT Module
- ② - Trench, Low Switching Losses IGBT
- ③ - Rated Current (25=25A)
- ④ - Circuit Configuration: FF (Full Bridge)
- ⑤ - Rated Voltage (120=1200V)
- ⑥ - Package Type
- ⑦ - Test Level (Pass the Important Reliability Test-Industrial Grade)

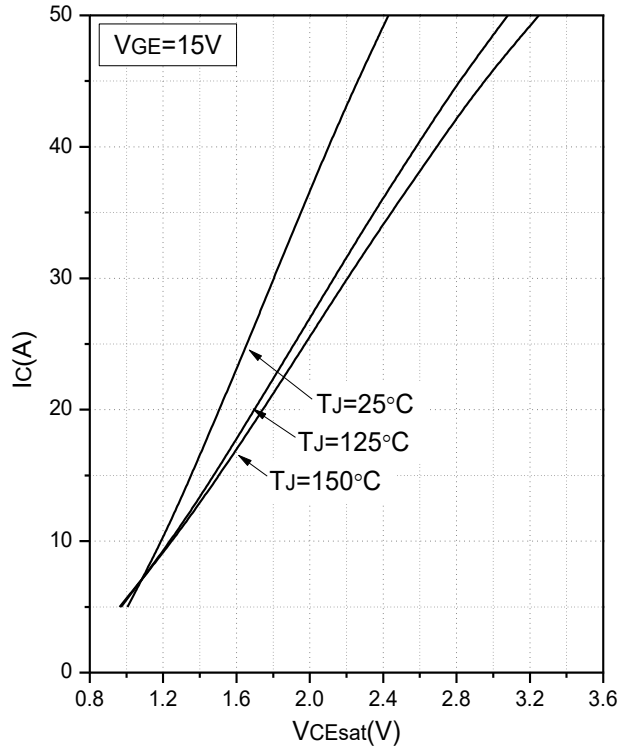


Fig.1 Typical Saturation Voltage Characteristics

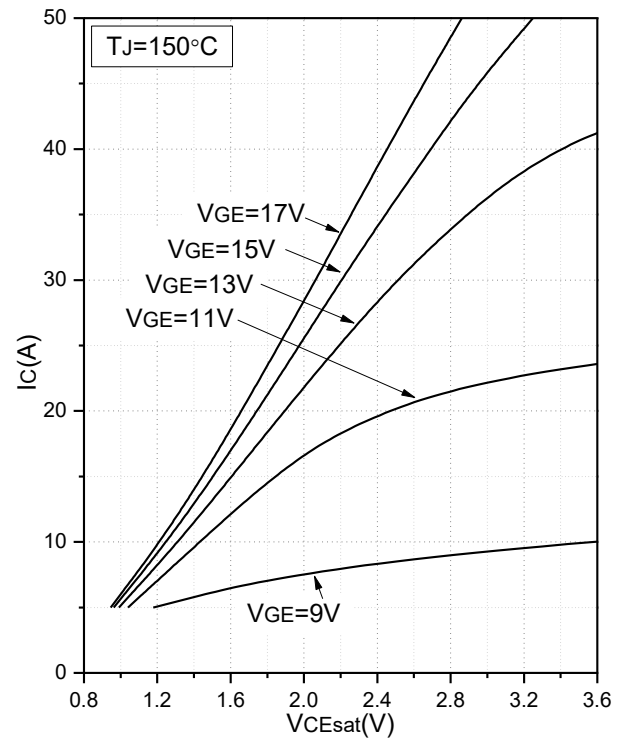


Fig.2 Typical Output Characteristics

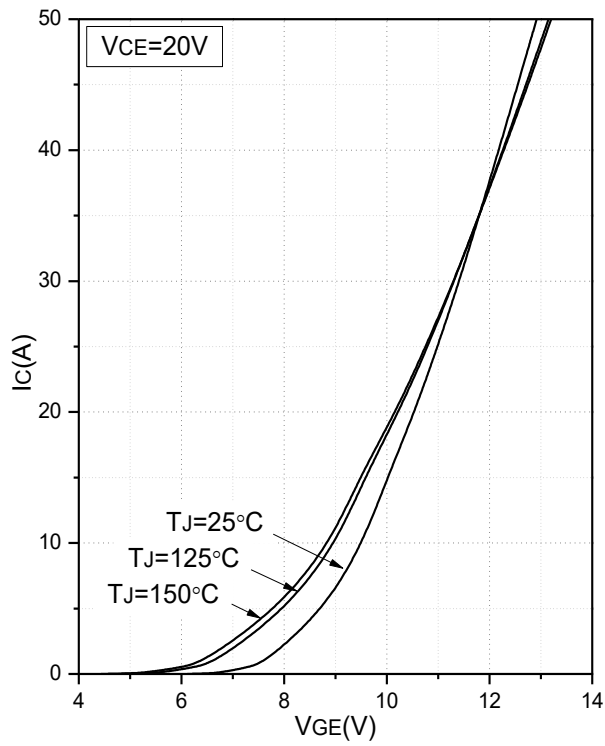


Fig.3 Transfer Characteristic

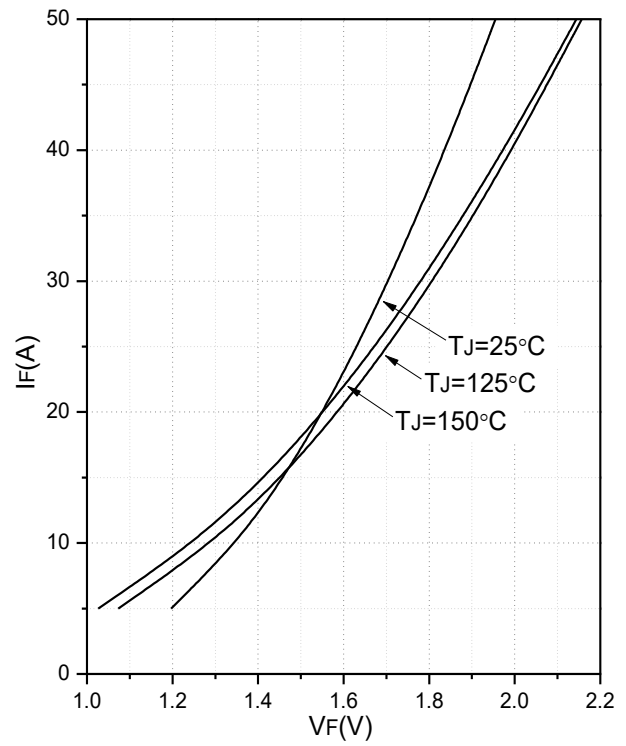


Fig.4 Forward Characteristics of Diode

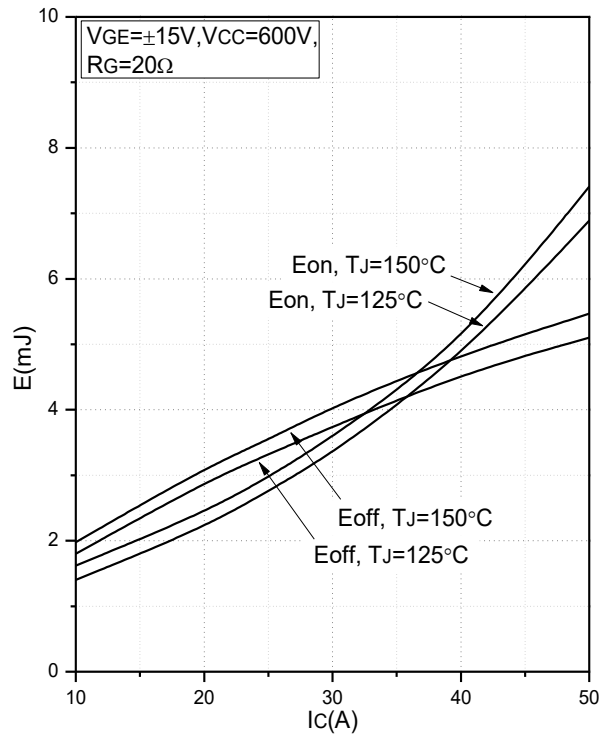


Fig.5 Typical Switching Loss vs. Collector Current

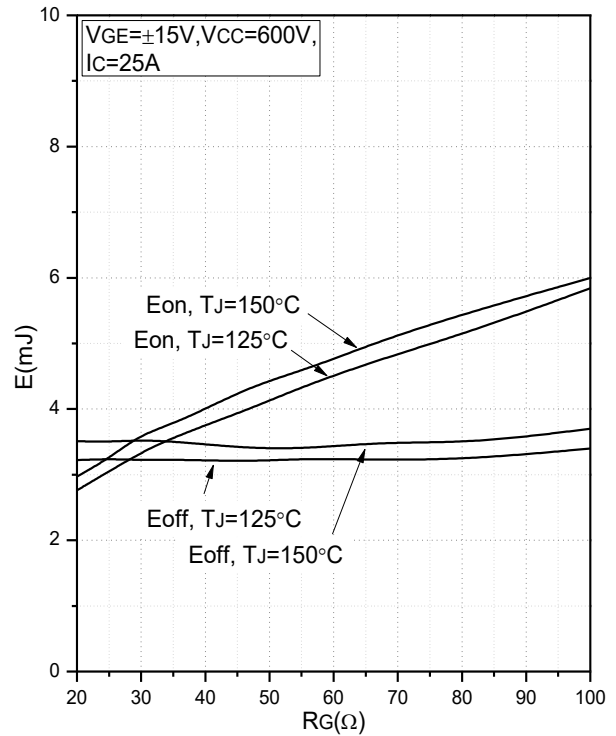


Fig.6 Typical Switching Loss vs. Gate Resistance

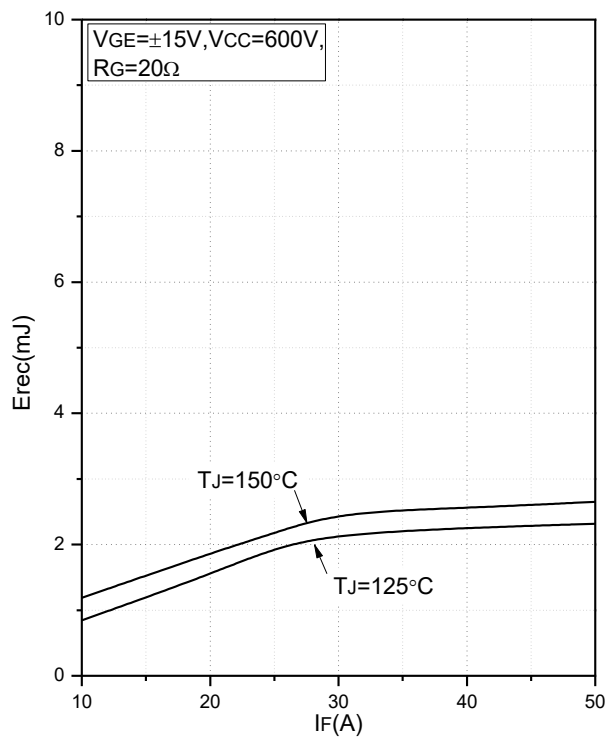


Fig.7 Typical Switching Loss vs. Forward Current

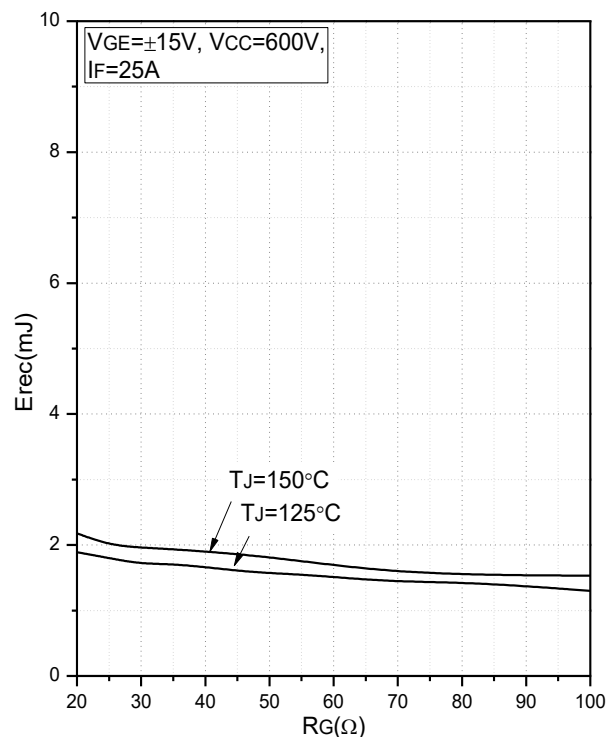


Fig.8 Typical Switching Loss vs. Gate Resistance

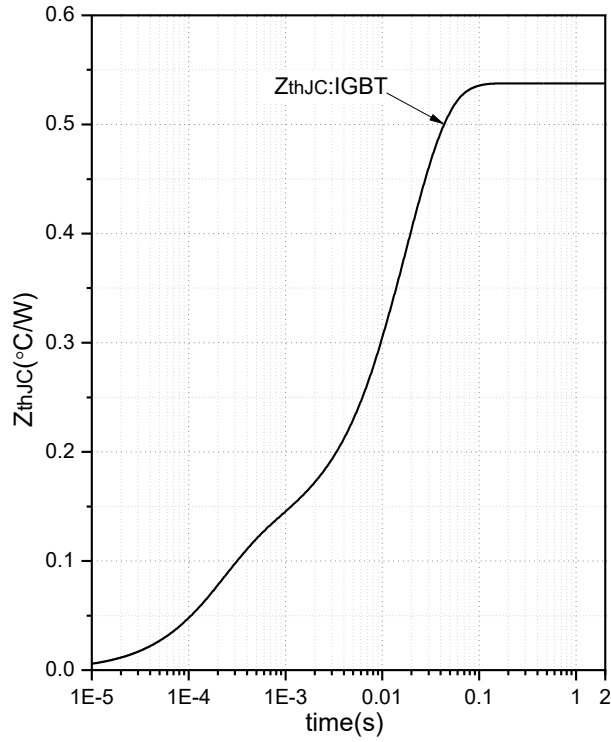


Fig.9 Transient Thermal Impedance IGBT(Inverter)

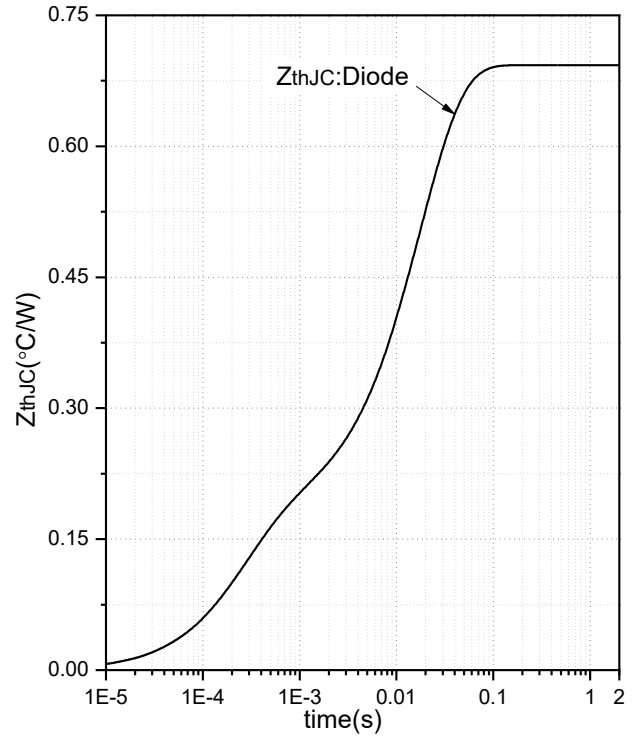


Fig.10 Transient Thermal Impedance Diode(Inverter)

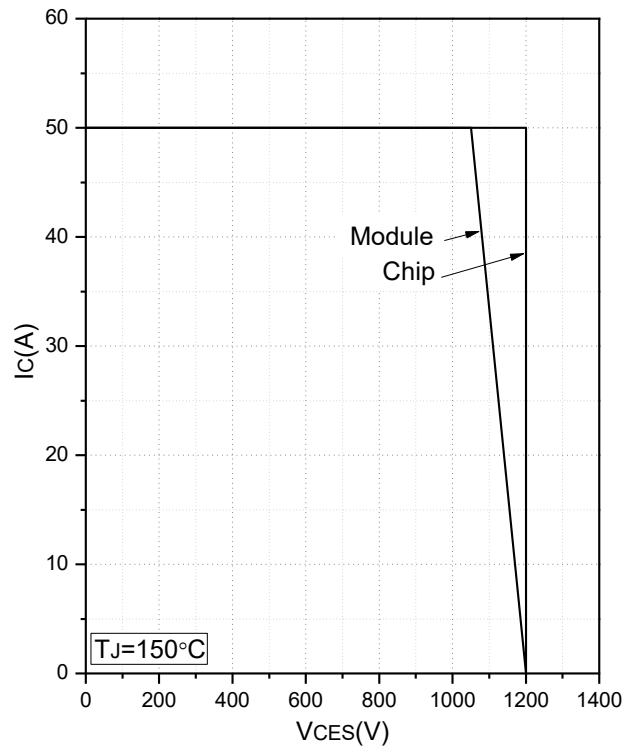


Fig.11 Reverse Bias Safe Operation Area (RBSOA)

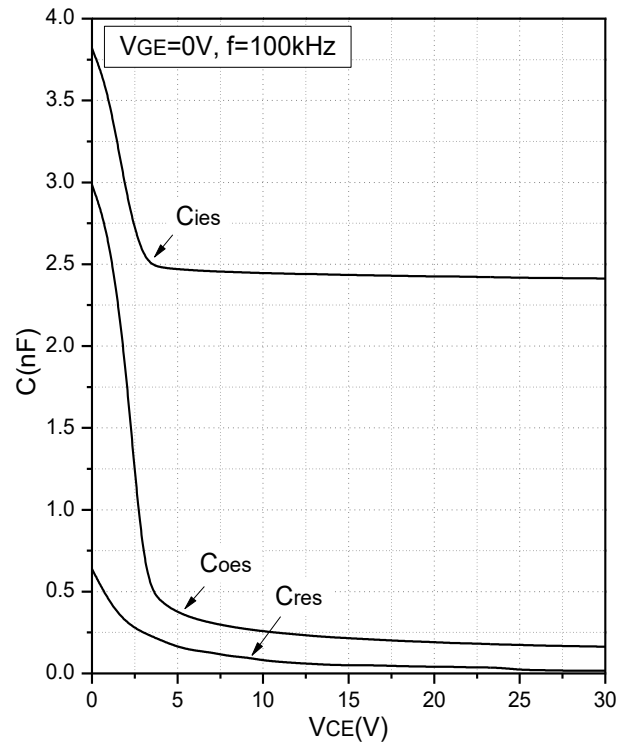


Fig.12 Capacitance Characteristics


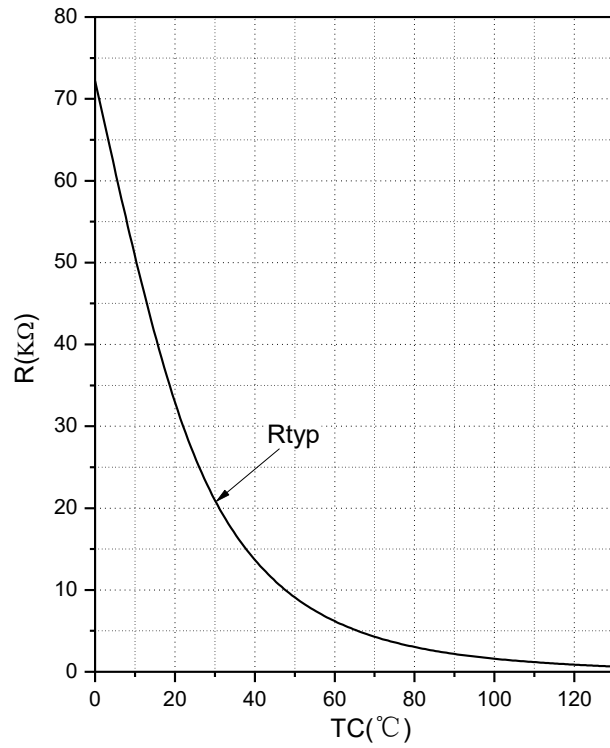



Fig.13 NTC Temperature Characteristics



Internal Circuit

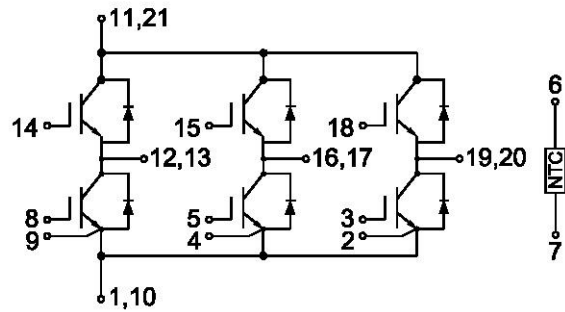

Package Outlines (Unit: mm):

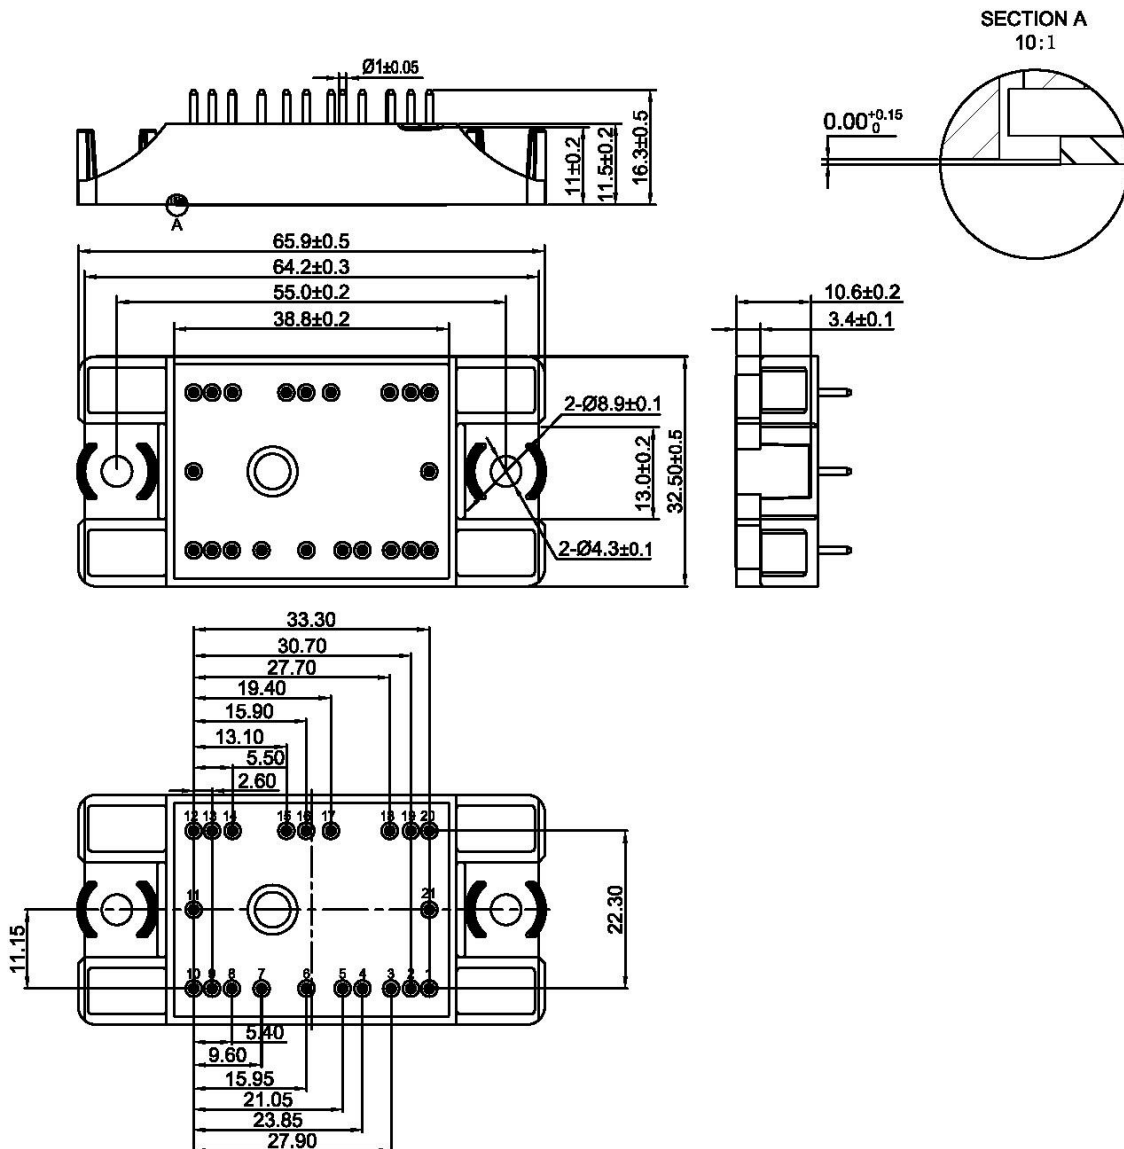



Date	Revision	Notes
03/12/2024	01	Initial Release

Announcement

Information in this document is believed to be accurate and reliable. However, NJSME does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to Make Changes

NJSME reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

The datasheet with “REV.” + “Arabic numerals” is based on engineering data for initial reference purpose only.

The released datasheet would be issued with “REV.” + “alphabet characters”.