


GT300HF170T2VH

IGBT Module

Circuit Diagram

Features:

- $V_{CES}=1700V$ $I_C=300A$ Trench & Field Stop IGBT Module
- Short Circuit Capability
- Low Saturation Voltage
- Low Switching Loss
- 100% RBSOA Tested($2 \times I_C$)
- Low Stray Inductance
- Lead Free, Compliant with RoHS Requirement

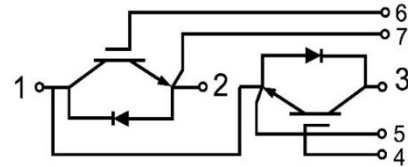

Applications:

- Industrial Inverters
- Motor Drives
- UPS Systems



Type	Package	Marking
GT300HF170T2VH	T2V	GT300HF170T2VH

IGBT, Inverter

Maximum Rated Values ($T_C=25^\circ C$ unless otherwise specified)

V_{CES}	Collector-Emitter Blocking Voltage		1700	V
V_{GES}	Gate-Emitter Voltage		± 20	V
I_C	Continuous Collector Current, Limited by T_{Jmax}	$T_C=90^\circ C$	300	A
		$T_C=25^\circ C$	600	A
I_{CM}	Peak Collector Current Repetitive	t_p limited by T_{Jmax}	600	A
P_D	Maximum Power Dissipation (IGBT)	$T_C=25^\circ C, T_{Jmax}=175^\circ C$	2380	W

GT300HF170T2VH

IGBT Module Datasheet



Electrical Characteristics of IGBT ($T_C=25^{\circ}\text{C}$ unless otherwise specified)

Static Characteristics

Symbol	Description	Conditions	Min.	Typ.	Max.	Units
$V_{GE(th)}$	Gate-Emitter Threshold Voltage	$I_C=12\text{mA}$, $V_{CE}=V_{GE}$	5.2	5.9	6.6	V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=300\text{A}$, $V_{GE}=15\text{V}$	$T_J=25^{\circ}\text{C}$	1.77	2.15	V
			$T_J=125^{\circ}\text{C}$	2.24		V
			$T_J=175^{\circ}\text{C}$	2.50		V
I_{CES}	Collector-Emitter Leakage Current	$V_{GE}=0\text{V}$, $V_{CE}=1700\text{V}$, $T_J=25^{\circ}\text{C}$			1	mA
I_{GES}	Gate-Emitter Leakage Current	$V_{GE}=20\text{V}$, $V_{CE}=0\text{V}$, $T_J=25^{\circ}\text{C}$			600	nA
C_{ies}	Input Capacitance	$V_{CE}=25\text{V}$, $V_{GE}=0\text{V}$, $f=100\text{kHz}$		28.95		nF
C_{oes}	Output Capacitance			1.73		nF
C_{res}	Reverse Transfer Capacitance			0.37		nF

Switching Characteristics

$t_{d(on)}$	Turn-on Delay Time	$V_{CC}=900V, I_C=300A,$ $R_{Gon}=1\Omega, V_{GE}=\pm 15V,$ Inductive Load	$T_J=25^{\circ}C$		122		ns
			$T_J=125^{\circ}C$		135		
			$T_J=175^{\circ}C$		142		
t_r	Rise Time		$T_J=25^{\circ}C$		38		ns
			$T_J=125^{\circ}C$		46		
			$T_J=175^{\circ}C$		54		
$t_{d(off)}$	Turn-off Delay Time		$T_J=25^{\circ}C$		353		ns
			$T_J=125^{\circ}C$		403		
			$T_J=175^{\circ}C$		419		
t_f	Fall Time	$T_J=25^{\circ}C$		297		ns	
		$T_J=125^{\circ}C$		346			
		$T_J=175^{\circ}C$		369			
E_{on}	Turn-on Switching Loss	$V_{CC}=900V, I_C=300A,$ $R_{Gon}=1\Omega, V_{GE}=\pm 15V,$ $di/dt=4400A/\mu s(T_J=175^{\circ}C)$ Inductive Load	$T_J=25^{\circ}C$		60		mJ
		$T_J=125^{\circ}C$		80			
		$T_J=175^{\circ}C$		89			

GT300HF170T2VH

IGBT Module Datasheet



E _{off}	Turn-off Switching Loss	V _{CC} =900V, I _C =300A, R _{Goff} =1Ω, V _{GE} =±15V, du/dt=5000V/μs(T _J =175°C) Inductive Load	T _J =25°C		46		mJ
			T _J =125°C		57		
			T _J =175°C		59		
Q _g	Total Gate Charge	V _{CE} =900V, V _{GE} =±15V, I _C =300A	T _J =25°C		2.33		μC
R _{G (int)}	Internal Gate Resistance		T _J =25°C		1.5		Ω
T _{sc}	V _{CC} =1000V, V _{GE} =±15V, T _J =150°C ^{note1}					10	μs
R _{θJC}	IGBT Thermal Resistance: Junction-to-Case (per IGBT)					0.063	°C/W
R _{θCS}	IGBT Thermal Resistance: Case-to-Sink (per IGBT) (per IGBT, λ _{grease} = 1 W/(m · K))				0.045		°C/W

note1: Short circuit withstand time cannot exceed 10μs under specified condition.

Diode, Inverter

Maximum Rated Values of Diode (T_C=25°C unless otherwise specified)

V _{RRM}	Repetitive Peak Reverse Voltage	T _J =25°C	1700	V
I _F	Diode Continuous Forward Current		300	A
I _{FM}	Diode Maximum Forward Current	t _p =1ms	600	A

Electrical Characteristics of Diode (T_C=25°C unless otherwise specified)

Symbol	Description	Conditions		Min.	Typ.	Max.	Units
V _{FM}	Forward Voltage	I _F =300A	T _J =25°C		1.89	2.30	V
			T _J =125°C		2.05		
			T _J =175°C		2.11		
t _{rr}	Reverse Recovery Time	I _F =300A, -diF/dt=6000A/μs(T _J =175°C), V _{CC} =900V, V _{GE} =-15V	T _J =25°C		626		ns
			T _J =125°C		1019		
			T _J =175°C		1411		
I _{rr}	Peak Reverse Recovery Current		T _J =25°C		440		A
			T _J =125°C		400		
			T _J =175°C		376		
Q _{rr}	Reverse Recovery Charge		T _J =25°C		74		μC
			T _J =125°C		100		
			T _J =175°C		118		

GT300HF170T2VH

IGBT Module Datasheet



E _{rec}	Reverse Recovery Energy	I _F =300A, -diF/dt=6000A/μs(T _J =175°C), V _{CC} =900V, V _{GE} =-15V	T _J =25°C		38		mJ
			T _J =125°C		54		
			T _J =175°C		66		
R _{θJC}	Diode Thermal Resistance: Junction-to-Case (per Diode)					0.129	°C/W
R _{θCS}	Diode Thermal Resistance: Case-to-Sink (per Diode, λ _{grease} = 1 W/(m • K))				0.093		°C/W

Module

Symbol	Description	Conditions	Min.	Typ.	Max.	Units
V_{iso}	Isolation Voltage (All Terminals Shorted)	RMS, $f=50Hz$, 60s	3400			V
T_J	Maximum Junction Temperature		-40		175	$^\circ C$
T_{JOP}	Maximum Operating Junction Temperature Range ^{note2}		-40		175	$^\circ C$
T_{stg}	Storage Temperature		-40		125	$^\circ C$
CTI	Comparative Tracking Index		200			
M	Power Terminals Screw:M6		3.0		5.0	N·m
M	Mounting Screw:M6		3.0		6.0	N·m
G	Weight			300		g

note2: $T_{JOP} > 150^\circ C$ is only allowed for operation at overload conditions.

Ordering Information Table

Device code

G	T	300	HF	170	T2V	H
①	②	③	④	⑤	⑥	⑦

- ① - IGBT Module
- ② - Trench, Low Switching Losses IGBT
- ③ - Rated Current (300=300A)
- ④ - Circuit Configuration: HF (Half Bridge)
- ⑤ - Rated Voltage (170=1700V)
- ⑥ - Package Type
- ⑦ - Test Level (Pass the Important Reliability Test-Industrial Grade)

GT300HF170T2VH

IGBT Module Datasheet



Characteristic diagram

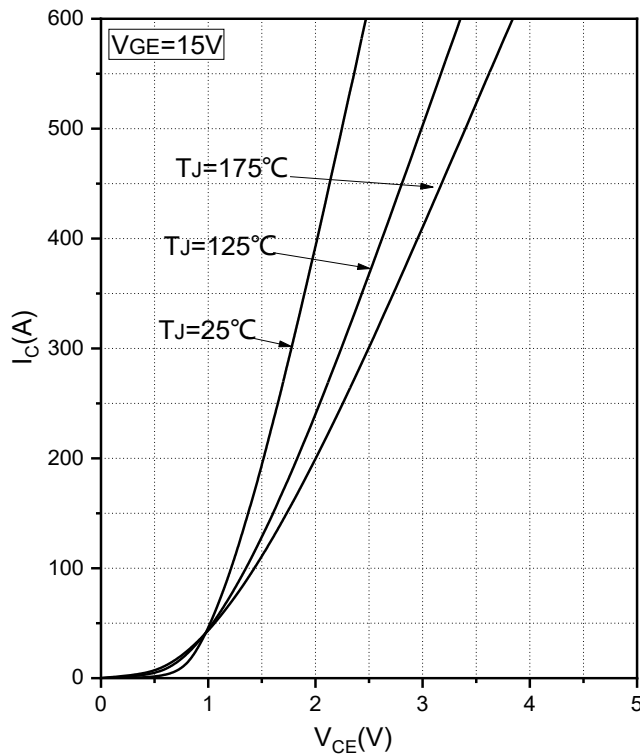


Fig.1 Typical Saturation Voltage Characteristics

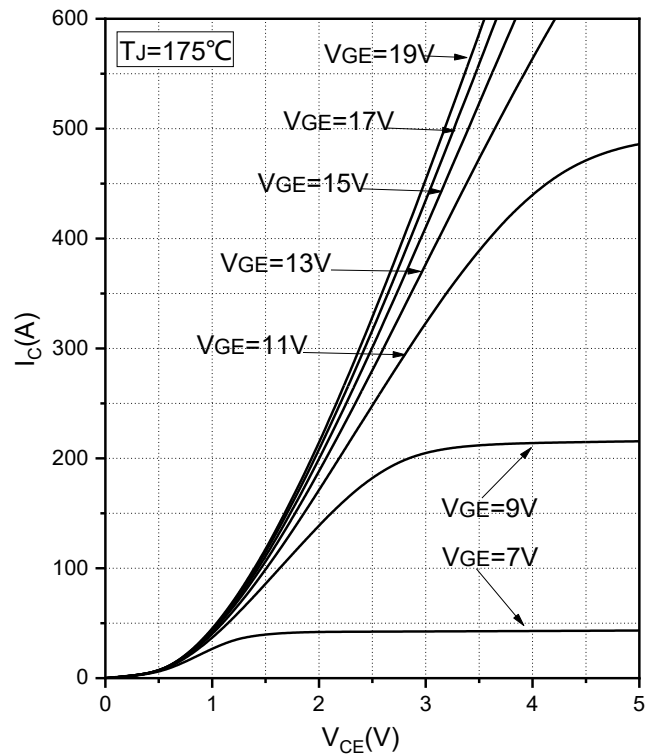


Fig.2 Typical Output Characteristics

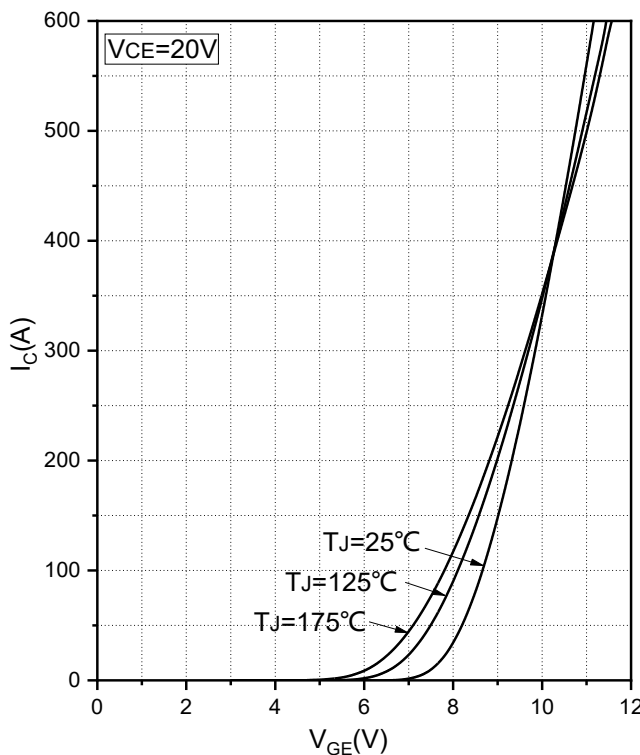


Fig.3 Transfer Characteristic

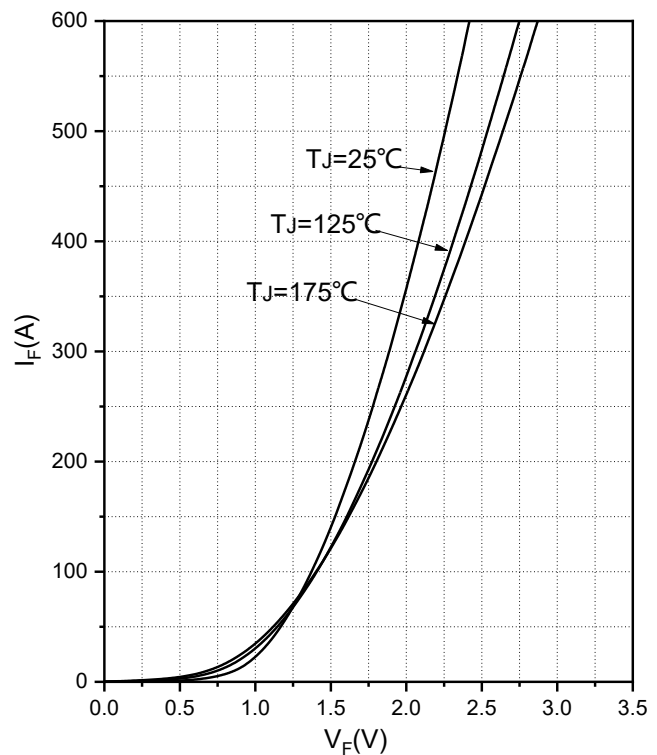


Fig.4 Forward Characteristics of Diode

GT300HF170T2VH

IGBT Module Datasheet

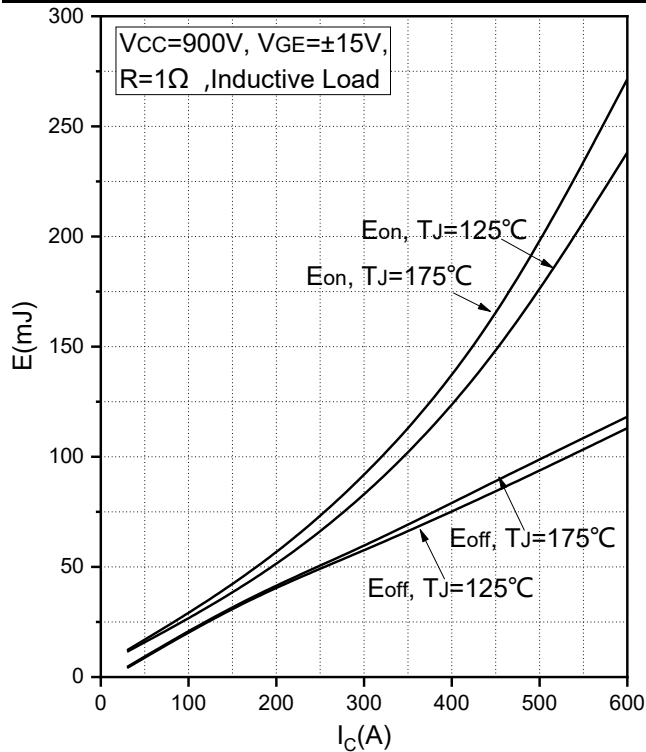


Fig.5 Typical Switching Loss IGBT vs. Collector Current

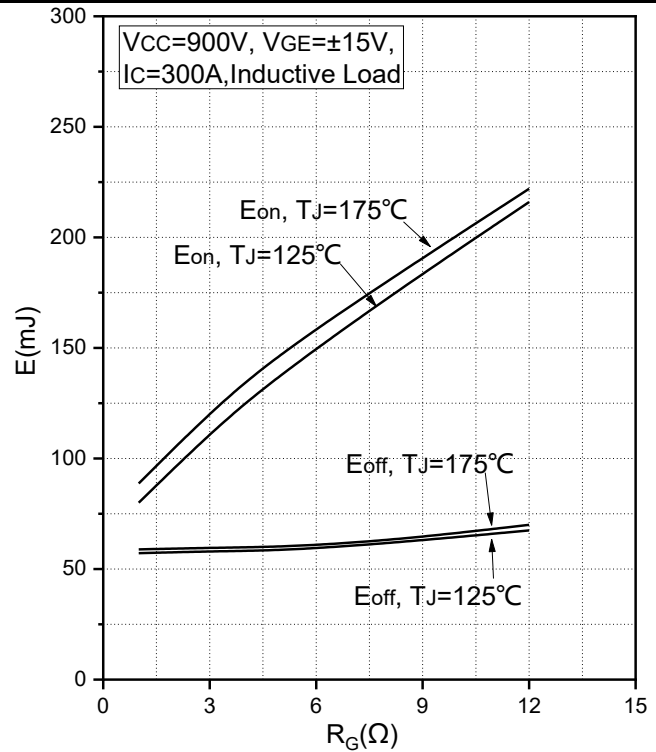


Fig.6 Typical Switching Loss IGBT vs. Gate Resistance

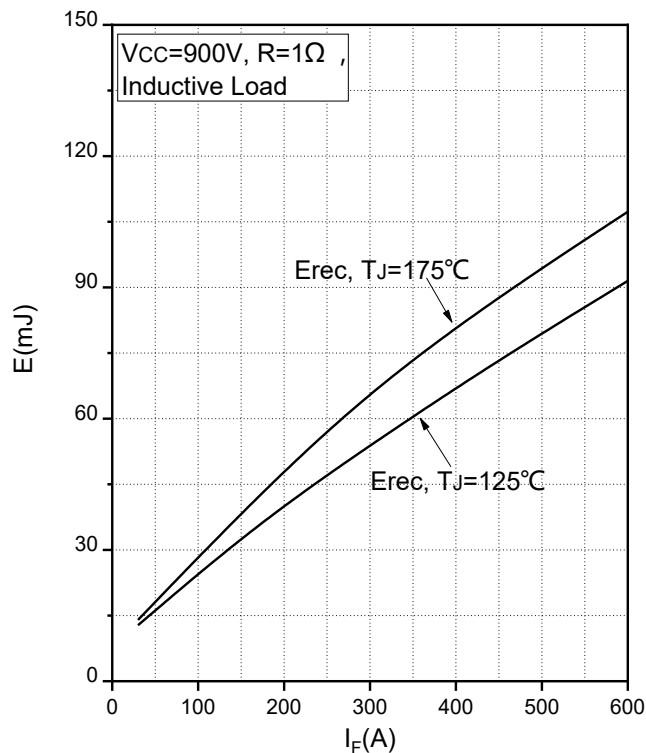


Fig.7 Typical Switching Loss Diode vs. Forward Current

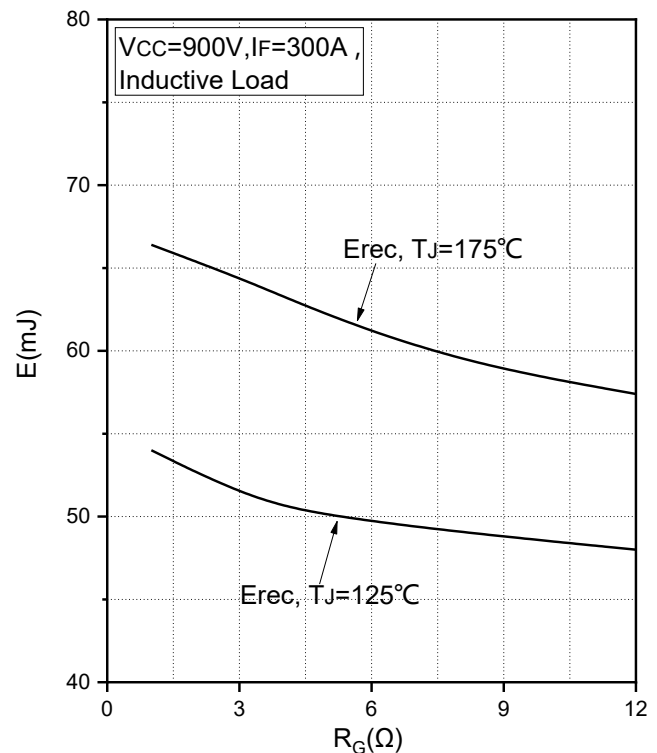


Fig.8 Typical Switching Loss Diode vs. Gate Resistance

GT300HF170T2VH

IGBT Module Datasheet

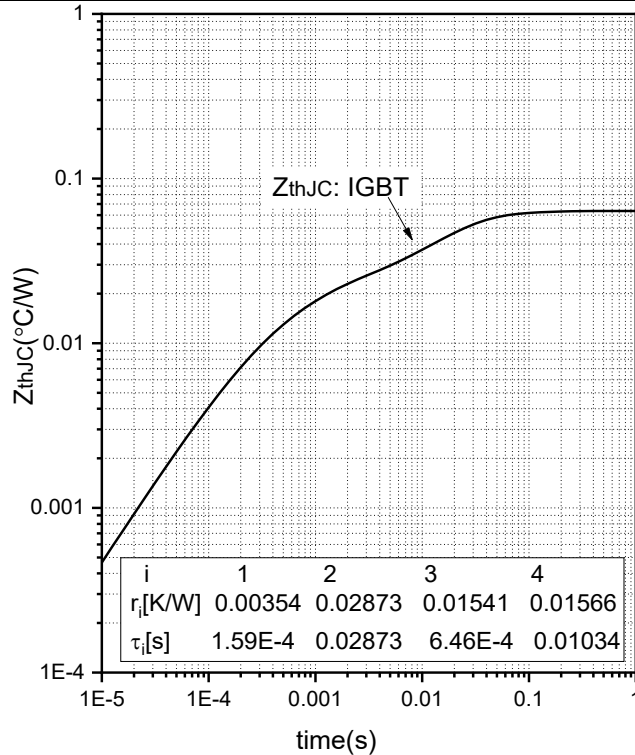


Fig.9 Transient Thermal Impedance (IGBT)

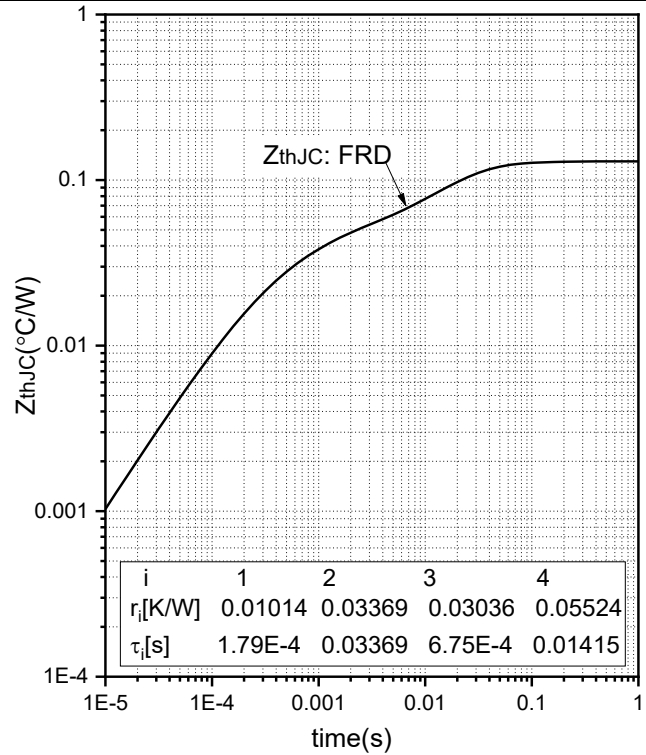


Fig.10 Transient Thermal Impedance (Diode)

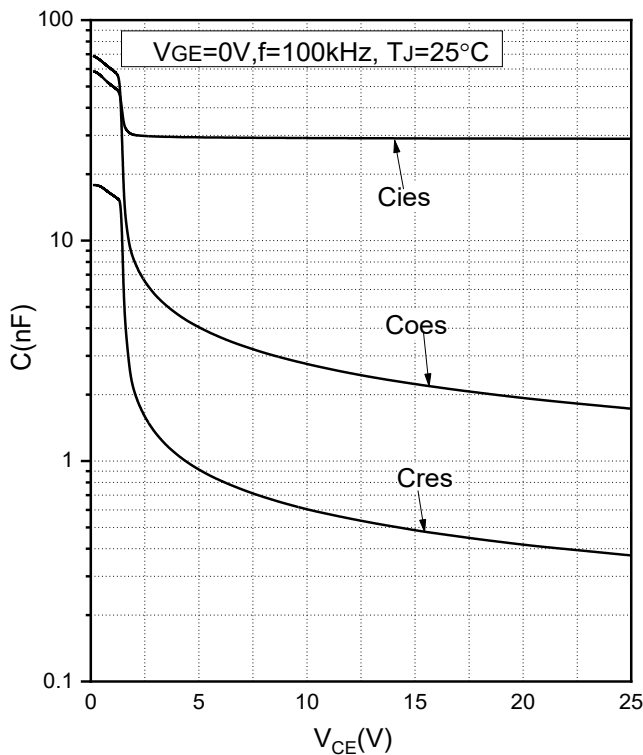


Fig.11 Capacitance Characteristics

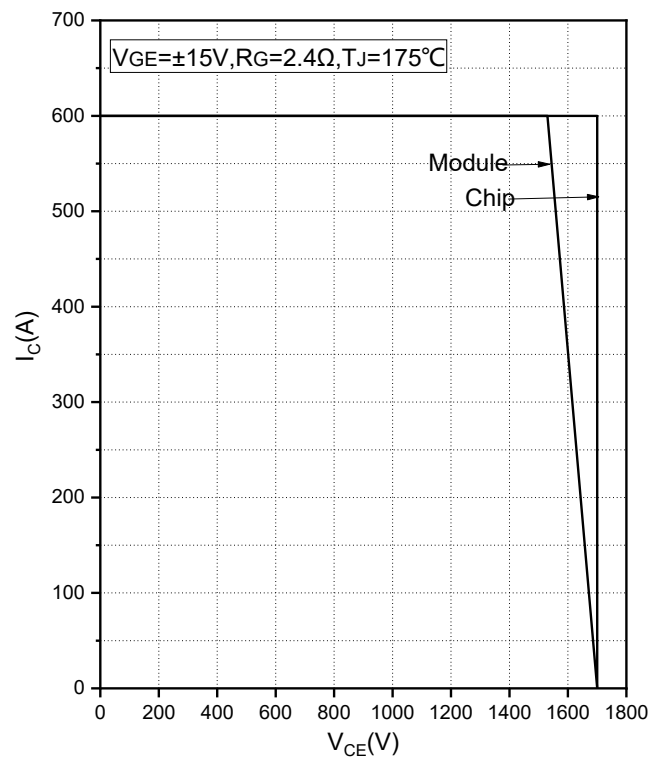


Fig.12 Reverse Bias Safe Operation Area (RBSOA)

GT300HF170T2VH

IGBT Module Datasheet


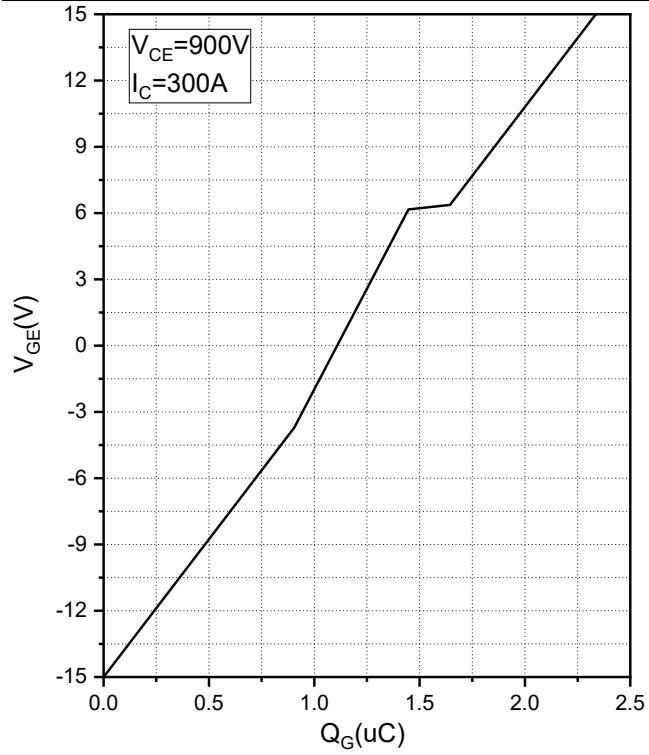


Fig.13 Gate Charge Characteristics


GT300HF170T2VH

IGBT Module Datasheet



Internal Circuit:

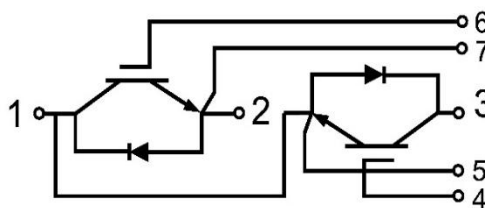

Package Outline (Unit: mm):

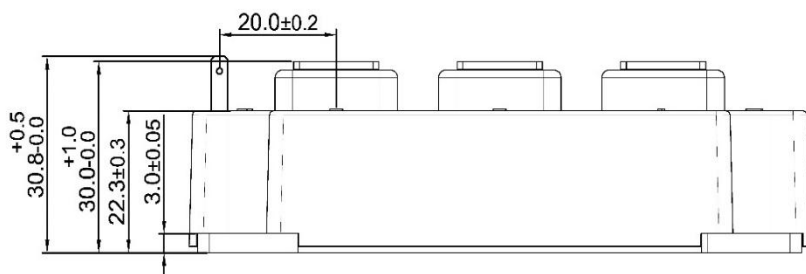

View A
scale 3:1

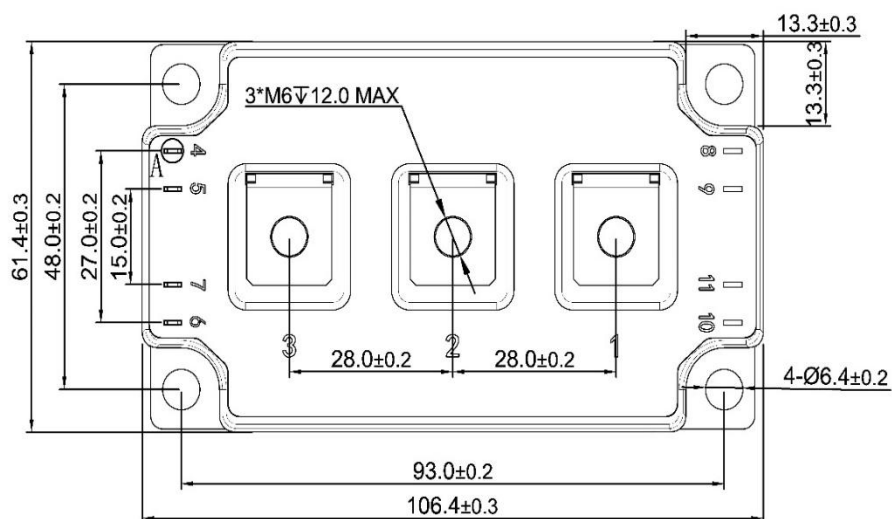

GT300HF170T2VH

IGBT Module Datasheet



Revision	Notes
01	Preliminary Datasheet
02	Engineering Sample Datasheet

Announcement

Information in this document is believed to be accurate and reliable. However, NJSME does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to Make Changes

NJSME reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

The datasheet with “REV.” + “Arabic numerals” is based on engineering data for initial reference purpose only.

The released datasheet would be issued with “REV.” + “alphabet characters”.