




RD200FF180C3H

Rectifier Module

Features:

- Blocking Voltage:1800V
- Heat Transfer Through Aluminum Oxide DBC Ceramic Isolated Metal Baseplate
- Glass Passivated Chip
- Three Phase Bridge Rectifier

Circuit Diagram



Applications:

- Three Phase Rectifiers for Power Supplies
- Rectifiers for DC Motor Field Supplies
- Battery Charger Rectifiers
- Input Rectifiers for Variable Frequency Drives

Maximum Rated

Symbol	Description	Conditions	Min.	Typ.	Max.	Units
V_{RRM}	Repetitive Peak Reverse Voltage	$T_{VJ}=25^{\circ}\text{C}$	1800			V
I_D	Average Forward Current	Three Phase, Full Wave, $T_c=100^{\circ}\text{C}$			200	A
I_{FSM}	Surge Current @ $t_p=10$ ms	$t_p=10\text{ms}$, $T_{VJ}=25^{\circ}\text{C}$			2000	A
i^2t	I^2t - Value	$t_p=10\text{ms}$, $T_{VJ}=25^{\circ}\text{C}$			20000	A^2s
V_{iso}	Isolation Voltage(All Terminals Shorted)	AC 50Hz;r.m.s.;1s	3600			V
T_{VJ}	Maximum Operating Junction Temperature Range		-40		150	$^{\circ}\text{C}$
T_{stg}	Storage Temperature		-40		125	$^{\circ}\text{C}$
T	Power Terminals Screw:M6		4.0		6.0	Nm
T	Mounting Screw:M6		4.0		6.0	Nm
G	Weight			240		g



Thermal Characteristics

Symbol	Description	Min.	Typ.	Max.	Units
Rth(j-c)	Diode Thermal Resistance: Junction-to-Case			0.39	°C/W
Rth(c-s)	Case-to-Sink Thermally (Conductive Grease Applied)			0.04	°C/W

Electrical Characteristics

Symbol	Description	Conditions	Min.	Typ.	Max.	Units
V _F	Forward Voltage	I _F =200A, T _{VJ} =25°C		1.40	1.65	V
		I _F =200A, T _{VJ} =125°C			1.70	V
		I _F =200A, T _{VJ} =150°C			1.80	V
I _R	Reverse Current	V _{RD} =1800V, T _{VJ} =25°C			100	uA
		V _{RD} =1800V, T _{VJ} =125°C			2	mA
		V _{RD} =1800V, T _{VJ} =150°C			6	mA

Ordering Information Table

Device code

RD	200	FF	180	C3	H
①	②	③	④	⑤	⑥

- ① - Rectifier Module
- ② - Rated Current (200=200A)
- ③ - Circuit Configuration (Full Bridge)
- ④ - Rated Voltage (180=1800V)
- ⑤ - Package Type
- ⑥ - Test Level (Pass the Important Reliability Test-Industrial Grade)

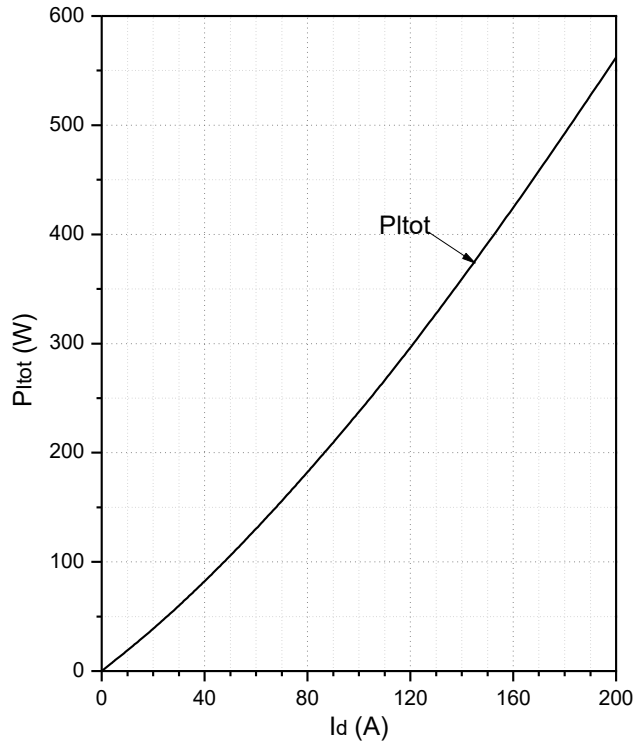


Fig.1 Power Dissipation

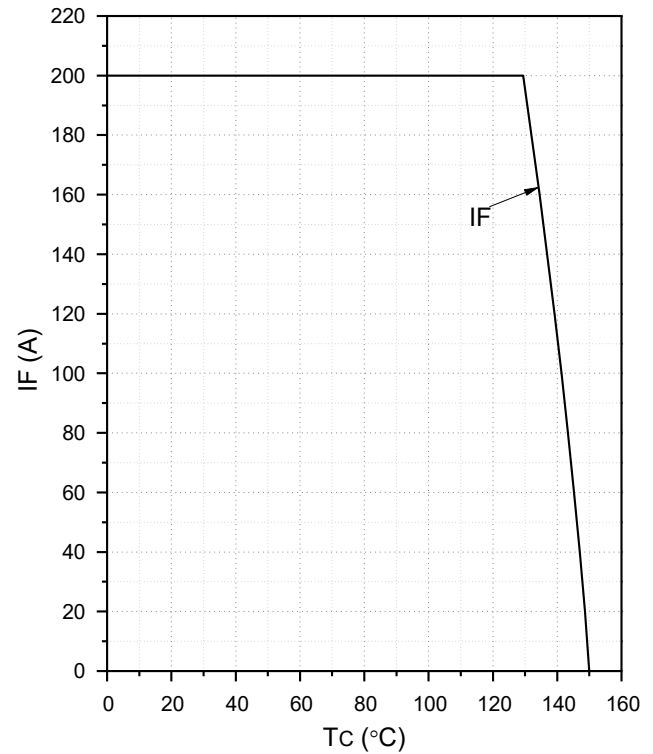


Fig.2 Forward Current Derating Curve

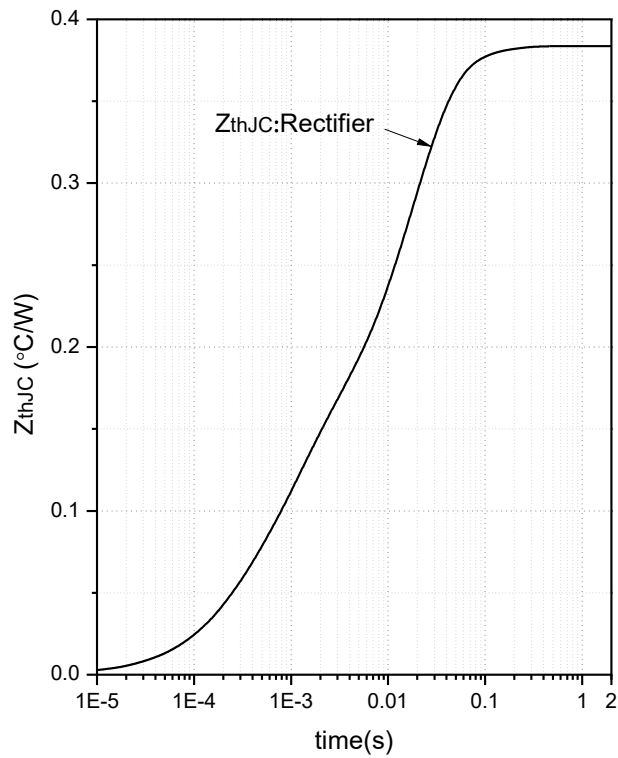


Fig.3 Transient Thermal Impedance

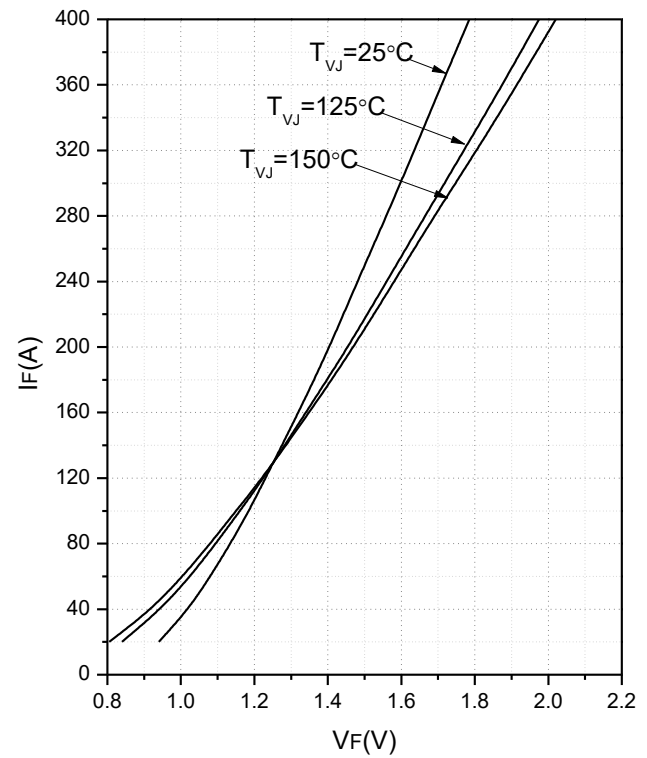


Fig.4 Forward Characteristics



Revision	Notes
01	Initial Release
A	Final Version
B	Update Electrical Property Parameter
C	Update Outline

Announcement

Information in this document is believed to be accurate and reliable. However, NJSME does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to Make Changes

NJSME reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

The datasheet with “REV.” + “Arabic numerals” is based on engineering data for initial reference purpose only.

The released datasheet would be issued with “REV.” + “alphabet characters”.