


DATASHEET

SID0340C120d23

d23 QLLC Diode, 9.19mm x 12.47mm

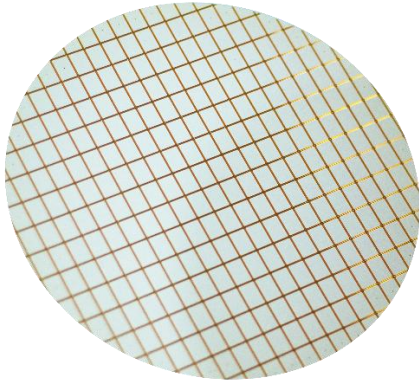

$V_{RRM} = 1200\text{ V}$

$I_F = 340\text{ A}$

- d23 quasi local lifetime control diode design
- neutral temperature coefficient
- easy paralleling

Maximum ratings¹

PARAMETER	SYMBOL	CONDITIONS	MIN	MAX	UNIT
Repetitive peak reverse voltage	V_{RRM}	$T_{vj} \geq 25\text{ °C}$		1200	V
Continuous forward current	I_F	$T_{vj} < 175\text{ °C}$		340	A
Maximum repetitive forward current	I_{FRM}	t_p limited by $T_{vj\text{ max}}$ $T_{vj\text{ max}}$		680	A
Junction temperature	T_{vj}		-40	175	°C
Junction operating temperature	$T_{vj(op)}$		-40	175	°C



Scan for latest version download

¹ Maximum rated values indicate limits beyond which damage to the device may occur per IEC 60747



Diode²

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Cathode-Anode breakdown voltage	$V_{(BR)}$	$I_R = 0.25\text{mA}$, $T_{vj} = 25^\circ\text{C}$	1200			V
Forward voltage drop	V_F	$I_F = 300\text{ A}$	$T_{vj} = 25^\circ\text{C}$	1.65		V
			$T_{vj} = 125^\circ\text{C}$	1.7		V
			$T_{vj} = 175^\circ\text{C}$	1.65		V
Reverse leakage current	I_R	$V_R = 1200\text{ V}$	$T_{vj} = 25^\circ\text{C}$		3	μA
Peak reverse recovery current	I_{RM}	$V_R = 600\text{ V}$, $I_F = 300\text{ A}$, $di/dt = 3900\text{ A}/\mu\text{s}$ (175°C), $R_G = 1.5\ \Omega$, $V_{GE} = \pm 15\text{ V}$, IGBT: SIS0300C120i23	$T_{vj} = 25^\circ\text{C}$	225		A
			$T_{vj} = 125^\circ\text{C}$	260		A
			$T_{vj} = 175^\circ\text{C}$	280		A
Recovery charge	Q_{rr}		$T_{vj} = 25^\circ\text{C}$	33		μC
			$T_{vj} = 125^\circ\text{C}$	57		μC
			$T_{vj} = 175^\circ\text{C}$	70		μC
Reverse recovery time	t_{rr}		$T_{vj} = 25^\circ\text{C}$	640		ns
			$T_{vj} = 125^\circ\text{C}$	760		ns
			$T_{vj} = 175^\circ\text{C}$	880		ns
Reverse recovery energy	E_{rec}		$T_{vj} = 25^\circ\text{C}$	14		mJ
			$T_{vj} = 125^\circ\text{C}$	23		mJ
			$T_{vj} = 175^\circ\text{C}$	28		mJ


² Characteristic values according to IEC 60747-2



Characteristics


Diode forward characteristic (typical)

$$I_F = f(V_F)$$

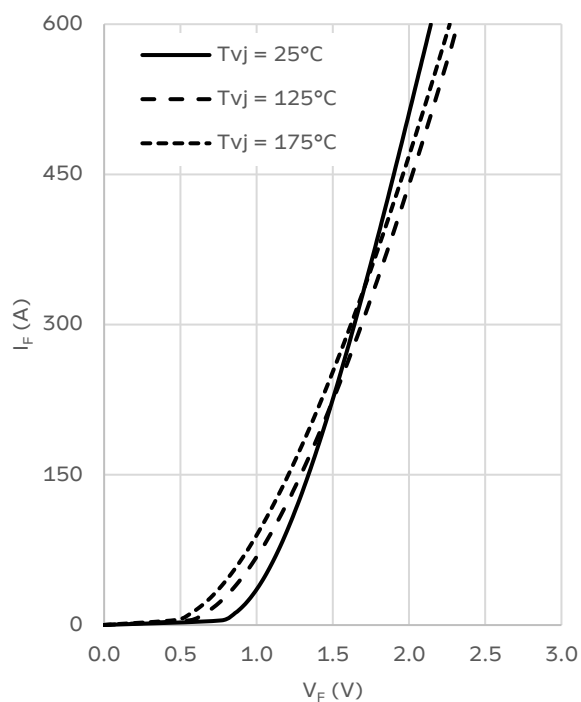

Diode SOA

$$T_{vj} \leq 175\text{ °C}$$

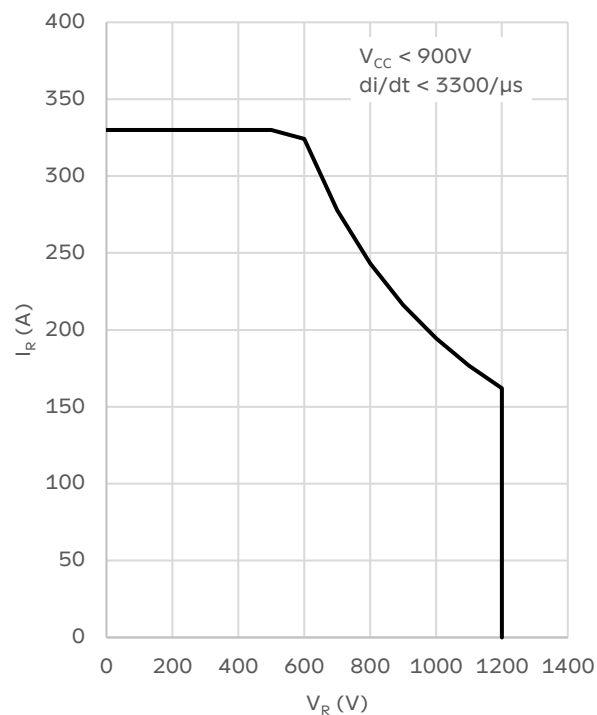


Mechanical properties

PARAMETER		UNIT
Die size	(9.19 ± 0.01) × (12.47 ± 0.01)	mm ²
Thickness	130 ± 5	μm
Wafer diameter	200	mm
Maximum chips per wafer	218	pcs
Frontside passivation	Polyimide	
Frontside metal	AlSiCu, 5000nm	
Backside metal	Al Ni Ag System, 1100nm	



Chip drawing

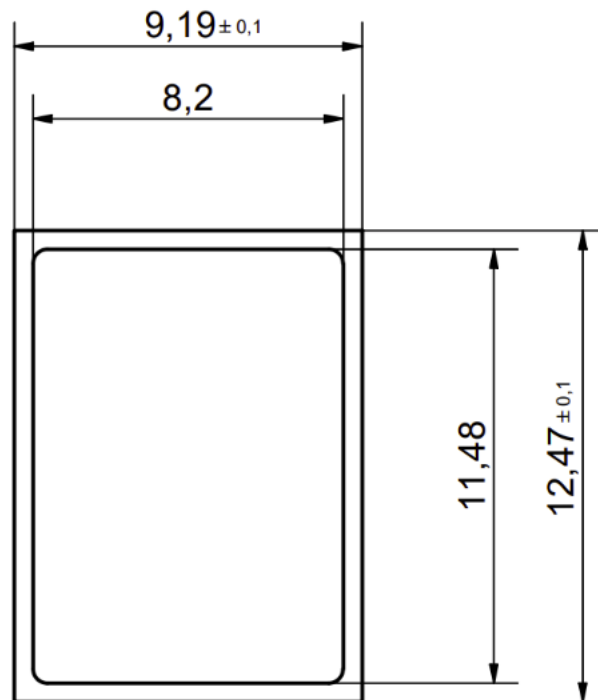

This is an electrostatic sensitive device.

Ordering Information

OPTION		ARTICLE NUMBER
Packaging Method	Sawn on tape (_O10)	SID0340C120D23_ O10
	Wafer unsawn (_O20)	SID0340C120D23_ O20
	Waffle pack (_O30)	SID0340C120D23_ O30