SKM 100GB125DN

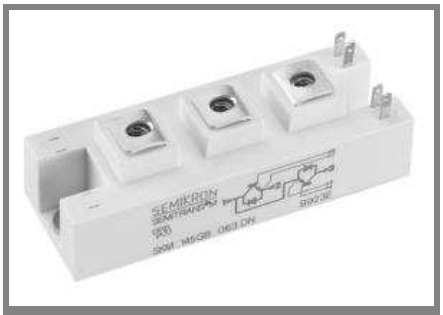

SEMITRANS® 2N

Ultra Fast IGBT Module

SKM 100GB125DN

Features

- N channel, homogeneous Si
- Low inductance case
- Short tail current with low temperature dependence
- High short circuit capability, self limiting to 6 x I_{cnom}
- Fast & soft inverse CAL diodes
- Isolated copper baseplate using DCB Direct Copper Bonding Technology
- Large clearance (10 mm) and creepage distances (20 mm)

Typical Applications*

- Switched mode power supplies at f_{sw} > 20 kHz
- Resonant inverters up to 100 kHz
- Inductive heating
- Electronic welders at f_{sw} > 20 kHz



GB

Absolute Maximum Ratings			T_c = 25 °C, unless otherwise specified	
Symbol	**Conditions**		**Values**	**Units**
IGBT				
V_{CES}	T_j = 25 °C		1200	V
I_C	T_j = 150 °C	T_{case} = 25 °C	100	A
		T_{case} = 85 °C	80	A
I_{CRM}	I_{CRM}=2xI_{Cnom}		150	A
V_{GES}			± 20	V
t_{psc}	V_{CC} = 600 V; $V_{GE} \leq$ 20 V; V_{CES} < 1200 V	T_j = 125 °C	10	µs
Inverse Diode				
I_F	T_j = 150 °C	T_{case} = 25 °C	95	A
		T_{case} = 80 °C	65	A
I_{FRM}	I_{FRM}=2xI_{Fnom}		150	A
I_{FSM}	t_p = 10 ms; sin.	T_j = 150 °C	720	A
Module				
$I_{t(RMS)}$			200	A
T_{vj}			- 40 ... + 150	°C
T_{stg}			125	°C
V_{isol}	AC, 1 min.		4000	V

Characteristics			T_c = 25 °C, unless otherwise specified			
Symbol	**Conditions**		**min.**	**typ.**	**max.**	**Units**
IGBT						
$V_{GE(th)}$	V_{GE} = V_{CE}, I_C = 2 mA		4,5	5,5	6,5	V
I_{CES}	V_{GE} = 0 V, V_{CE} = V_{CES}	T_j = 25 °C		0,15	0,45	mA
		T_j = 125 °C				mA
V_{CE0}		T_j = 25 °C				V
		T_j = 125 °C				V
r_{CE}	V_{GE} = 15 V	T_j = 25°C				mΩ
		T_j = 125°C				mΩ
$V_{CE(sat)}$	I_{Cnom} = 75 A, V_{GE} = 15 V	T_j = °$C_{chiplev.}$		3,3	3,85	V
C_{ies}	V_{CE} = 25, V_{GE} = 0 V	f = 1 MHz		5	6,6	nF
C_{oes}				0,72	0,9	nF
C_{res}				0,38	0,5	nF
Q_G	V_{GE} = 0 - +20V			650		nC
R_{Gint}	T_j = °C			5		Ω
$t_{d(on)}$	R_{Gon} = 8 Ω	V_{CC} = 600V		80		ns
t_r		I_C= 75A		40		ns
E_{on}		T_j = 125 °C		9		mJ
$t_{d(off)}$	R_{Goff} = 8 Ω	V_{GE} = ± 15V		360		ns
t_f				20		ns
E_{off}				3,5		mJ
$R_{th(j-c)}$	per IGBT				0,18	K/W

© by SEMIKRON

SKM 100GB125DN

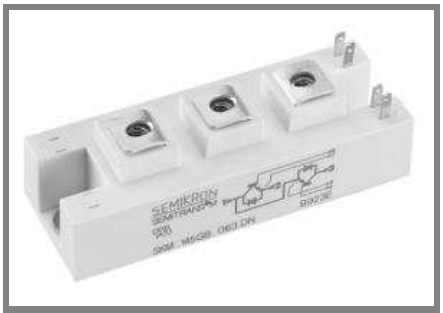

SEMITRANS® 2N

Ultra Fast IGBT Module

SKM 100GB125DN

Features

- N channel, homogeneous Si
- Low inductance case
- Short tail current with low temperature dependence
- High short circuit capability, self limiting to 6 x I_{cnom}
- Fast & soft inverse CAL diodes
- Isolated copper baseplate using DCB Direct Copper Bonding Technology
- Large clearance (10 mm) and creepage distances (20 mm)

Typical Applications*

- Switched mode power supplies at f_{sw} > 20 kHz
- Resonant inverters up to 100 kHz
- Inductive heating
- Electronic welders at f_{sw} > 20 kHz



GB

Characteristics						
Symbol	**Conditions**		**min.**	**typ.**	**max.**	**Units**
Inverse Diode						
$V_F = V_{EC}$	I_{Fnom} = 75 A; V_{GE} = 0 V	T_j = 25 °$C_{chiplev.}$		2	2,5	V
		T_j = 125 °$C_{chiplev.}$		1,8		V
V_{F0}		T_j = 25 °C		1,1	1,2	V
		T_j = 125 °C				V
r_F		T_j = 25 °C		12	17,3	mΩ
		T_j = 125 °C				mΩ
I_{RRM}	I_F = 75 A	T_j = 125 °C		50		A
Q_{rr}	di/dt = 800 A/µs			11,5		µC
E_{rr}	V_{GE} = 0 V; V_{CC} = 600 V			4		mJ
$R_{th(j-c)D}$	per diode				0,5	K/W
Module						
L_{CE}				20	25	nH
$R_{CC'+EE'}$	res., terminal-chip	T_{case}= 25 °C		0,75		mΩ
		T_{case}= 125 °C		1		mΩ
$R_{th(c-s)}$	per module				0,05	K/W
M_s	to heat sink M6		3		5	Nm
M_t	to terminals M5		2,5		5	Nm
w					160	g

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our staff.

 © by SEMIKRON

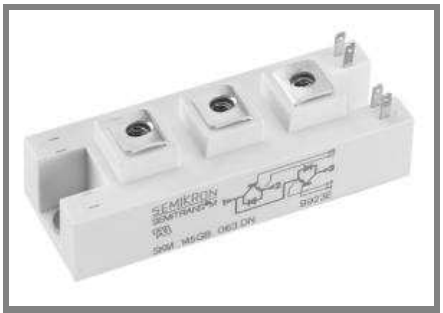

SEMITRANS® 2N

Ultra Fast IGBT Module

SKM 100GB125DN

Features

- N channel, homogeneous Si
- Low inductance case
- Short tail current with low temperature dependence
- High short circuit capability, self limiting to 6 x I_{cnom}
- Fast & soft inverse CAL diodes
- Isolated copper baseplate using DCB Direct Copper Bonding Technology
- Large clearance (10 mm) and creepage distances (20 mm)

Typical Applications*

- Switched mode power supplies at f_{sw} > 20 kHz
- Resonant inverters up to 100 kHz
- Inductive heating
- Electronic welders at f_{sw} > 20 kHz



GB

Z_{th} Symbol	Conditions	Values	Units
$Z_{th(j-c)I}$			
R_i	i = 1	95	mk/W
R_i	i = 2	65	mk/W
R_i	i = 3	17,5	mk/W
R_i	i = 4	2,5	mk/W
tau_i	i = 1	0,0327	s
tau_i	i = 2	0,008	s
tau_i	i = 3	0,0017	s
tau_i	i = 4	0,008	s
$Z_{th(j-c)D}$			
R_i	i = 1	300	mk/W
R_i	i = 2	160	mk/W
R_i	i = 3	36	mk/W
R_i	i = 4	4	mk/W
tau_i	i = 1	0,054	s
tau_i	i = 2	0,001	s
tau_i	i = 3	0,0015	s
tau_i	i = 4	0,1	s

 © by SEMIKRON

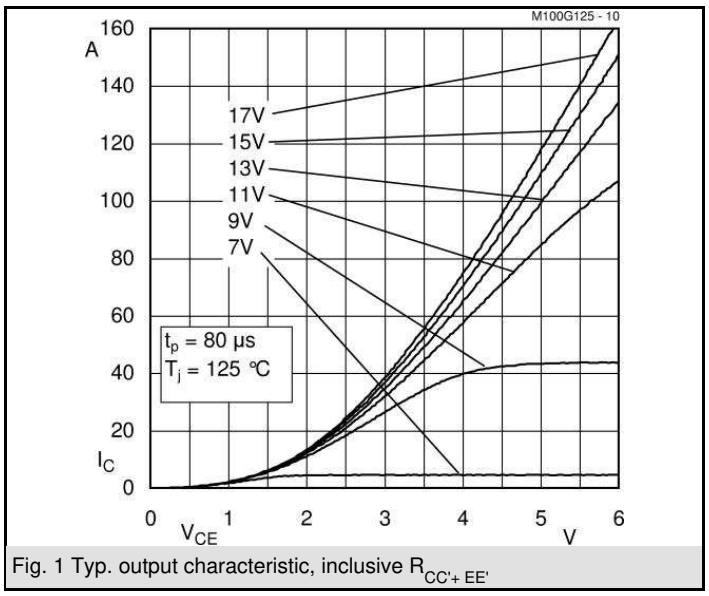

Fig. 1 Typ. output characteristic, inclusive $R_{CC'+EE'}$

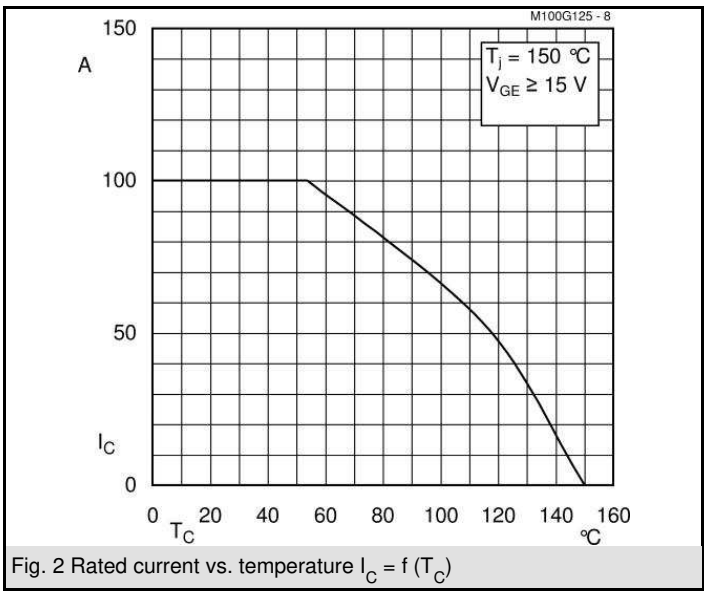

Fig. 2 Rated current vs. temperature $I_C = f(T_C)$

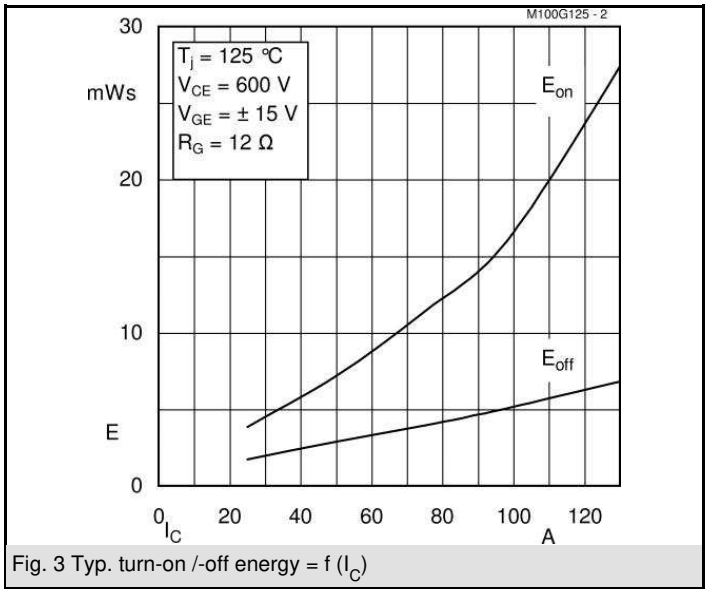

Fig. 3 Typ. turn-on /-off energy = f (I_C)

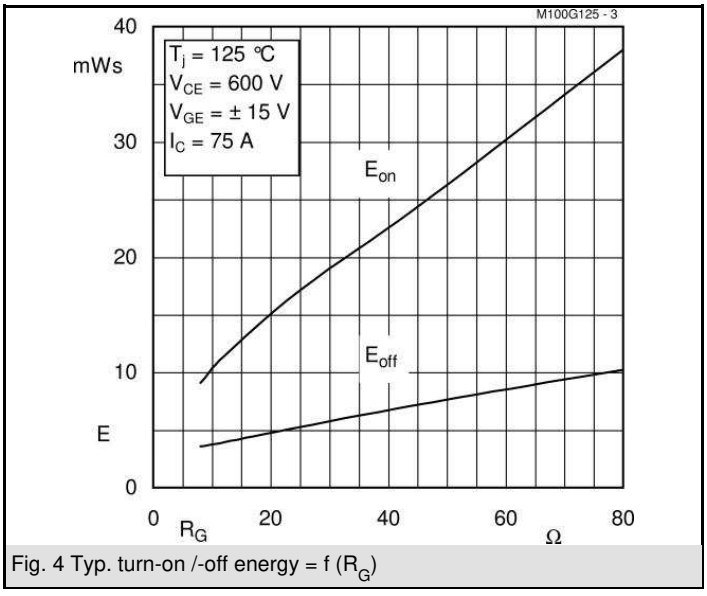

Fig. 4 Typ. turn-on /-off energy = f (R_G)

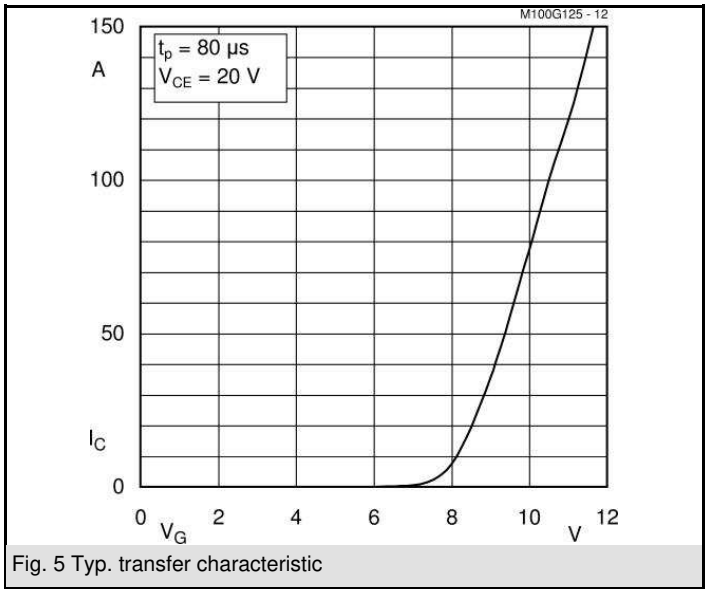

Fig. 5 Typ. transfer characteristic

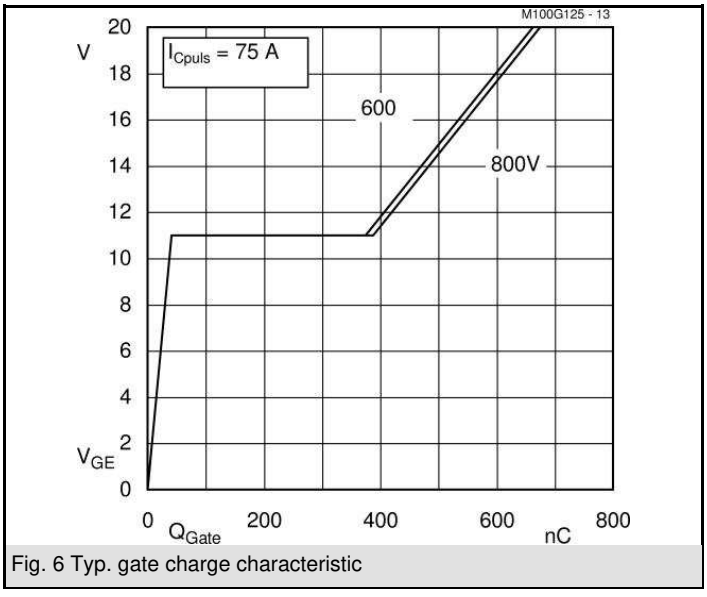

Fig. 6 Typ. gate charge characteristic

 © by SEMIKRON

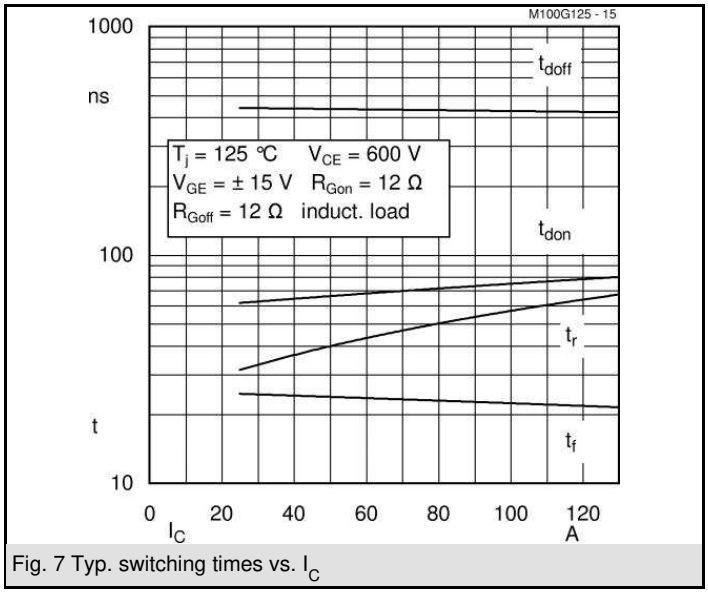

Fig. 7 Typ. switching times vs. I_C

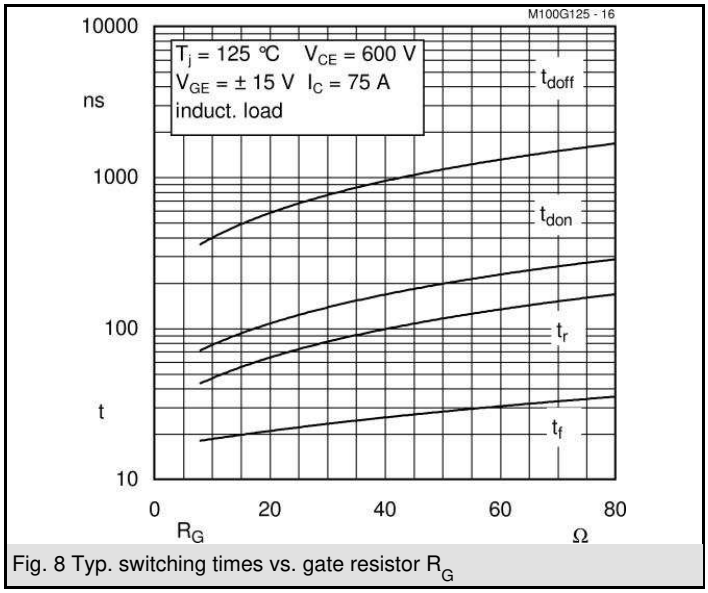

Fig. 8 Typ. switching times vs. gate resistor R_G

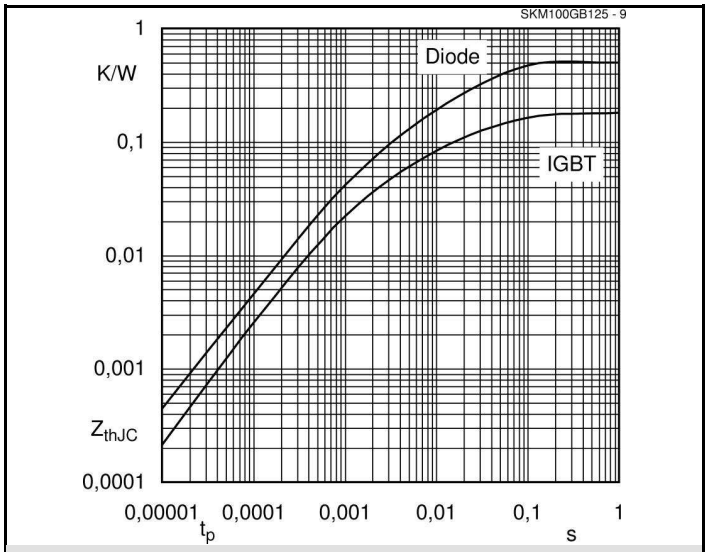

Fig. 9 Transient thermal impedance

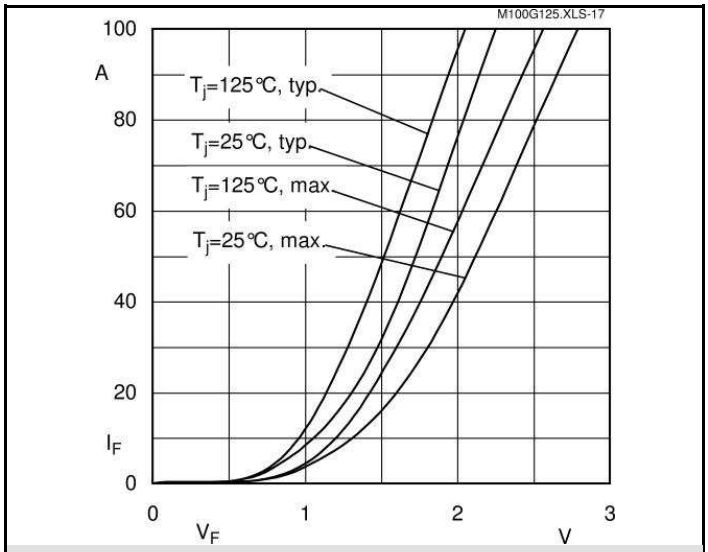

Fig. 10 CAL diode forward characteristic

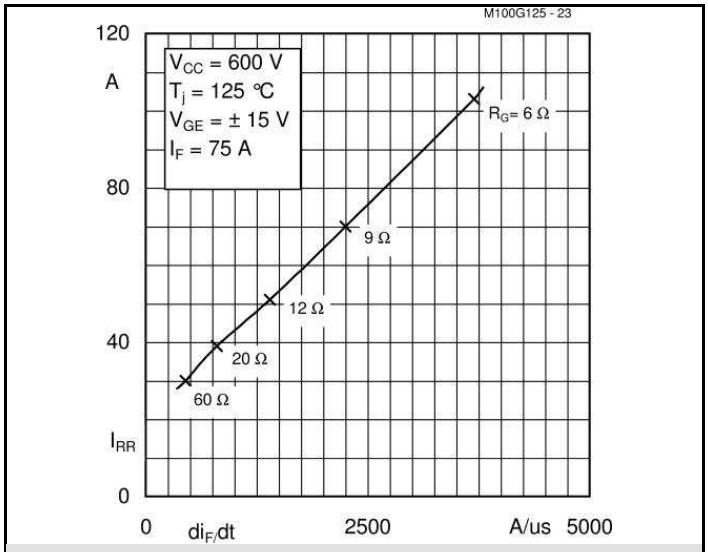

Fig. 11 Typ. CAL diode peak reverse recovery current

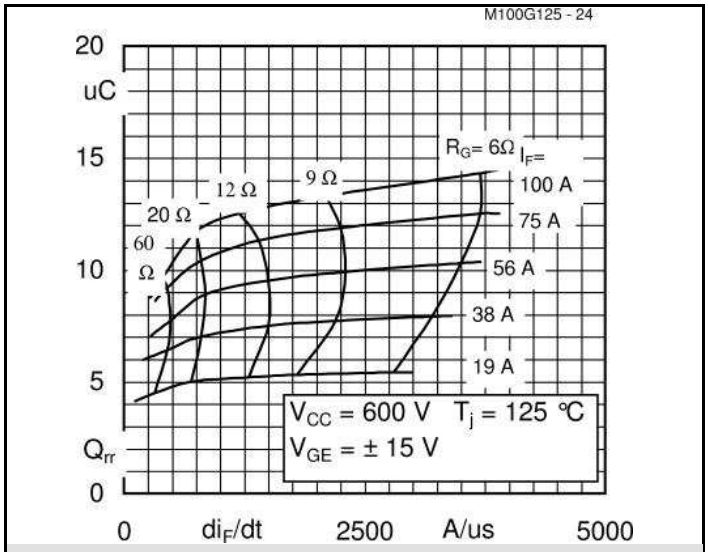

Fig. 12 Typ. CAL diode peak reverse recovery charge

 © by SEMIKRON

UL Recognized File 63 532

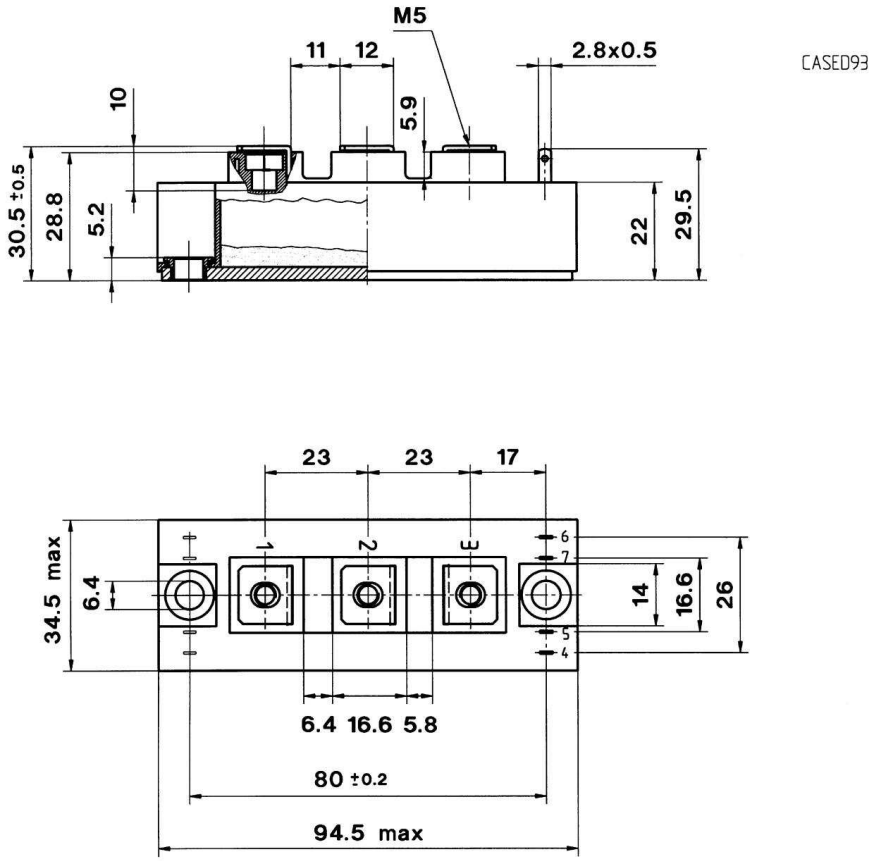

Case D 93

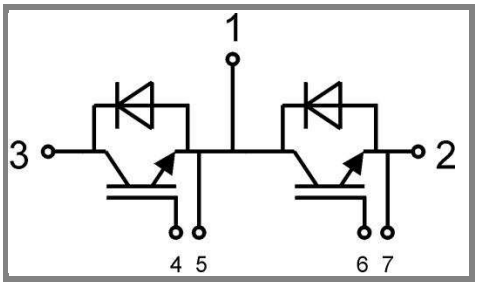

GB Case D 93

 © by SEMIKRON