SKM50GAL12T4



SEMITRANS® 2

Fast IGBT4 Modules

SKM50GAL12T4

Features

- IGBT4 = 4. generation fast trench IGBT (Infineon)
- CAL4 = Soft switching 4. generation CAL-diode
- Isolated copper baseplate using DBC technology (Direct Bonded Copper)
- Increased power cycling capability
- With integrated gate resistor
- For higher switching frequenzies up to 20kHz
- UL recognized, file no. E63532

Typical Applications*

- Electronic welders at fsw up to 20 kHz
- DC/DC – converter
- Brake chopper
- Switched reluctance motor

Remarks

- Case temperature limited to T_c = 125°C max.
- Recommended T_{op} = -40 ... +150°C
- Product reliability results valid for T_j = 150°C



GAL

Absolute Maximum Ratings

Symbol	Conditions		Values	Unit
IGBT				
V_{CES}	T_j = 25 °C		1200	V
I_C	T_j = 175 °C	T_c = 25 °C	81	A
		T_c = 80 °C	62	A
I_{Cnom}			50	A
I_{CRM}	I_{CRM} = 3xI_{Cnom}		150	A
V_{GES}			-20 ... 20	V
t_{psc}	V_{CC} = 800 V V_{GE} ≤ 15 V V_{CES} ≤ 1200 V	T_j = 150 °C	10	µs
T_j			-40 ... 175	°C
Inverse diode				
I_F	T_j = 175 °C	T_c = 25 °C	65	A
		T_c = 80 °C	49	A
I_{Fnom}			50	A
I_{FRM}	I_{FRM} = 3xI_{Fnom}		150	A
I_{FSM}	t_p = 10 ms, sin 180°, T_j = 25 °C		270	A
T_j			-40 ... 175	°C
Freewheeling diode				
I_F	T_j = 175 °C	T_c = 25 °C	65	A
		T_c = 80 °C	49	A
I_{Fnom}			50	A
I_{FRM}	I_{FRM} = 3xI_{Fnom}		150	A
I_{FSM}	t_p = 10 ms, sin 180°, T_j = 25 °C		270	A
T_j			-40 ... 175	°C
Module				
$I_{t(RMS)}$	$T_{terminal}$ = 80 °C		200	A
T_{stg}			-40 ... 125	°C
V_{isol}	AC sinus 50 Hz, t = 1 min		4000	V

Characteristics

Symbol	Conditions		min.	typ.	max.	Unit
IGBT						
$V_{CE(sat)}$	I_C = 50 A V_{GE} = 15 V chiplevel	T_j = 25 °C		1.85	2.10	V
		T_j = 150 °C		2.20	2.40	V
V_{CE0}	chiplevel	T_j = 25 °C		0.8	0.9	V
		T_j = 150 °C		0.7	0.8	V
r_{CE}	V_{GE} = 15 V chiplevel	T_j = 25 °C		21.00	24.00	mΩ
		T_j = 150 °C		30.00	32.00	mΩ
$V_{GE(th)}$	V_{GE}=V_{CE}, I_C = 1.7 mA		5	5.8	6.5	V
I_{CES}	V_{GE} = 0 V V_{CE} = 1200 V	T_j = 25 °C			1	mA
		T_j = 150 °C				mA
C_{ies}	V_{CE} = 25 V V_{GE} = 0 V	f = 1 MHz		2.77		nF
C_{oes}		f = 1 MHz		0.20		nF
C_{res}		f = 1 MHz		0.16		nF
Q_G	V_{GE} = - 8 V...+ 15 V			280		nC
R_{Gint}	T_j = 25 °C			4.0		Ω

SKM50GAL12T4



SEMITRANS® 2

Fast IGBT4 Modules

SKM50GAL12T4

Features

- IGBT4 = 4. generation fast trench IGBT (Infineon)
- CAL4 = Soft switching 4. generation CAL-diode
- Isolated copper baseplate using DBC technology (Direct Bonded Copper)
- Increased power cycling capability
- With integrated gate resistor
- For higher switching frequenzies up to 20kHz
- UL recognized, file no. E63532

Typical Applications*

- Electronic welders at fsw up to 20 kHz
- DC/DC – converter
- Brake chopper
- Switched reluctance motor

Remarks

- Case temperature limited to T_c = 125°C max.
- Recommended T_{op} = -40 ... +150°C
- Product reliability results valid for T_j = 150°C

Characteristics

Symbol	Conditions		min.	typ.	max.	Unit
$t_{d(on)}$	V_{CC} = 600 V I_C = 50 A V_{GE} = ±15 V $R_{G\ on}$ = 8.2 Ω $R_{G\ off}$ = 8.2 Ω di/dt_{on} = 1700 A/µs di/dt_{off} = 670 A/µs	T_j = 150 °C		98		ns
t_r		T_j = 150 °C		29		ns
E_{on}		T_j = 150 °C		5.5		mJ
$t_{d(off)}$		T_j = 150 °C		325		ns
t_f		T_j = 150 °C		75		ns
E_{off}		T_j = 150 °C		4.5		mJ
$R_{th(j-c)}$	per IGBT				0.53	K/W
Inverse diode						
$V_F = V_{EC}$	I_F = 50 A V_{GE} = 0 V chiplevel	T_j = 25 °C		2.22	2.54	V
		T_j = 150 °C		2.18	2.50	V
V_{F0}	chiplevel	T_j = 25 °C		1.3	1.5	V
		T_j = 150 °C		0.9	1.1	V
r_F	chiplevel	T_j = 25 °C		18.4	20.8	mΩ
		T_j = 150 °C		25.6	28.0	mΩ
I_{RRM}	I_F = 50 A di/dt_{off} = 1380 A/µs V_{GE} = ±15 V V_{CC} = 600 V	T_j = 150 °C		35		A
Q_{rr}		T_j = 150 °C		8.7		µC
E_{rr}		T_j = 150 °C		3.6		mJ
$R_{th(j-c)}$	per diode				0.84	K/W
Freewheeling diode						
$V_F = V_{EC}$	I_F = 50 A V_{GE} = 0 V chiplevel	T_j = 25 °C		2.22	2.54	V
		T_j = 150 °C		2.18	2.50	V
V_{F0}	chiplevel	T_j = 25 °C		1.3	1.5	V
		T_j = 150 °C		0.9	1.1	V
r_F	chiplevel	T_j = 25 °C		18.4	20.8	mΩ
		T_j = 150 °C		25.6	28.0	mΩ
I_{RRM}	I_F = 50 A di/dt_{off} = 1380 A/µs V_{GE} = ±15 V V_{CC} = 600 V	T_j = 150 °C		35		A
Q_{rr}		T_j = 150 °C		8.7		µC
E_{rr}		T_j = 150 °C		3.6		mJ
$R_{th(j-c)}$	per Diode				0.84	K/W
Module						
L_{CE}					30	nH
$R_{CC'+EE'}$	terminal-chip	T_C = 25 °C		0.65		mΩ
		T_C = 125 °C		1		mΩ
$R_{th(c-s)}$	per module			0.04	0.05	K/W
M_s	to heat sink M6		3		5	Nm
M_t		to terminals M5	2.5		5	Nm
						Nm
w					160	g



GAL

 © by SEMIKRON

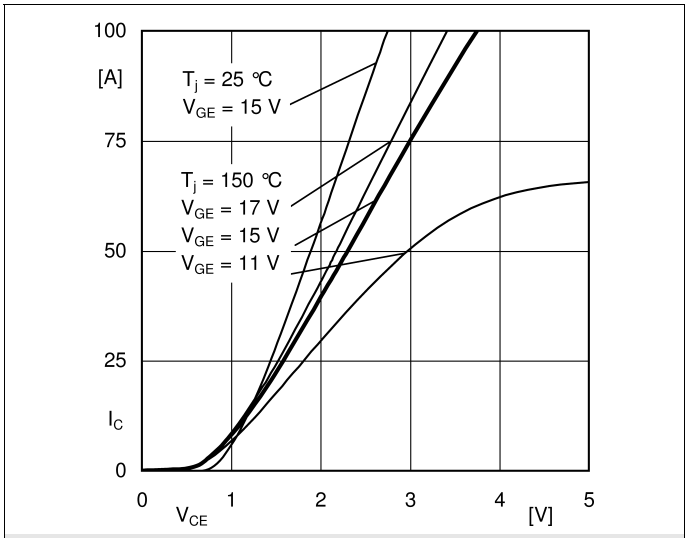

Fig. 1: Typ. output characteristic, inclusive $R_{CC'+EE'}$

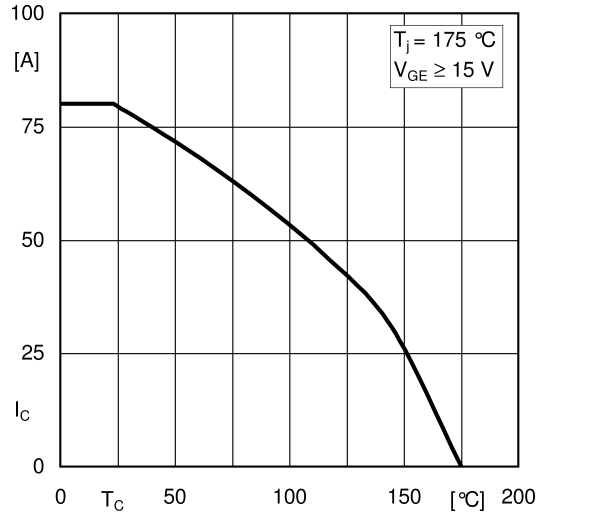

Fig. 2: Rated current vs. temperature $I_C = f(T_C)$

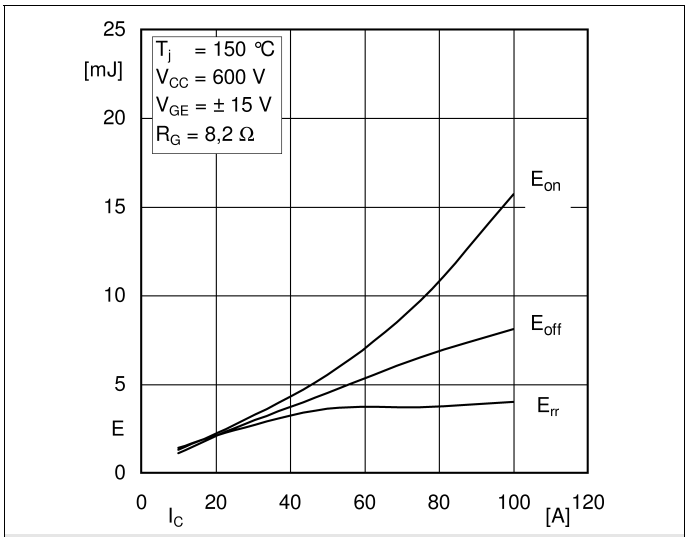

Fig. 3: Typ. turn-on /-off energy = f (I_C)

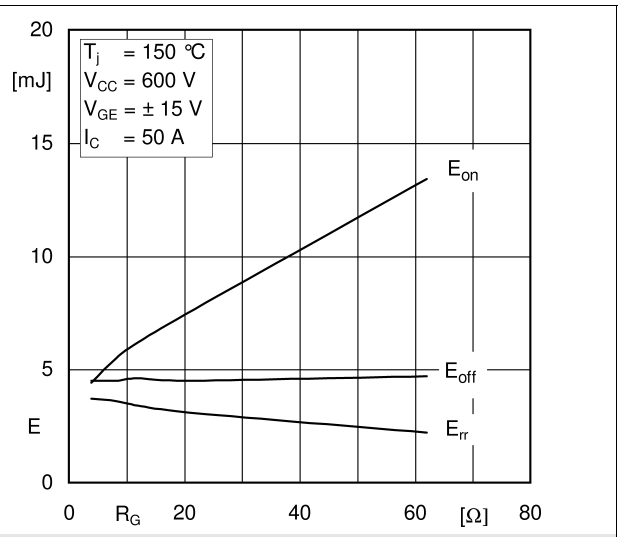

Fig. 4: Typ. turn-on /-off energy = f (R_G)

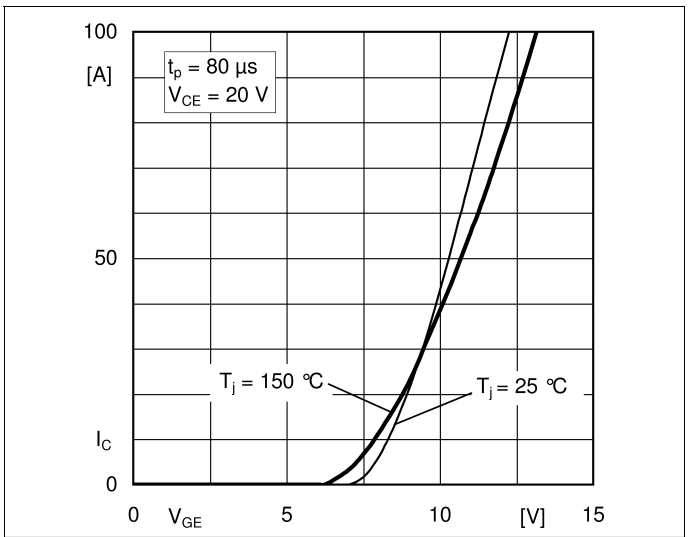

Fig. 5: Typ. transfer characteristic

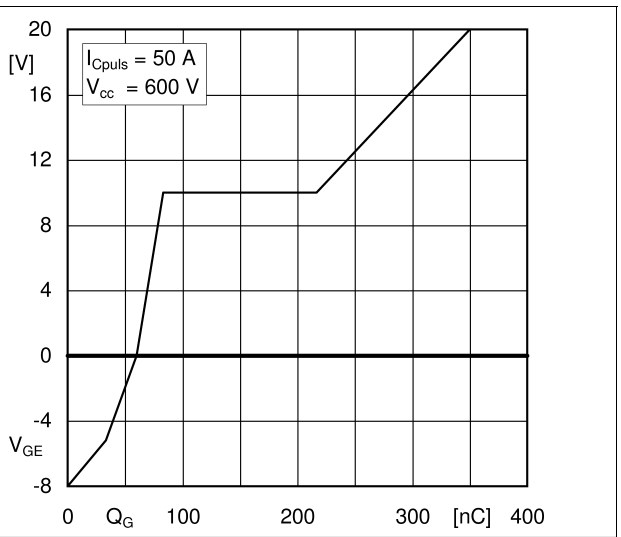

Fig. 6: Typ. gate charge characteristic

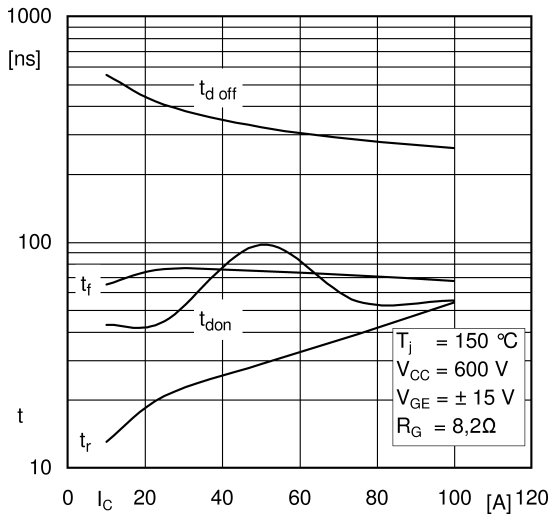

Fig. 7: Typ. switching times vs. I_C

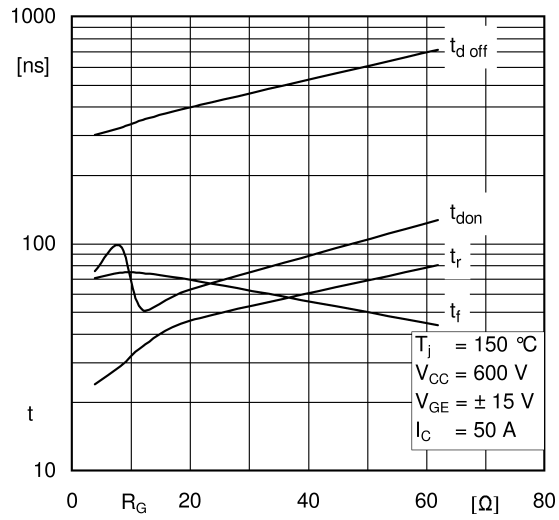

Fig. 8: Typ. switching times vs. gate resistor R_G

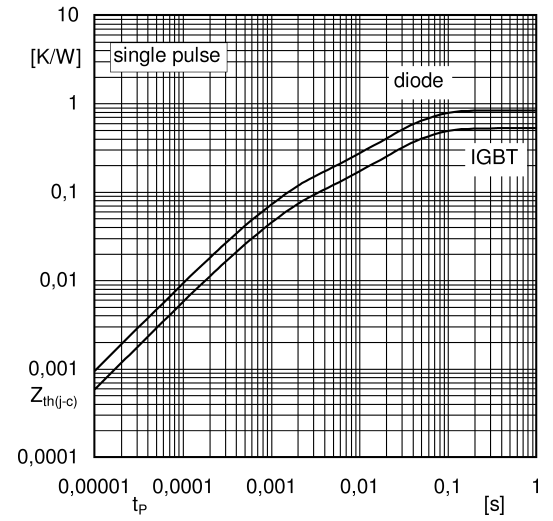

Fig. 9: Transient thermal impedance

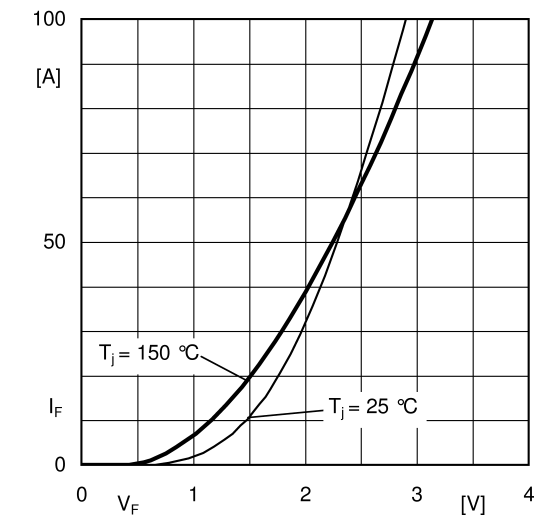

Fig. 10: Typ. CAL diode forward charact., incl. $R_{CC'+EE'}$

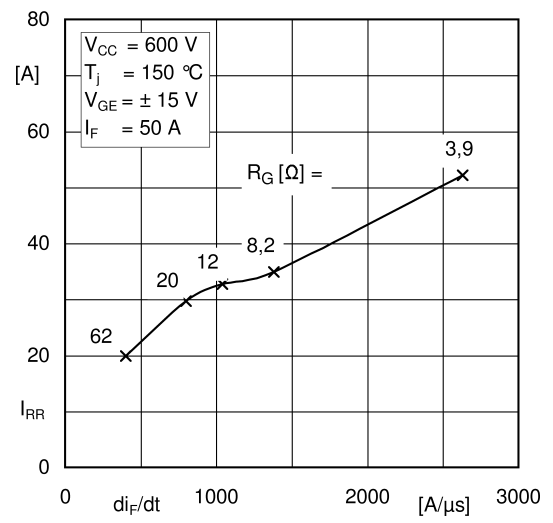

Fig. 11: CAL diode peak reverse recovery current

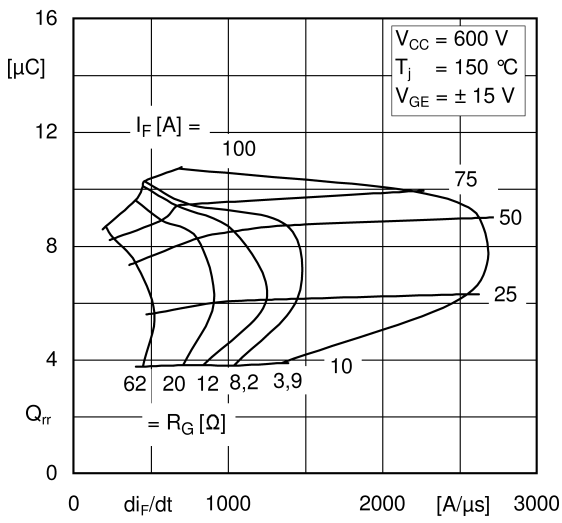

Fig. 12: Typ. CAL diode peak reverse recovery charge

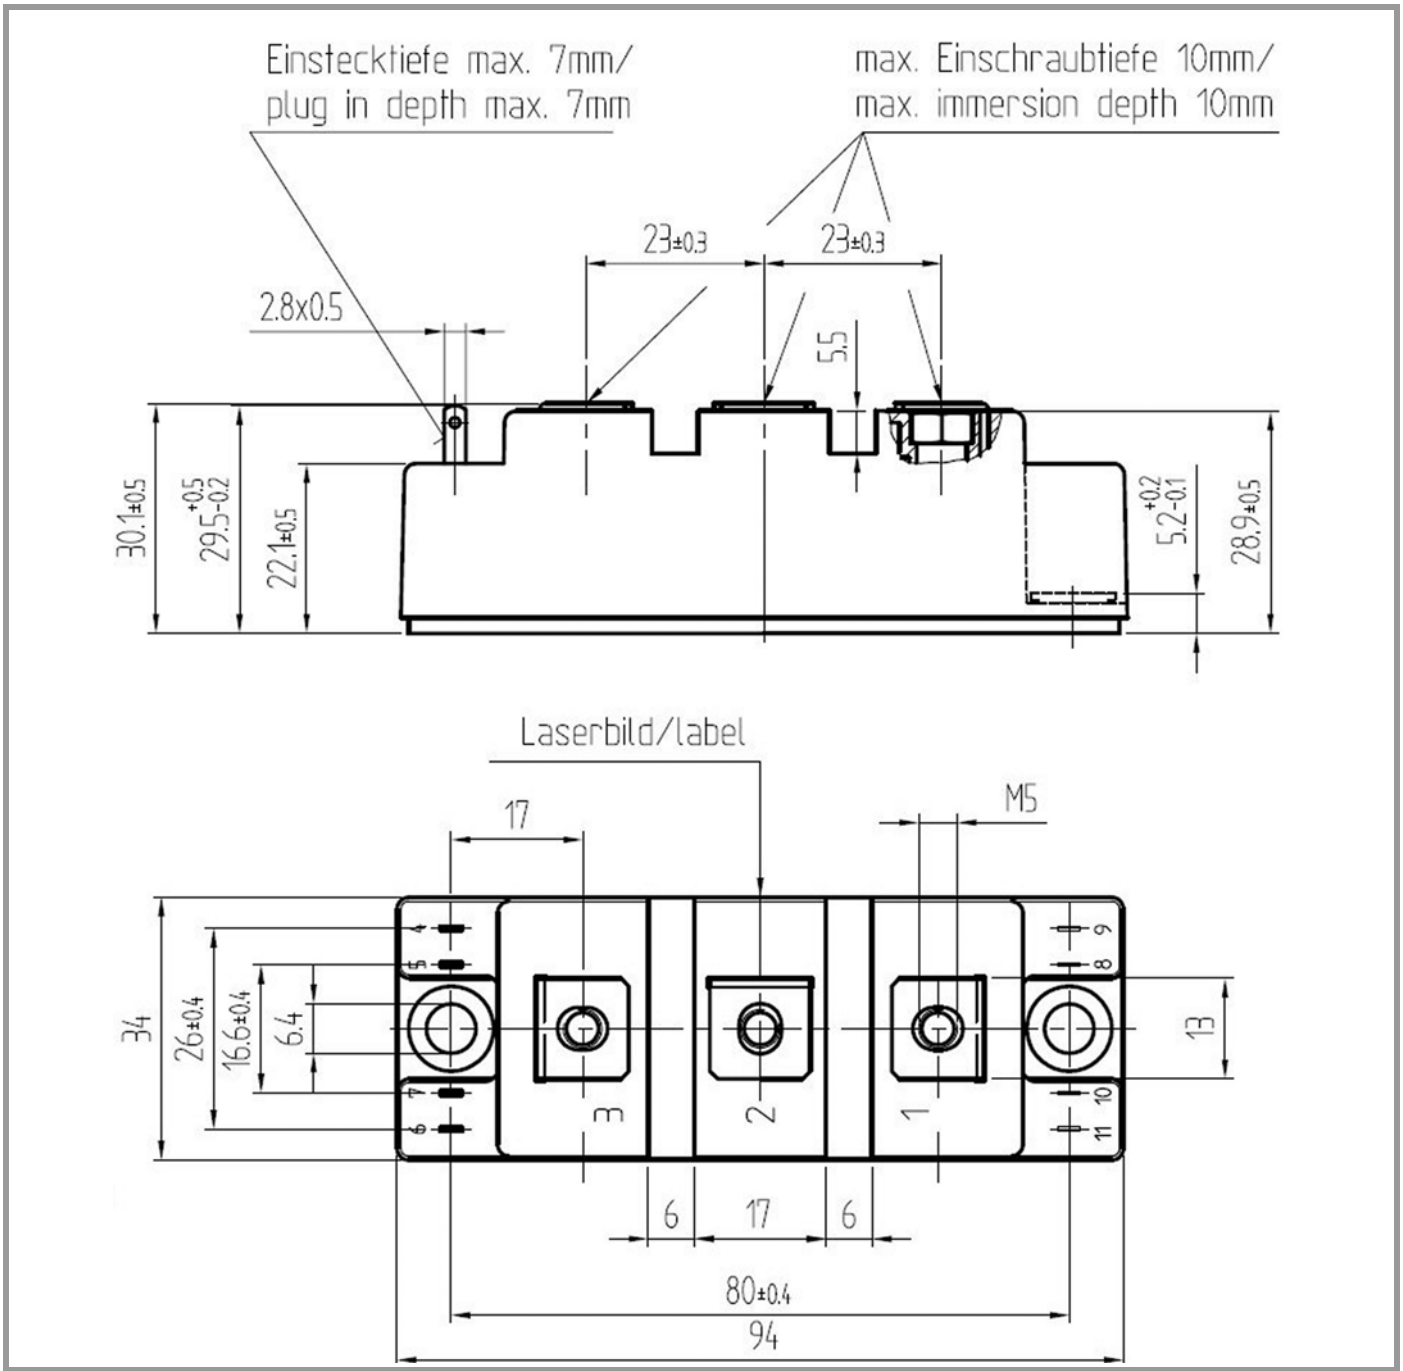

SEMITRANS 2

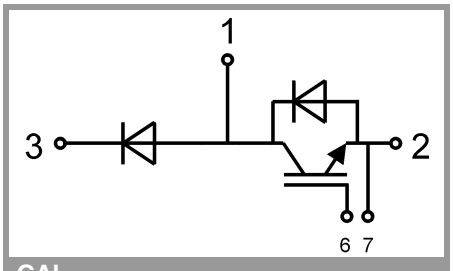

GAL

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our staff.