

关键参数
Key Parameters

V_{DSmax}		1200	V
$R_{DS(on)}$	Typ.	13	mΩ
I_D	Max.	153	A
Die Size		5.00×5.00	mm ²

特点
Features

- 高开关频率 High Switching Frequency
- 低开关损耗 Low Switching Loss
- 软、快速开关 Soft, fast Switching
- 易并联使用 Easy Paralleling


电路结构
Circuit Configuration


图 1. 电路结构

Fig. 1 Circuit configuration

最大额定值
Maximum Ratings

符号 Symbol	参数名称 Parameter	数值 Value	单位 Unit
V_{DSmax}	漏源极电压 Drain-source voltage	1200	V
V_{GSS}	栅源电压 Gate-source voltage	-10/+23	V
V_{GSop}	栅源电压 Gate-source voltage	-4/+18	V
I_D	持续正向电流, 由 $T_{vj\ max}$ 限制 Continuous forward current, limited by $T_{vj\ max}$	153	A
I_{DM}	最大重复正向电流, 由 $T_{vj\ max}$ 限制 Maximum repetitive forward current, limited by $T_{vj\ max}$	306	A
$T_{vj\ max}$	最大允许结温 Max. Junction temperature	175	°C
$T_{vj(op)}$	工作结温 Operation junction temperature	-55...+175	°C
$T_{Proc}^{(*1)}$	最大加工温度 Maximum processing temperature	325	°C

电特性值
Electrical Characteristics

除非特别声明, 否则 $T_{vj} = 25\text{ }^{\circ}\text{C}$
 $T_{vj} = 25\text{ }^{\circ}\text{C}$ unless otherwise stated


符号 Symbol	参数名称 Parameter	测试条件 Test Conditions	最小值 Min.	典型值 Typ.	最大值 Max.	单位 Unit
I_{DSS}	零栅压漏极电流 Zero gate voltage drain current	$V_{GS} = 0V, V_{DS} = V_{DSS}$			20	μA
		$V_{GS} = 0V, V_{DS} = V_{DSS}, T_{vj} = 175\text{ }^{\circ}\text{C}$			20	μA
I_{GSS}	栅极漏电流 Gate leakage current	$V_{GS} = V_{GSS}, V_{DS} = 0V$			100	nA
$V_{GS(th)}^{(*2)}$	栅极-源极阈值电压 Gate threshold voltage	$I_D = 19.4\text{ mA}, V_{GS} = V_{DS}$	2.3	2.9	3.5	V
$R_{DS(on)}$	漏极-源极通态电阻 Drain-source on-state resistance	$V_{GS} = 18V, I_D = 77A$		12.5	14.1	m Ω
		$V_{GS} = 18V, I_D = 77A, T_{vj} = 175\text{ }^{\circ}\text{C}$		22		m Ω
g_{fs}	跨导 Forward transconductance	TBD		TBD		S
C_{iss}	输入电容 Input capacitance	$V_{DS} = 1000V, V_{GS} = 0V,$ $f = 100kHz, V_{AC} = 25mV$		6000		pF
C_{oss}	输出电容 Output capacitance			235		pF
C_{rss}	反向传输电容 Reverse transfer capacitance			10		pF
E_{oss}	电容存储能量 C_{oss} Stored Energy			TBD		μJ
R_{Gint}	内部栅极电阻 Internal gate resistor	$V_{GS} = 0V$		7		Ω
Q_{gs}	栅源电荷 Gate to source charge	TBD		TBD		nC
Q_{gd}	栅漏电荷 Gate to drain charge			TBD		nC
Q_g	总栅极电荷 Total gate charge			TBD		nC
V_{SD}	二极管正向电压 Diode forward voltage	$I_{SD} = 77A, V_{GS} = -4V$		4.5		V
		$I_{SD} = 77A, V_{GS} = -4V, T_{vj} = 175\text{ }^{\circ}\text{C}$		TBD		V

注意: 1. (*1) 表示最长持续时间 10min((*1) indicates 10min, maximum);

Note: 2. (*2) 表示做过预处理后的测试值((*2) indicates $V_{GS(th)}$ is preprocessed);

工艺参数值
Mechanical Parameters

芯片尺寸 Chip size	5.00×5.00	mm ²
源极键合区尺寸(不包含开尔文源级) Source pad size (excl. Kelvin Source pad)	2×(2.085×3.120)	mm ²
栅极键合区尺寸 Gate pad size	0.8×0.72	mm ²
总面积 Area total	25.00	mm ²
厚度 Thickness	120±10	μm
晶圆尺寸 Wafer size	150	mm
每片晶圆上最大芯片数 Max. possible chips per wafer	558	
正面金属 Frontside (Source and Gate) metal	Ni:Pd:Au (2.0:0.2:0.1μm)	
背面金属 Backside (Drain) metal	Ni:Pd:Au (2.0:0.2:0.1μm)	
正面钝化 Passivation frontside	Polyimide	
建议存储环境 Recommended storage environment	存储在原始容器中, 23°C 干燥氮气柜小于 6 个月 Store in original container, in dry nitrogen, <6 months at an ambient temperature of 23°C	

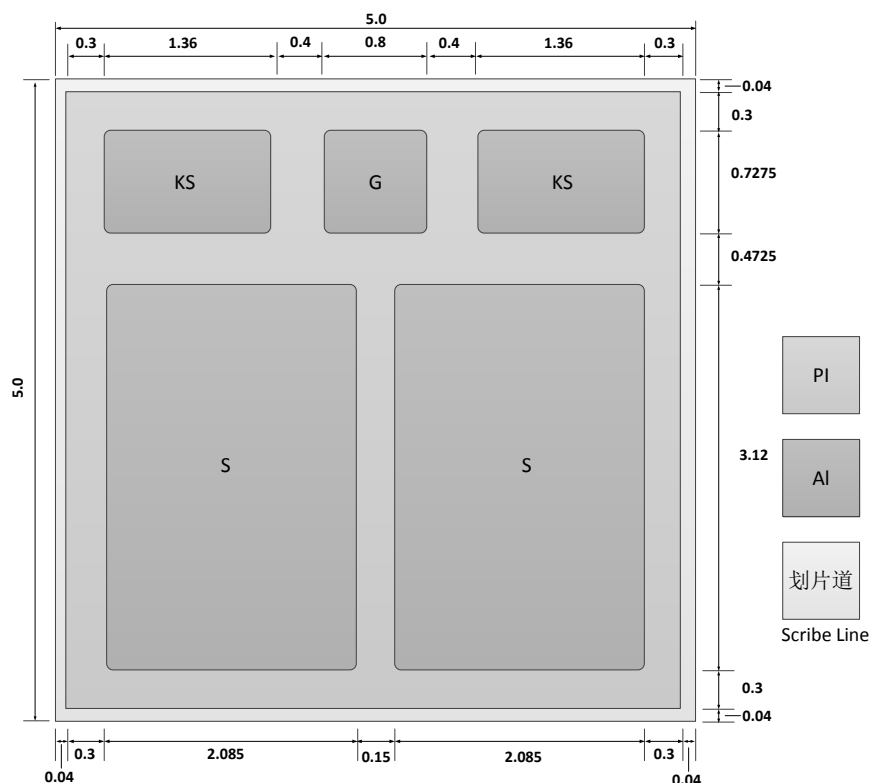

S=源极 G=栅极 KS=开尔文源极 单位: 毫米

S=Source G=Gate KS=Kelvin Source Unit: mm

图 2. 芯片外观尺寸

Fig. 2 Chip drawing

株洲中车时代半导体有限公司

ZHUZHOU CRRC TIMES SEMICONDUCTOR CO., LTD

地 址	Address	湖南省株洲市石峰区田心工业园	Tianxin Industrial Park, Shifeng District, ZhuZhou City, Hunan Province, China
邮 编	Zipcode	412001	
电 话	Telephone	+86 (0)731-28498268, 28498238, 28493472	
传 真	Fax	+86 (0)731-28498851, 28498494	
电子邮箱	Email	ctsc@csrzc.com	
网 址	Web Site	http://ctsc.csrzc.com	

使用条件和条款

(1) 数据手册中的产品信息是专门为技术人员提供的。由于产品应用的多样性，本文件所包含的信息只能作为一般性指南，无法保证其在某些特殊应用中的适用性，建议用户在使用前评估产品的适用性。如果需要额外的产品信息和帮助，请联系我公司的销售或技术支持。

(2) 本产品数据手册中提供的一部分产品数据是产品的典型值，实际出厂测试的产品数据可能与典型值略有偏离，但我公司保证这些偏离不会影响产品的正常使用。如果产品信息发生变更，我公司会及时修订产品数据手册，请随时关注我公司网站发布的产品手册信息。

(3) 如果对本产品有特殊要求，或用于特殊行业（如航空航天、医疗、生命维持等），强烈建议用户与我公司联合进行应用风险和产品质量评估，建立统一的质量协议。

(4) 产品使用过程中，如有超出产品数据手册中所定义的产品极限温度、电压、电流或安全工作区范围的情况，我公司无法保证产品的应用可靠性。

(5) 产品数据手册首页的右上角，会显示产品的状态。如果它尚未完全批准，会标示**初版 (preliminary)**，该标示意味着该产品已完成设计，量产的产品参数正在确定中，数据手册中的产品信息目前是可以参考的，但将来某些细节可能会发生变化。如果产品数据手册首页的右上角没有标注，则表示该产品已可以批量生产。

Terms and conditions of usage

(1) The product information in this datasheet are intended for use by technical personnel. Due to the diversity of product applications, the information contained in this document can only be used as a general guide, the application applicability cannot be guaranteed in some special applications. It is recommended that users do the assessment of the application applicability before applied. If users need additional product information and help, please contact our sales or technical support.

(2) Some product data in the datasheet of this product are the typical values, the actual factory testing data may deviate slightly from typical values, but our company guarantees that these deviations will not affect the normal use of the product. If the product information changes, our company will promptly amend the datasheet, please keeps your attention to product information changing in our company website.

(3) If there are special requirements for the product, or apply it in special industries (such as aerospace, medical, life support, etc.), we strongly recommend that to perform joint application risk and quality assessments, get the quality agreements.

(4) During the application, if the working conditions are beyond the limitation of temperature, voltage, current or safe operating area of the product defined in the product datasheet, our company cannot guarantee the reliability of the product.

(5) We annotate datasheet in the top right hand corner of the front page, to indicate product status. The annotation“Preliminary” indicates the product design is complete and final characterization for volume production is in progress, the product information in the datasheet is currently can be referenced, but some details may change in the future. There is no annotation indicates the product is capable to produce in batch quantity.