SKCD 71 C170I4FV1R

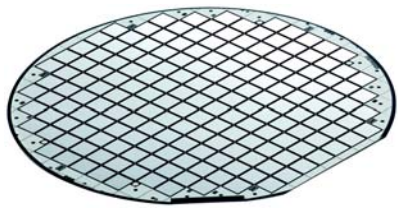

CAL-DIODE

$I_{F(DC)}$ = 130 A [1)]
V_{RRM} = 1700 V
Size: 9.5 x 7.5 mm²

SKCD 71 C170I4FV1R

Features*

- max. junction temperature 175 °C
- low forward voltage drop
- soft reverse recovery behavior
- low switching losses

Typical Applications

- freewheeling diode for IGBT

Footnotes

[1)] Nominal IGBT I_F rating,
verified by design and characterization



SKCD

Absolute Maximum Ratings

Symbol	Conditions		Values	Unit
V_{RRM}	T_j = 25 °C, I_R = 0.1 mA		1700	V
I_{FSM}	10 ms sin 180°	T_j = 25 °C	800	A
		T_j = 150 °C	720	A
i^2t	T_j = 150 °C, t_p = 10 ms, sin 180°		2592	A^2s
T_{jmax}			175	°C

Electrical Characteristics

Symbol	Conditions	min.	typ.	max.	Unit
$I_{F(AV)}$	T_c = 80 °C, T_j = 175 °C, F_i=PI/2, $R_{th(j-c)}$ = 0.36 K/W, Semitrans Assembly		92		A
I_R	T_j = 25 °C, V_{RRM} = 1700 V			0.1	mA
	T_j = 150 °C, V_{RRM} = 1700 V			33.00	mA
V_F	T_j = 25 °C, I_F = 73 A		1.71	2.04	V
	T_j = 150 °C, I_F = 73 A		1.69	1.99	V
	T_j = 175 °C, I_F = 73 A		1.61	1.92	V
V_{F0}	T_j = 150 °C		1.08	1.22	V
r_F	T_j = 150 °C		8.36	10.55	mΩ
V_{F0}	T_j = 175 °C		1.01	1.19	V
r_F	T_j = 175 °C		8.22	10.00	mΩ

Dynamic Characteristics

Symbol	Conditions	min.	typ.	max.	Unit
E_{rr}	T_j = 25 °C, 130 A, 1200 V, 2500 A/µs		14		mJ
E_{rr}	T_j = 150 °C, 130 A, 1200 V, 2500 A/µs		30		mJ
Q_{rr}	T_j = 25 °C, 130 A, 1200 V, 2500 A/µs		22		µC
Q_{rr}	T_j = 150 °C, 130 A, 1200 V, 2500 A/µs		41		µC
I_{rrm}	T_j = 25 °C, 130 A, 1200 V, 2500 A/µs		105		A
I_{rrm}	T_j = 150 °C, 130 A, 1200 V, 2500 A/µs		130		A

Thermal Characteristics

Symbol	Conditions	min.	typ.	max.	Unit
T_j		-40		175	°C
T_{stg}		-40		175	°C
T_{solder}	10 min.			250	°C
T_{solder}	5 min.			320	°C

Mechanical Characteristics

Symbol	Conditions	Values	Unit
Raster size		9.5 x 7.5	mm^2
Area total		71.25	mm^2
Anode	Metallization	bondable (Al)	
Cathode	Metallization	solderable (Ag/Ni)	
Wire bond		Al, typ. diameter = 300 µm	
Chips / Package	150 mm wafer on frame	199	pcs

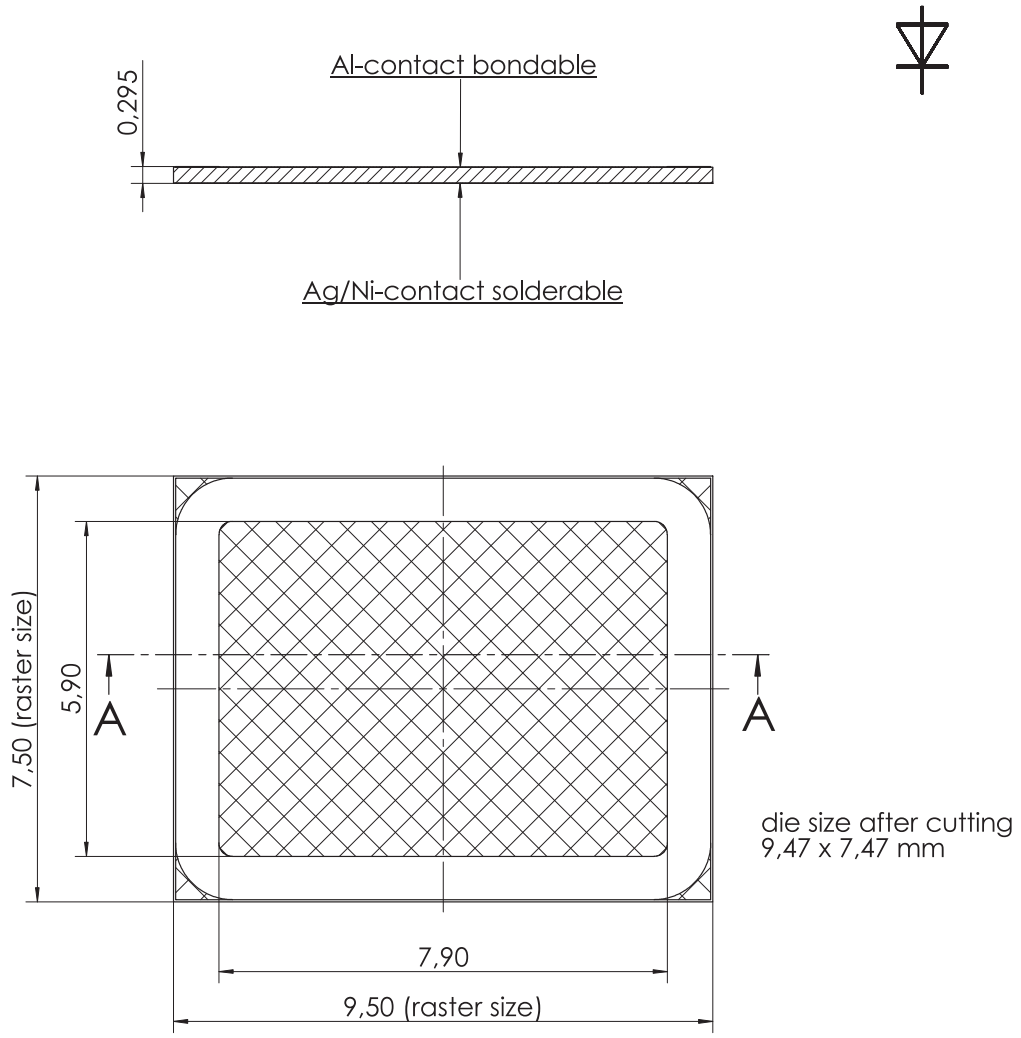

This is an electrostatic discharge sensitive device (ESDS) due to international standard IEC 61340.

***IMPORTANT INFORMATION AND WARNINGS**

The specifications of SEMIKRON products may not be considered as guarantee or assurance of product characteristics ("Beschaffenheitsgarantie"). The specifications of SEMIKRON products describe only the usual characteristics of products to be expected in typical applications, which may still vary depending on the specific application. Therefore, products must be tested for the respective application in advance. Application adjustments may be necessary. The user of SEMIKRON products is responsible for the safety of their applications embedding SEMIKRON products and must take adequate safety measures to prevent the applications from causing a physical injury, fire or other problem if any of SEMIKRON products become faulty. The user is responsible to make sure that the application design is compliant with all applicable laws, regulations, norms and standards. Except as otherwise explicitly approved by SEMIKRON in a written document signed by authorized representatives of SEMIKRON, SEMIKRON products may not be used in any applications where a failure of the product or any consequences of the use thereof can reasonably be expected to result in personal injury. No representation or warranty is given and no liability is assumed with respect to the accuracy, completeness and/or use of any information herein, including without limitation, warranties of non-infringement of intellectual property rights of any third party. SEMIKRON does not assume any liability arising out of the applications or use of any product; neither does it convey any license under its patent rights, copyrights, trade secrets or other intellectual property rights, nor the rights of others. SEMIKRON makes no representation or warranty of non-infringement or alleged non-infringement of intellectual property rights of any third party which may arise from applications. Due to technical requirements our products may contain dangerous substances. For information on the types in question please contact the nearest SEMIKRON sales office. This document supersedes and replaces all information previously supplied and may be superseded by updates. SEMIKRON reserves the right to make changes.